

Siemens  
EcoTech



circuit breaker frame size S00 for system protection with approval circuit breaker UL 489, CSA C22.2 no. 5-02 thermal overload release 15 A short-circuit release 208 A screw terminal standard switching capacity

|   |   |
|---|---|
| <b>product brand name</b>   | SIRIUS  |
| <b>product designation</b>  | Circuit breaker   |
| <b>design of the product</b>  | For system protection according to UL 489/CSA C22.2 No. 5 |
| <b>product type designation</b>   | 3RV2  |
| <b>General technical data</b>   |   |
| <b>Product equipment of circuit breaker for motor protection complete unit with protection device</b> | Yes   |
| <b>size of the circuit-breaker</b>  | S00   |
| product function disconnecter functionality   | Yes   |
| product extension auxiliary switch  | Yes   |
| <b>power loss [W] for rated value of the current</b>  |   |
| • at AC in hot operating state  | 9.25 W  |
| • at AC in hot operating state per pole   | 3.1 W   |
| <b>type of calculation of power loss current-dependent</b>  | quadratic   |
| insulation voltage with degree of pollution 3 at AC rated value                                       | 690 V   |
| <b>surge voltage resistance rated value</b>   | 6 kV  |
| <b>maximum permissible voltage for protective separation</b>  |   |
| • in networks with ungrounded star point between main and auxiliary circuit                           | 400 V   |
| • in networks with grounded star point between main and auxiliary circuit                             | 400 V   |
| <b>protection class IP</b>  |   |
| • on the front according to IEC 60529   | IP20  |
| • on the front  | IP20  |
| • of the terminal   | IP00  |
| <b>shock resistance according to IEC 60068-2-27</b>   | 25 g / 11 ms (rectangular impulse and sine pulse)         |
| <b>mechanical service life (operating cycles)</b>   |   |
| • of the main contacts typical  | 100 000   |
| • of auxiliary contacts typical   | 100 000   |
| electrical endurance (operating cycles) typical   | 100 000   |
| <b>reference code according to IEC 81346-2</b>  | Q   |
| <b>continuous current rated value</b>   | 15 A  |
| <b>Substance Prohibitance (day/month/year)</b>  | 10/01/2009  |
| <b>Net Weight</b>   | 505 g   |
| <b>Ambient conditions</b>   |   |
| installation altitude at height above sea level maximum   | 2 000 m   |
| <b>ambient temperature</b>  |   |

|  |                |
|--|----------------|
| <ul style="list-style-type: none"> <li>during operation</li> </ul> | -20 ... +60 °C |
| <ul style="list-style-type: none"> <li>during storage</li> </ul>   | -50 ... +80 °C |
| <ul style="list-style-type: none"> <li>during transport</li> </ul> | -50 ... +80 °C |
| <b>temperature compensation</b>                                    | -20 ... +60 °C |
| relative humidity during operation                                 | 10 ... 95 %    |

#### Main circuit

|  |              |
|--|--------------|
| <b>number of poles for main current circuit</b>  | 3            |
| <b>type of voltage for main current circuit</b>  | AC           |
| <b>operating voltage</b>   |              |
| <ul style="list-style-type: none"> <li>rated value</li> </ul>  | 690 V        |
| <ul style="list-style-type: none"> <li>rated value</li> </ul>  | 20 ... 690 V |
| <ul style="list-style-type: none"> <li>at AC-3 rated value maximum</li> </ul>  | 690 V        |
| <ul style="list-style-type: none"> <li>at AC-3e rated value maximum</li> </ul>   | 690 V        |
| <b>operating frequency rated value</b>   | 50 ... 60 Hz |
| <b>operational current rated value</b>   | 15 A         |
| <b>operational current</b>   |              |
| <ul style="list-style-type: none"> <li>at AC-3 at 400 V rated value</li> </ul>   | 15 A         |
| <ul style="list-style-type: none"> <li>at AC-3e at 400 V rated value</li> </ul>  | 15 A         |
| <b>operating power</b>   |              |
| <ul style="list-style-type: none"> <li>at AC-3</li> </ul>  |              |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>at 230 V rated value</li> </ul> </li> </ul> | 4 kW         |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>at 400 V rated value</li> </ul> </li> </ul> | 7.5 kW       |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>at 500 V rated value</li> </ul> </li> </ul> | 7.5 kW       |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>at 690 V rated value</li> </ul> </li> </ul> | 11 kW        |
| <ul style="list-style-type: none"> <li>at AC-3e</li> </ul>   |              |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>at 230 V rated value</li> </ul> </li> </ul> | 4 kW         |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>at 400 V rated value</li> </ul> </li> </ul> | 7.5 kW       |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>at 500 V rated value</li> </ul> </li> </ul> | 7.5 kW       |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>at 690 V rated value</li> </ul> </li> </ul> | 11 kW        |
| <b>operating frequency</b>   |              |
| <ul style="list-style-type: none"> <li>at AC-3 maximum</li> </ul>  | 15 1/h       |
| <ul style="list-style-type: none"> <li>at AC-3e maximum</li> </ul>   | 15 1/h       |

#### Auxiliary circuit

|  |       |
|--|-------|
| <b>type of voltage for auxiliary and control circuit</b> | AC/DC |
| <b>number of NC contacts for auxiliary contacts</b>      | 0     |
| <b>number of NO contacts for auxiliary contacts</b>      | 0     |
| number of CO contacts for auxiliary contacts             | 0     |

#### Protective and monitoring functions

|   |         |
|---|---------|
| <b>product function</b>   |         |
| <ul style="list-style-type: none"> <li>ground fault detection</li> </ul>                            | No      |
| <ul style="list-style-type: none"> <li>phase failure detection</li> </ul>                           | No      |
| <b>design of the overload release</b>   | thermal |
| <b>protection function thermal overload protection (ANSI 49)</b>                                    | Yes     |
| <b>maximum short-circuit current breaking capacity (Icu)</b>  |         |
| <ul style="list-style-type: none"> <li>at AC at 240 V rated value</li> </ul>                        | 100 kA  |
| <ul style="list-style-type: none"> <li>at AC at 400 V rated value</li> </ul>                        | 55 kA   |
| <ul style="list-style-type: none"> <li>at AC at 500 V rated value</li> </ul>                        | 10 kA   |
| <ul style="list-style-type: none"> <li>at AC at 690 V rated value</li> </ul>                        | 4 kA    |
| <ul style="list-style-type: none"> <li>at 480 AC Y/277 V according to UL 489 rated value</li> </ul> | 65 kA   |
| <b>operating short-circuit current breaking capacity (Ics) at AC</b>                                |         |
| <ul style="list-style-type: none"> <li>at 240 V rated value</li> </ul>                              | 100 kA  |
| <ul style="list-style-type: none"> <li>at 400 V rated value</li> </ul>                              | 30 kA   |
| <ul style="list-style-type: none"> <li>at 500 V rated value</li> </ul>                              | 5 kA    |
| <ul style="list-style-type: none"> <li>at 690 V rated value</li> </ul>                              | 2 kA    |
| response value current of instantaneous short-circuit trip unit                                     | 208 A   |

#### Short-circuit protection

|   |          |
|---|----------|
| <b>product function short circuit protection</b>                | Yes      |
| <b>design of the short-circuit trip</b>                         | magnetic |
| <b>design of the fuse link for IT network for short-circuit</b> |          |



|   |                    |
|---|--------------------|
| <b>tightening torque</b>  |                    |
| <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> </ul> | 2.5 ... 3 N·m      |
| <b>design of screwdriver shaft</b>  | Diameter 5 to 6 mm |
| <b>size of the screwdriver tip</b>  | Pozidriv size 2    |
| <b>design of the thread of the connection screw</b>   |                    |
| <ul style="list-style-type: none"> <li>for main contacts</li> </ul>                           | M4                 |

**Safety related data**

|   |        |
|---|--------|
| product function suitable for safety function   | Yes    |
| <b>suitability for use</b>  |        |
| <ul style="list-style-type: none"> <li>safety-related switching on</li> </ul>                 | No     |
| <ul style="list-style-type: none"> <li>safety-related switching OFF</li> </ul>                | Yes    |
| <b>service life maximum</b>   | 10 a   |
| <b>test wear-related service life necessary</b>   | Yes    |
| <b>proportion of dangerous failures</b>   |        |
| <ul style="list-style-type: none"> <li>with low demand rate according to SN 31920</li> </ul>  | 40 %   |
| <ul style="list-style-type: none"> <li>with high demand rate according to SN 31920</li> </ul> | 50 %   |
| <b>B10 value with high demand rate according to SN 31920</b>                                  | 5 000  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>                          | 50 FIT |

ISO 13849

|  |     |
|--|-----|
| <b>device type according to ISO 13849-1</b>                | 3   |
| <b>overdimensioning according to ISO 13849-2 necessary</b> | Yes |

IEC 61508

|  |        |
|--|--------|
| <b>safety device type according to IEC 61508-2</b>   | Type A |
| <b>T1 value</b>  |        |
| <ul style="list-style-type: none"> <li>for proof test interval or service life according to IEC 61508</li> </ul> | 10 a   |

Electrical Safety

|  |  |
|--|--|
| <b>protection class IP on the front according to IEC 60529</b> | IP20   |
| <b>touch protection on the front according to IEC 60529</b>    | finger-safe, for vertical contact from the front |

**Display**

|                                      |        |
|--------------------------------------|--------|
| display version for switching status | Handle |
|--------------------------------------|--------|

**Approvals Certificates**

|  |           |
|--|-----------|
| Environmental Product Declaration  |           |
| <ul style="list-style-type: none"> <li>global warming potential [CO2 eq] / during manufacturing</li> </ul> | 1.98 kg   |
| <ul style="list-style-type: none"> <li>global warming potential [CO2 eq] / during sales</li> </ul>         | 0.134 kg  |
| <ul style="list-style-type: none"> <li>global warming potential [CO2 eq] / during operation</li> </ul>     | 72.7 kg   |
| <ul style="list-style-type: none"> <li>global warming potential [CO2 eq] / after end of life</li> </ul>    | -0.116 kg |
| <ul style="list-style-type: none"> <li>global warming potential [CO2 eq] / total</li> </ul>                | 74.698 kg |

**Environment** **General Product Approval**

[Environmental Conformations](#)



**General Product Approval** **Test Certificates**



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

**Maritime application** **other**



[Confirmation](#)

[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)



[Special Test Certificate](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2711-4AD10>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-4AD10>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2711-4AD10&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2711-4AD10&lang=en)

##### Cax online generator

<https://support.automation.siemens.com/WW/CAxorder/default.aspx?lang=en&mlfb=3RV2711-4AD10>

##### Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

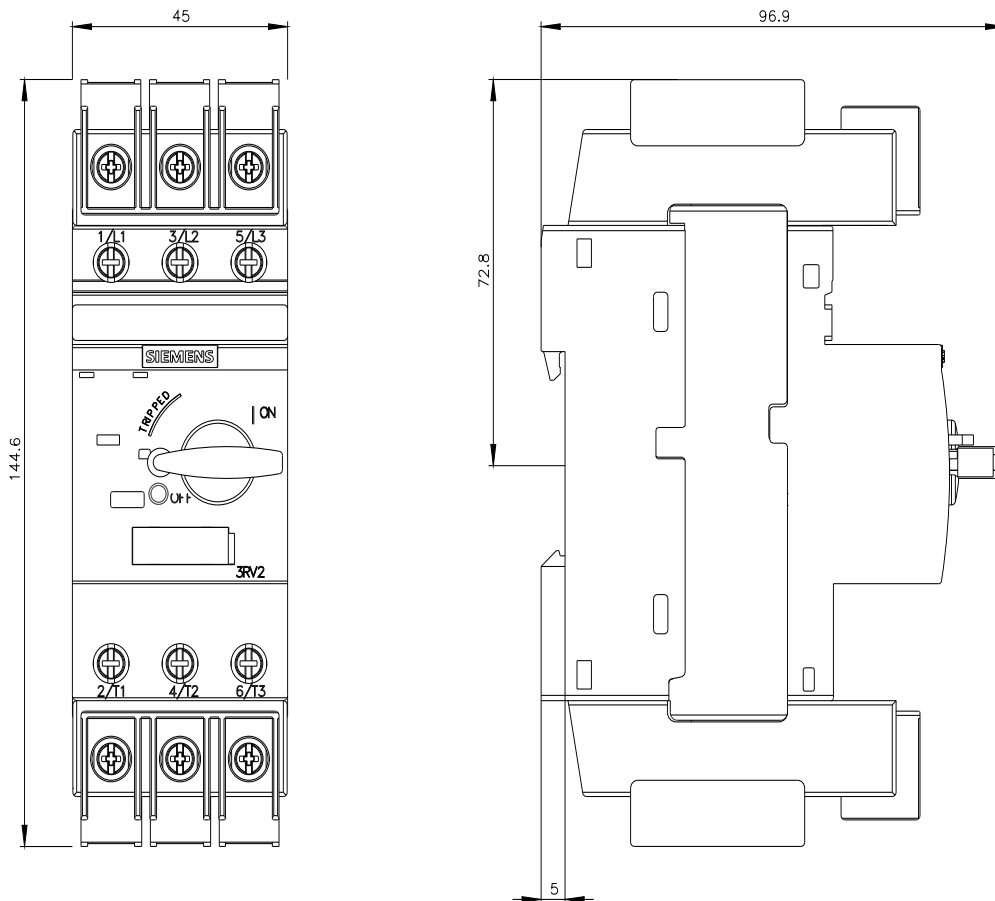



last modified:

5/5/2026