



SIRIUS soft starter 200-480 V 38 A, 110-250 V AC Screw terminals Thermistor input

| | |
|---|---|
| product brand name | SIRIUS |
| product category | Hybrid switching devices |
| product designation | Soft starter |
| product type designation | 3RW52 |
| manufacturer's article number | |
| <ul style="list-style-type: none"> • of standard HMI module usable • of high feature HMI module usable • of communication module PROFINET standard usable • of communication module PROFIBUS usable • of communication module Modbus TCP usable • of communication module Modbus RTU usable • of communication module Ethernet/IP • of circuit breaker usable at 400 V • of circuit breaker usable at 500 V • of circuit breaker usable at 400 V at inside-delta circuit • of circuit breaker usable at 500 V at inside-delta circuit • of the gG fuse usable up to 690 V • of the gG fuse usable at inside-delta circuit up to 500 V • of full range R fuse link for semiconductor protection usable up to 690 V • of back-up R fuse link for semiconductor protection usable up to 690 V | <ul style="list-style-type: none"> 3RW5980-0HS00 3RW5980-0HF00 3RW5980-0CS00 3RW5980-0CP00 3RW5980-0CT00 3RW5980-0CR00 3RW5980-0CE00 3RV2032-4WA10; Type of coordination 1, Iq = 65 kA, CLASS 10 3RV2032-4WA10; Type of coordination 1, Iq = 10 kA, CLASS 10 3RV2032-4RA10; Type of coordination 1, Iq = 65 kA, CLASS 10 3RV2032-4RA10; Type of coordination 1, Iq = 10 kA, CLASS 10 3NA3824-6; Type of coordination 1, Iq = 65 kA 3NA3824-6; Type of coordination 1, Iq = 65 kA 3NE1820-0; Type of coordination 2, Iq = 65 kA 3NE8024-1; Type of coordination 2, Iq = 65 kA |

| General technical data | |
|--|---|
| starting voltage [%] | 30 ... 100 % |
| stopping voltage [%] | 50 %; non-adjustable |
| start-up ramp time of soft starter | 0 ... 20 s |
| current limiting value [%] adjustable | 130 ... 700 % |
| certificate of suitability | |
| <ul style="list-style-type: none"> • CE marking • UL approval • CSA approval | <ul style="list-style-type: none"> Yes Yes Yes |
| product component | |
| <ul style="list-style-type: none"> • HMI-High Feature • is supported HMI-Standard • is supported HMI-High Feature | <ul style="list-style-type: none"> No Yes Yes |
| product feature integrated bypass contact system | Yes |
| number of controlled phases | 3 |

| | |
|--|---|
| buffering time in the event of power failure | |
| • for main current circuit | 100 ms |
| • for control circuit | 100 ms |
| insulation voltage rated value | 600 V |
| degree of pollution | 3, acc. to IEC 60947-4-2 |
| impulse voltage rated value | 6 kV |
| blocking voltage of the thyristor maximum | 1 600 V |
| service factor | 1 |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for protective separation | |
| • between main and auxiliary circuit | 600 V |
| shock resistance | 15 g / 11 ms, from 12 g / 11 ms with potential contact lifting |
| vibration resistance | 15 mm to 6 Hz; 2 g to 500 Hz |
| utilization category according to IEC 60947-4-2 | AC 53a |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (day/month/year) | 02/15/2018 |
| SVHC substance name | Lead CAS-No. 7439-92-1 Lead monoxide (lead oxide) CAS-No. 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol CAS-No. 79-94-7 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 Melamine CAS-No. 108-78-1 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol CAS-No. 119-47-1 Dibutylbis(pentane-2,4-dionato-O,O')tin CAS-No. 22673-19-4 Diboron trioxide CAS-No. 1303-86-2 |
| Net Weight | 3.092 kg |
| product function | |
| • ramp-up (soft starting) | Yes |
| • soft stopping | Yes |
| • Soft Torque | Yes |
| • adjustable current limitation | Yes |
| • pump stop | Yes |
| • intrinsic device protection | Yes |
| • motor overload protection | Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) |
| • evaluation of thermistor motor protection | Yes; Type A PTC or Klixon / Thermoclick |
| • inside-delta circuit | Yes |
| • auto-RESET | Yes |
| • manual RESET | Yes |
| • remote reset | Yes; By turning off the control supply voltage |
| • communication function | Yes |
| • operating measured value display | Yes; Only in conjunction with special accessories |
| • error logbook | Yes; Only in conjunction with special accessories |
| • via software parameterizable | No |
| • via software configurable | Yes |
| • PROFenergy | Yes; in connection with the PROFINET Standard communication module |
| • firmware update | Yes |
| • removable terminal for control circuit | Yes |
| • torque control | No |
| • analog output | No |
| Power Electronics | |
| operational current | |
| • at 40 °C rated value | 38 A |
| • at 50 °C rated value | 33.5 A |
| • at 60 °C rated value | 30.5 A |
| operational current at inside-delta circuit | |
| • at 40 °C rated value | 65.8 A |
| • at 50 °C rated value | 58 A |
| • at 60 °C rated value | 52.8 A |
| operating voltage | |
| • rated value | 200 ... 480 V |

| | |
|--|---------------|
| <ul style="list-style-type: none"> • at inside-delta circuit rated value | 200 ... 480 V |
| relative negative tolerance of the operating voltage | -15 % |
| relative positive tolerance of the operating voltage | 10 % |
| relative negative tolerance of the operating voltage at inside-delta circuit | -15 % |
| relative positive tolerance of the operating voltage at inside-delta circuit | 10 % |
| operating power for 3-phase motors | |
| <ul style="list-style-type: none"> • at 230 V at 40 °C rated value | 11 kW |
| <ul style="list-style-type: none"> • at 230 V at inside-delta circuit at 40 °C rated value | 18.5 kW |
| <ul style="list-style-type: none"> • at 400 V at 40 °C rated value | 18.5 kW |
| <ul style="list-style-type: none"> • at 400 V at inside-delta circuit at 40 °C rated value | 30 kW |
| Operating frequency 1 rated value | 50 Hz |
| Operating frequency 2 rated value | 60 Hz |
| relative negative tolerance of the operating frequency | -10 % |
| relative positive tolerance of the operating frequency | 10 % |
| adjustable motor current | |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 1 | 15.5 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 2 | 17 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 3 | 18.5 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 4 | 20 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 5 | 21.5 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 6 | 23 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 7 | 24.5 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 8 | 26 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 9 | 27.5 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 10 | 29 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 11 | 30.5 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 12 | 32 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 13 | 33.5 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 14 | 35 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 15 | 36.5 A |
| <ul style="list-style-type: none"> • at rotary coding switch on switch position 16 | 38 A |
| <ul style="list-style-type: none"> • minimum | 15.5 A |
| adjustable motor current | |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 1 | 26.8 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 2 | 29.4 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 3 | 32 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 4 | 34.6 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 5 | 37.2 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 6 | 39.8 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 7 | 42.4 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 8 | 45 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 9 | 47.6 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 10 | 50.2 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 11 | 52.8 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 12 | 55.4 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 13 | 58 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 14 | 60.6 A |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch | 63.2 A |

| | |
|--|--|
| position 15 | |
| <ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 16 | 65.8 A |
| <ul style="list-style-type: none"> • at inside-delta circuit minimum | 26.8 A |
| minimum load [%] | 15 %; Relative to smallest settable I _e |
| power loss [W] for rated value of the current at AC | |
| <ul style="list-style-type: none"> • at 40 °C after startup | 23 W |
| <ul style="list-style-type: none"> • at 50 °C after startup | 22 W |
| <ul style="list-style-type: none"> • at 60 °C after startup | 21 W |
| power loss [W] at AC at current limitation 350 % | |
| <ul style="list-style-type: none"> • at 40 °C during startup | 628 W |
| <ul style="list-style-type: none"> • at 50 °C during startup | 526 W |
| <ul style="list-style-type: none"> • at 60 °C during startup | 464 W |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC |
| control supply voltage at AC | |
| <ul style="list-style-type: none"> • at 50 Hz | 110 ... 250 V |
| <ul style="list-style-type: none"> • at 60 Hz | 110 ... 250 V |
| relative negative tolerance of the control supply voltage at AC at 50 Hz | -15 % |
| relative positive tolerance of the control supply voltage at AC at 50 Hz | 10 % |
| relative negative tolerance of the control supply voltage at AC at 60 Hz | -15 % |
| relative positive tolerance of the control supply voltage at AC at 60 Hz | 10 % |
| control supply voltage frequency | 50 ... 60 Hz |
| relative negative tolerance of the control supply voltage frequency | -10 % |
| relative positive tolerance of the control supply voltage frequency | 10 % |
| control supply current in standby mode rated value | 30 mA |
| holding current in bypass operation rated value | 75 mA |
| inrush current by closing the bypass contacts maximum | 0.17 A |
| inrush current peak at application of control supply voltage maximum | 12.2 A |
| duration of inrush current peak at application of control supply voltage | 2.2 ms |
| design of the overvoltage protection | Varistor |
| design of short-circuit protection for control circuit | 4 A gG fuse (I _{cu} =1 kA), 6 A quick-acting fuse (I _{cu} =1 kA), C1 miniature circuit breaker (I _{cu} = 600 A), C6 miniature circuit breaker (I _{cu} = 300 A); Is not part of scope of supply |
| Inputs/ Outputs | |
| number of digital inputs | 1 |
| number of digital outputs | 3 |
| <ul style="list-style-type: none"> • not parameterizable | 2 |
| digital output version | 2 normally-open contacts (NO) / 1 changeover contact (CO) |
| number of analog outputs | 0 |
| switching capacity current of the relay outputs | |
| <ul style="list-style-type: none"> • at AC-15 at 250 V rated value | 3 A |
| <ul style="list-style-type: none"> • at DC-13 at 24 V rated value | 1 A |
| Installation/ mounting/ dimensions | |
| mounting position | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back |
| fastening method | screw fixing |
| height | 275 mm |
| width | 170 mm |
| depth | 152 mm |
| required spacing with side-by-side mounting | |
| <ul style="list-style-type: none"> • forwards | 10 mm |
| <ul style="list-style-type: none"> • backwards | 0 mm |
| <ul style="list-style-type: none"> • upwards | 100 mm |

| | |
|---|---|
| <ul style="list-style-type: none"> • downwards | 75 mm |
| <ul style="list-style-type: none"> • at the side | 5 mm |
| weight without packaging | 2.3 kg |
| Connections/ Terminals | |
| type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit | screw-type terminals |
| <ul style="list-style-type: none"> • for control circuit | screw-type terminals |
| wire length for thermistor connection | |
| <ul style="list-style-type: none"> • with conductor cross-section = 0.5 mm² maximum | 50 m |
| <ul style="list-style-type: none"> • with conductor cross-section = 1.5 mm² maximum | 150 m |
| <ul style="list-style-type: none"> • with conductor cross-section = 2.5 mm² maximum | 250 m |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing | 2x (1.0 ... 2.5 mm ²), 2x (2.5 ... 10 mm ²) 2x (1.0 ... 2.5 mm ²), 2x (2.5 ... 6.0 mm ²) |
| <ul style="list-style-type: none"> • for AWG cables for main current circuit solid | 2x (16 ... 12), 2x (14 ... 8) |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for control circuit solid | 1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²) |
| <ul style="list-style-type: none"> • for control circuit finely stranded with core end processing | 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> • for AWG cables for control circuit solid | 1x (20 ... 12), 2x (20 ... 14) |
| wire length | |
| <ul style="list-style-type: none"> • between soft starter and motor maximum | 800 m |
| <ul style="list-style-type: none"> • at the digital inputs at AC maximum | 100 m |
| tightening torque | |
| <ul style="list-style-type: none"> • for main contacts with screw-type terminals | 2 ... 2.5 N·m |
| <ul style="list-style-type: none"> • for auxiliary and control contacts with screw-type terminals | 0.8 ... 1.2 N·m |
| tightening torque [lbf·in] | |
| <ul style="list-style-type: none"> • for main contacts with screw-type terminals | 18 ... 22 lbf·in |
| <ul style="list-style-type: none"> • for auxiliary and control contacts with screw-type terminals | 7 ... 10.3 lbf·in |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 5 000 m |
| ambient temperature | |
| <ul style="list-style-type: none"> • during operation | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above |
| <ul style="list-style-type: none"> • during storage and transport | -40 ... +80 °C |
| environmental category | |
| <ul style="list-style-type: none"> • during operation according to IEC 60721 | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| <ul style="list-style-type: none"> • during storage according to IEC 60721 | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 |
| <ul style="list-style-type: none"> • during transport according to IEC 60721 | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) |
| Electromagnetic compatibility | |
| EMC emitted interference | acc. to IEC 60947-4-2: Class A |
| Communication/ Protocol | |
| communication module is supported | |
| <ul style="list-style-type: none"> • PROFINET standard | Yes |
| <ul style="list-style-type: none"> • EtherNet/IP | Yes |
| <ul style="list-style-type: none"> • Modbus RTU | Yes |
| <ul style="list-style-type: none"> • Modbus TCP | Yes |
| <ul style="list-style-type: none"> • PROFIBUS | Yes |
| UL/CSA ratings | |
| manufacturer's article number | |
| <ul style="list-style-type: none"> • of circuit breaker usable for Standard Faults <ul style="list-style-type: none"> — at 460/480 V according to UL — 60/480 V according to UL — at 460/480 V at inside-delta circuit according to UL — 60/480 V at inside-delta circuit according to UL — at 575/600 V according to UL — at 575/600 V at inside-delta circuit according to UL | Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; I _q = 5 kA Siemens type: 3RV2742, max.40 A or 3VA51, max. 60 A; I _q max = 65 kA Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; I _q = 5 kA Siemens type: 3VA51, max. 60 A; I _q max = 65 kA Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; I _q = 5 kA Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; I _q = 5 kA |

| | |
|---|--|
| <ul style="list-style-type: none"> • of the fuse <ul style="list-style-type: none"> — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up to 575/600 V according to UL | Type: Class RK5 / K5, max. 150 A; Iq = 5 kA Type: Class J / L, max. 150 A; Iq = 100 kA Type: Class RK5 / K5, max. 150 A; Iq = 5 kA Type: Class J / L, max. 150 A; Iq = 100 kA |
|---|--|

| | |
|---|--|
| operating power [hp] for 3-phase motors <ul style="list-style-type: none"> • at 200/208 V at 50 °C rated value • at 220/230 V at 50 °C rated value • at 460/480 V at 50 °C rated value • at 200/208 V at inside-delta circuit at 50 °C rated value • at 220/230 V at inside-delta circuit at 50 °C rated value • at 460/480 V at inside-delta circuit at 50 °C rated value | 10 hp 10 hp 20 hp 15 hp 20 hp 40 hp |
|---|--|

| | |
|---|-----------|
| contact rating of auxiliary contacts according to UL | R300-B300 |
|---|-----------|

Electrical Safety

| | |
|--|------|
| protection class IP on the front according to IEC 60529 | IP20 |
|--|------|

| | |
|---|--|
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
|---|--|

Approvals Certificates

Environmental Product Declaration

| | |
|--|--|
| <ul style="list-style-type: none"> • global warming potential [CO2 eq] / during manufacturing • global warming potential [CO2 eq] / during sales • global warming potential [CO2 eq] / during operation • global warming potential [CO2 eq] / after end of life • global warming potential [CO2 eq] / total | 37.2 kg 0.66 kg 152 kg -4.19 kg 185 kg |
|--|--|

Environment **General Product Approval**

[Environmental Confirmations](#)



General Product Approval **EMV** **Test Certificates** **Maritime application**



[Type Test Certificates/Test Report](#)



Maritime application **other**



[Confirmation](#)

[Confirmation](#)

other



Further information

- Information on the packaging <https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage <https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...) <https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5217-1TC14>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5217-1TC14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5217-1TC14&lang=en

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5217-1TC14>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

Characteristic: Tripping characteristics, I²t, Let-through current



<https://support.industry.siemens.com/cs/ww/en/ps/3RW5217-1TC14/char>

Characteristic: Installation altitude

https://www.automation.siemens.com/bilddb/index.aspx?gridview=view2&objkey=G_NSBO_XX_01704&showdetail=true&view=Search

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

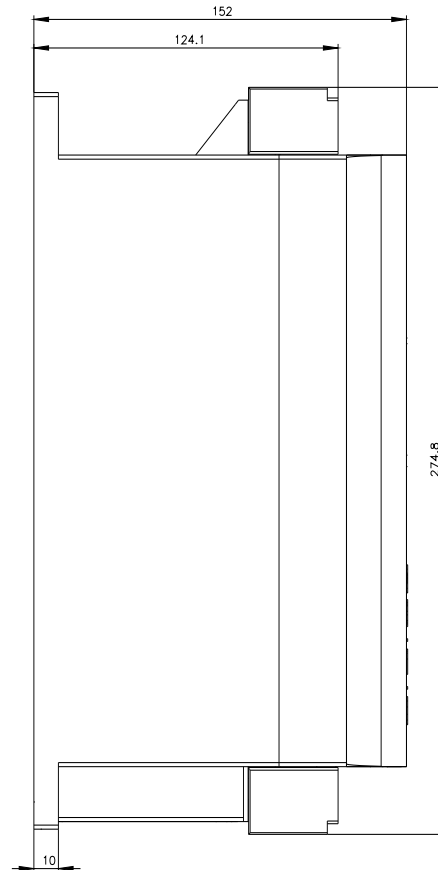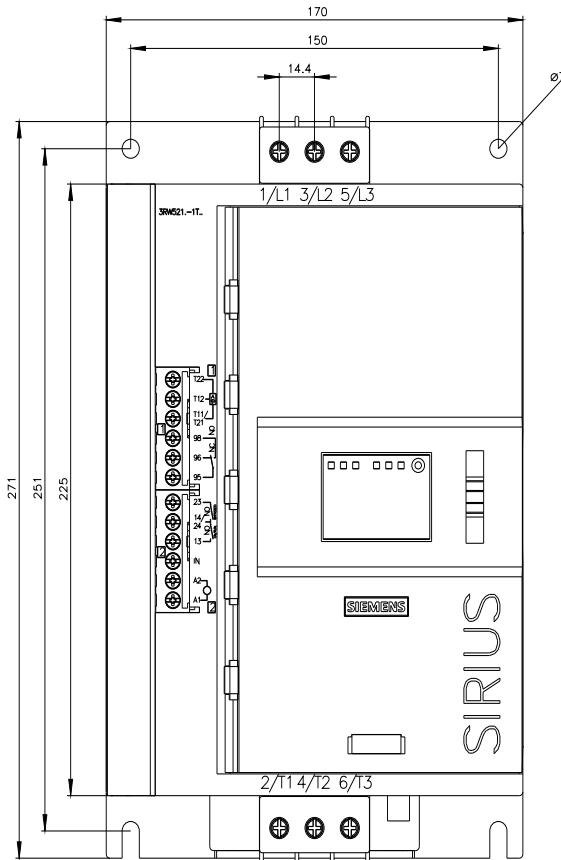



last modified:

4/4/2026 

