

phase-out type semiconductor relay, 3-phase 3RF2 55 A / 40 °C 48-600 V / 4-30 V DC 3-phase controlled spring-loaded terminal blocking voltage 1200 V for mounting on available cooling surfaces

product brand name	SIRIUS
product designation	solid-state relay
design of the product	3-pole controlled
product type designation	3RF22
manufacturer's article number	
<ul style="list-style-type: none"> _2 of the accessories that can be ordered 	3RF2900-0EA18
product designation	
<ul style="list-style-type: none"> _2 of the accessories that can be ordered 	converter
General technical data	
product function	zero-point switching
power loss [W] for rated value of the current	
<ul style="list-style-type: none"> at AC in hot operating state 	226 W
<ul style="list-style-type: none"> at AC in hot operating state per pole 	226 W
<ul style="list-style-type: none"> without load current share typical 	0.5 W
insulation voltage rated value	600 V
surge voltage resistance of main circuit rated value	6 kV
protection class IP	IP20
protection class IP on the front according to IEC 60529	IP20
shock resistance according to IEC 60068-2-27	15 g / 11 ms
vibration resistance according to IEC 60068-2-6	2 g
reference code according to IEC 81346-2	Q
Substance Prohibitance (day/month/year)	07/01/2006
SVHC substance name	Lead monoxide (lead oxide) CAS-No. 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 Melamine CAS-No. 108-78-1
Net Weight	0.133 kg
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
type of voltage of the operating voltage	AC
operating voltage	
<ul style="list-style-type: none"> at AC <ul style="list-style-type: none"> at 50 Hz rated value 	48 ... 600 V
<ul style="list-style-type: none"> at AC <ul style="list-style-type: none"> at 60 Hz rated value 	48 ... 600 V
operating frequency rated value	50 ... 60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC	
<ul style="list-style-type: none"> at 50 Hz 	40 ... 660 V
<ul style="list-style-type: none"> at 60 Hz 	40 ... 660 V
operational current rated value maximum	55 A
operational current	
<ul style="list-style-type: none"> at AC-1 at 400 V rated value 	55 A
<ul style="list-style-type: none"> at AC-51 rated value 	20 A
<ul style="list-style-type: none"> according to UL 508 rated value 	20 A
ampacity maximum	55 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	100 V/μs

blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
I²t value maximum	1 800 A ² ·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1 at DC	4 ... 30 V
control supply voltage at DC	
• initial value for signal <1> detection	4 V
• full-scale value for signal<0> recognition	1 V
control current at minimum control supply voltage	
• at DC	22 mA
control current at DC rated value	30 mA
ON-delay time	1 ms; additionally max. one half-wave
OFF-delay time	1 ms; additionally max. one half-wave
Installation/ mounting/ dimensions	
fastening method side-by-side mounting	Yes
fastening method	screw fixing
design of the thread of the screw for securing the equipment	M4
tightening torque of fixing screw maximum	1.5 N·m
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in
height	95 mm
width	45 mm
depth	47 mm
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	
• for main current circuit	spring-loaded terminals
• for auxiliary and control circuit	spring-loaded terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (0.5 ... 2.5 mm ²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm ²)
— finely stranded without core end processing	2x (0.5 ... 2.5 mm ²)
• for AWG cables for main contacts	2x (18 ... 14)
connectable conductor cross-section for main contacts	
• solid or stranded	0.5 ... 2.5 mm ²
• finely stranded with core end processing	0.5 ... 1.5 mm ²
• finely stranded without core end processing	0.5 ... 2.5 mm ²
type of connectable conductor cross-sections	
• for auxiliary and control contacts	
— solid	0.5 ... 1.5 mm ²
— finely stranded with core end processing	0.5 ... 2.5 mm ²
— finely stranded without core end processing	0.5 ... 2.5 mm ²
• for AWG cables for auxiliary and control contacts	1x (20 ... 12)
AWG number as coded connectable conductor cross section for main contacts	10 ... 14
tightening torque	
• for main contacts with screw-type terminals	2 ... 2.5 N·m
design of the thread of the connection screw	
• for main contacts	M4
stripped length of the cable	
• for main contacts	10 mm
• for auxiliary and control contacts	10 mm
UL/CSA ratings	
operational current according to UL 508 rated value	20 A

Electrical Safety

touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front

Ambient conditions

installation altitude at height above sea level maximum 1 000 m

ambient temperature

- during operation -25 ... +60 °C
- during storage -55 ... +80 °C

Electromagnetic compatibility

conducted interference

- due to burst according to IEC 61000-4-4 2 kV / 5 kHz, behavior criterion 2
- due to conductor-earth surge according to IEC 61000-4-5 2 kV, behavior criterion 2
- due to conductor-conductor surge according to IEC 61000-4-5 1 kV, behavior criterion 2
- due to high-frequency radiation according to IEC 61000-4-6 140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1

electrostatic discharge according to IEC 61000-4-2 4 kV contact discharging / 8 kV air discharging, behavior criterion 2

conducted HF interference emissions according to CISPR11 Class A for industrial environment

field-bound HF interference emission according to CISPR11 Class A for industrial environment

Short-circuit protection, design of the fuse link

manufacturer's article number

- of full range R fuse link for semiconductor protection at NH design usable [3NE1803-0: These fuses have a smaller rated current than the semiconductor relays](#)
- of back-up R fuse link for semiconductor protection at NH design usable [3NE8018-1](#)
- of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable [3NC1450: These fuses have a smaller rated current than the semiconductor relays](#)
- of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable [3NC2250: These fuses have a smaller rated current than the semiconductor relays](#)






manufacturer's article number of the gG fuse at NH design usable

- up to 460 V [3NA3807-6: These fuses have a smaller rated current than the semiconductor relays](#)
- up to 600 V [3NA3805-6: These fuses have a smaller rated current than the semiconductor relays](#)



Approvals Certificates

Environment **General Product Approval**

[Environmental Confirmations](#)








General Product Approval **EMV** **Test Certificates** **other**

[Type Test Certificates/Test Report](#) [Confirmation](#) [Miscellaneous](#) [Confirmation](#)

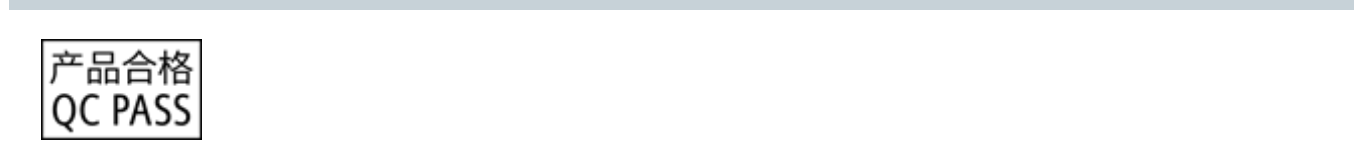other



Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2255-2AC45>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2255-2AC45>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2255-2AC45>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2255-2AC45&lang=en

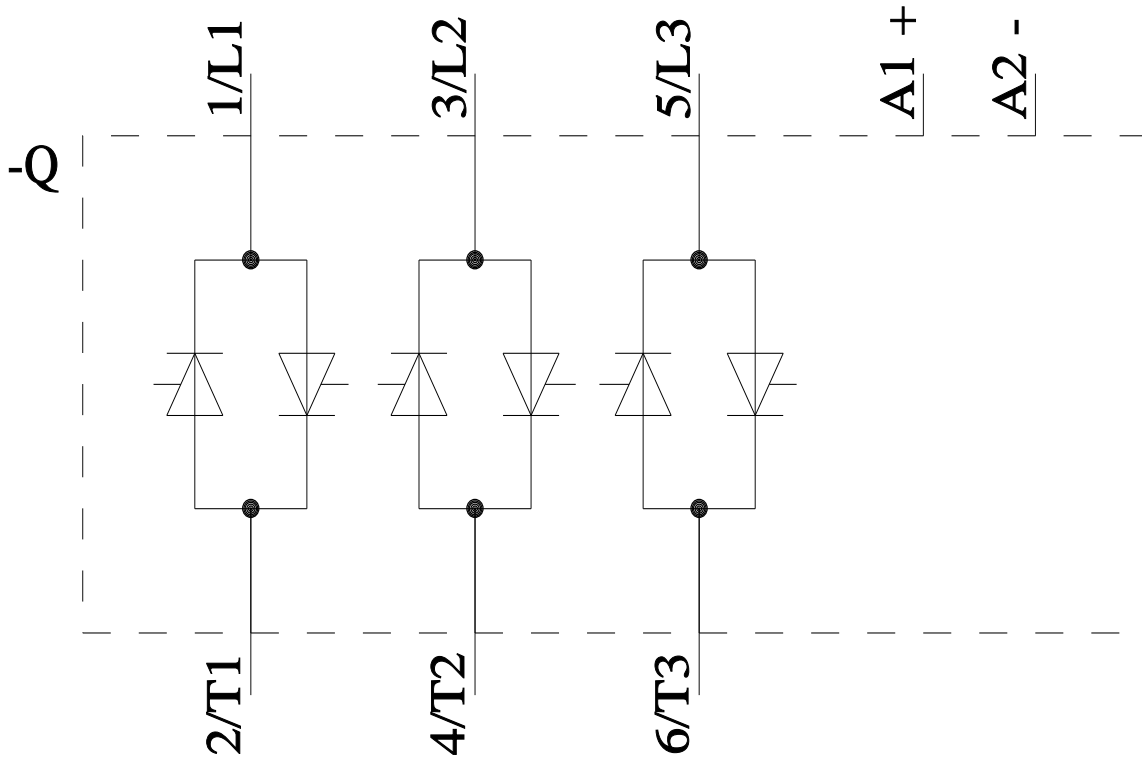

last modified:

4/4/2026 