









SITOR cylindrical fuse link, 14x51 mm, 10 A, aR, Un AC: 690 V, Un DC: 700 V, DC according to UL

Figure similar

Model					
product brand name	SETRON				
product designation	SITOR fuse link				
design of the product	DC acc. to UL				
General technical data					
operating class of the fuse link	aR				
type of voltage of the operating voltage	AC				
supply voltage at DC	700 V				
Dissipation					
power loss [W]	4 W				
power loss [W] for rated value of the current at AC in hot operating state per pole	4 W				
Main circuit					
operational current rated value	10 A				
Product details					
product component striker	No				
Mechanical Design					
mounting position	Any, preferably vertical				
Net Weight	21 g				
Approvals Certificates					
Environment	General Product Approval				
Environmental Confirmations		Environmental Confirmations			Confirmation
General Product Approval	other			Confirmation	

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NC1410>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NC1410>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC1410

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

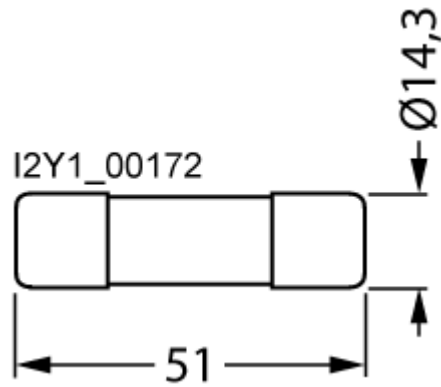

last modified:

11/14/2025

