



SITOR cylindrical fuse link, 22x127 mm, 4 A, gS, Un AC: 1500 V, Un DC: 1000 V

Figure similar

Model	
product brand name	SENTRON
product designation	SITOR fuse link
General technical data	
operating class of the fuse link	gS
type of voltage of the operating voltage	AC
supply voltage at DC	1 000 V
Main circuit	
operational current rated value	4 A
Product details	
product component striker	No
Mechanical Design	
mounting position	Any, preferably vertical
Net Weight	110 g
Approvals Certificates	
Environment	General Product Approval

[Environmental Confirmations](#)



[Environmental Confirmations](#)



[Confirmation](#)



General Product Approval

other



EG-Konf.

[Confirmation](#)



### Further information

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NC2304-0MK>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3NC2304-0MK>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NC2304-0MK](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC2304-0MK)

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

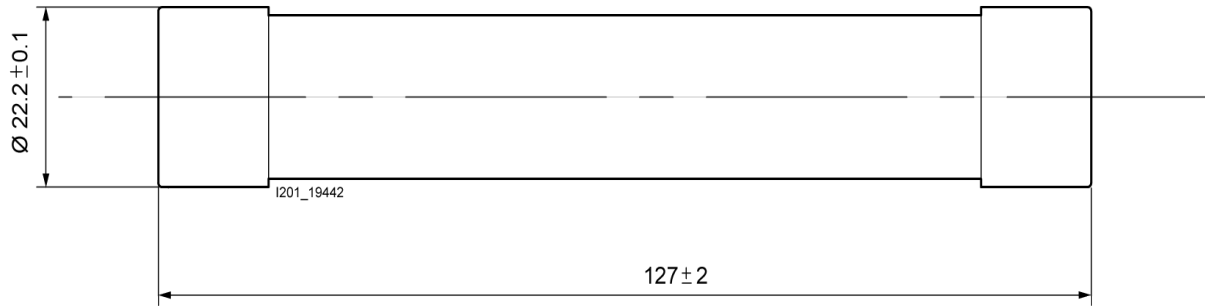

last modified:

11/14/2025 

