



miniature circuit breaker 400 V 6 kA, 4-pole, C, 0.5 A

| Model   |   |
|---|---|
| product brand name  | SENTRON   |
| product designation   | Miniature circuit breaker   |
| General technical data  |   |
| number of poles   | 4   |
| design of pole  | 4P  |
| tripping characteristic class   | C   |
| mechanical service life (operating cycles) typical                                  | 10 000  |
| overvoltage category  | 3   |
| degree of pollution   | 2   |
| Voltage   |   |
| type of voltage of the operating voltage  | AC  |
| type of voltage   | Use only in alternating current or direct current circuits. Mixed use is not permitted. |
| insulation voltage (U <sub>i</sub> )  |   |
| • with multi-phase operation at AC rated value                                      | 440 V   |
| • operational current   |   |
| — at 30 °C rated value  | 0.5 A   |
| — at 40 °C rated value  | 0.48 A  |
| — at 55 °C rated value  | 0.44 A  |
| • operational current at AC rated value   | 0.5 A   |
| Supply voltage  |   |
| supply voltage at AC  | 400 V   |
| value range of the supply voltage frequency   | 50/60 Hz  |
| operating voltage   |   |
| • with multi-phase operation at AC maximum  | 440 V   |
| Protection class  |   |
| protection class IP   | IP20, with connected conductors   |
| Breaking Capacity   |   |
| switching capacity current  |   |
| • according to EN 60898 rated value   | 6 kA  |
| • according to IEC 60947-2 rated value  | 6 kA  |
| energy limitation class   | 3   |
| Dissipation   |   |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 0.9 W   |
| suitability for operation   | Residential buildings/infrastructure  |
| Product details   |   |

|   |     |
|---|-----|
| product feature touch protection                    | Yes |
| product component neutral conductor switching       | No  |
| product feature halogen-free                        | Yes |
| product feature sealable                            | Yes |
| product feature silicon-free                        | Yes |
| product extension installable supplementary devices | Yes |

### Connections

|   |                      |
|---|----------------------|
| <b>connectable conductor cross-section solid</b>                                    |                      |
| • minimum   | 0.75 mm <sup>2</sup> |
| • maximum   | 25 mm <sup>2</sup>   |
| <b>connectable conductor cross-section stranded</b>                                 |                      |
| • minimum   | 0.75 mm <sup>2</sup> |
| • maximum   | 25 mm <sup>2</sup>   |
| <b>connectable conductor cross-section finely stranded with core end processing</b> |                      |
| • minimum   | 0.75 mm <sup>2</sup> |
| • maximum   | 25 mm <sup>2</sup>   |
| <b>tightening torque with screw-type terminals</b>                                  |                      |
| • minimum   | 2.5 N·m              |
| • maximum   | 3 N·m                |

### Mechanical Design

|                               |       |
|-------------------------------|-------|
| height                        | 90 mm |
| width                         | 72 mm |
| depth                         | 76 mm |
| installation depth            | 70 mm |
| number of modular width units | 4     |
| mounting position             | any   |
| Net Weight                    | 601 g |

### Environmental conditions

|   |        |
|---|--------|
| <b>ambient temperature during operation</b> |        |
| • minimum                                   | -25 °C |
| • maximum                                   | 45 °C  |
| <b>ambient temperature during storage</b>   |        |
| • minimum                                   | -40 °C |
| • maximum                                   | 75 °C  |

### Approvals Certificates

|             |                          |
|-------------|--------------------------|
| Environment | General Product Approval |
|-------------|--------------------------|

[Environmental Confirmations](#)

[Environmental Confirmations](#)



[Miscellaneous](#)



|                          |       |
|--------------------------|-------|
| General Product Approval | other |
|--------------------------|-------|

[Confirmation](#)



[Confirmation](#)



### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL6405-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SL6405-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SL6405-7](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL6405-7)

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

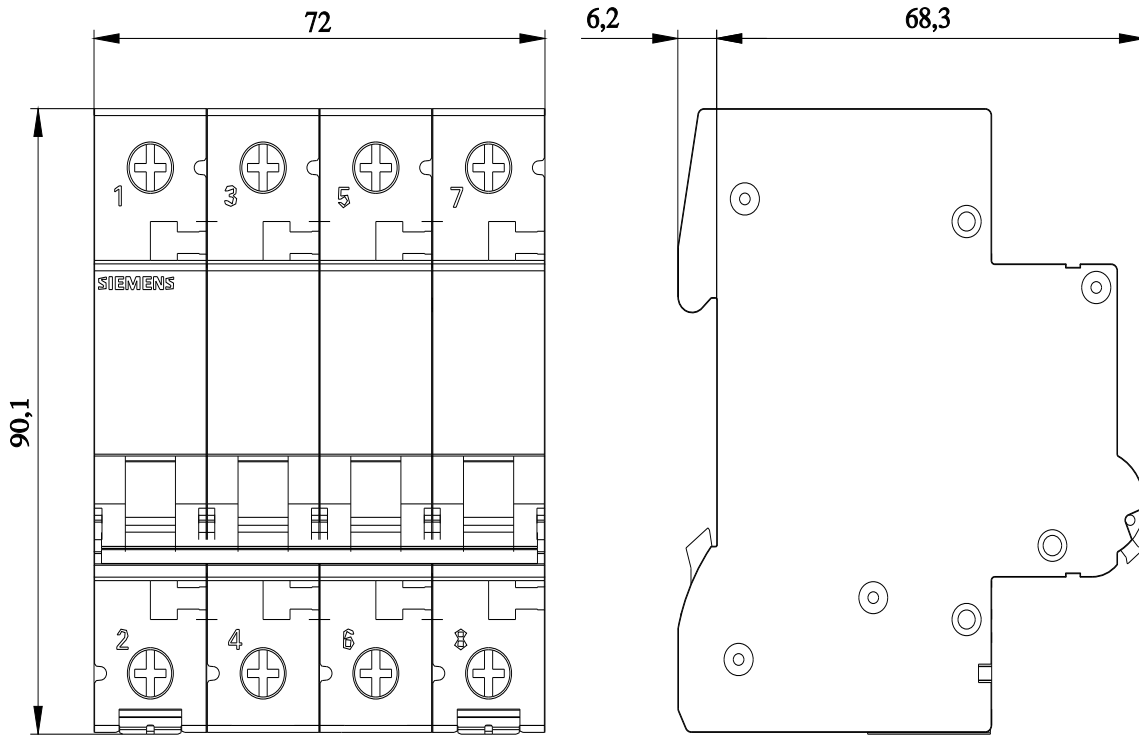



last modified:

10/10/2025 

