



Auxiliary switch, 1 NO+1 NC, with gold-plated contacts, accessory for main and emergency switching-off 3LD2 front mounting and for molded case switch 3LD5 UL front mounting

| Model | |
|-------------------------|---|
| product brand name | SETRON |
| product designation | auxiliary switch |
| design of the product | accessories for 3LD2 main and EMERGENCY-STOP switches, front mounting |
| operational current | <ul style="list-style-type: none"> at AC-15 at 110 V rated value: 6 A at AC-15 at 230 V rated value: 3 A at AC-15 at 500 V rated value: 1.4 A at DC-13 at 24 V rated value: 4 A |
| suitability for use | for 3LD2 front mounting and 3LD5 UL front mounting |
| special product feature | NO: lagging during switching ON, leading during switching OFF the 3LD switch. NC: leading during switching ON, lagging during switching OFF the 3LD switch |

| Accessories | |
|---|--|
| accessories | auxiliary switch, 1 NO + 1 NC, with gold-plated contacts |
| tightening torque with screw-type terminals | <ul style="list-style-type: none"> minimum: 0.8 N·m maximum: 1.2 N·m |
| type of connectable conductor cross-sections for auxiliary contacts | <ul style="list-style-type: none"> solid: 2x (0.75-2.5 mm²), 1x 4 mm² finely stranded with core end processing: 2x (0.75-2.5 mm²), 1x 4 mm² stranded: 2x (0.75-2.5 mm²), 1x 4 mm² |

| Mechanical Design | |
|-------------------|------|
| Net Weight | 21 g |

| Approvals Certificates | |
|------------------------|--------------------------|
| Environment | General Product Approval |

[Environmental Confirmations](#)

[Environmental Confirmations](#)



General Product Approval



[Miscellaneous](#)



[Confirmation](#)



[Confirmation](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9200-5BF>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3LD9200-5BF>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD9200-5BF

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

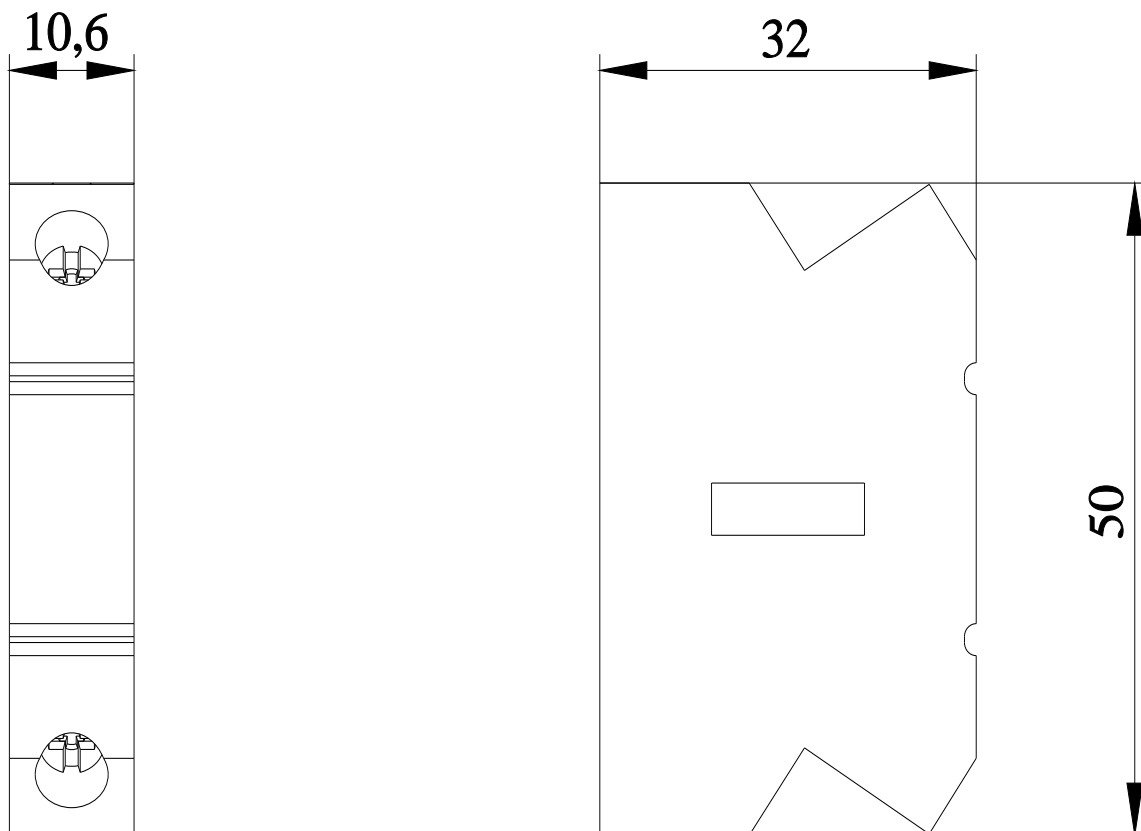

last modified:

4/12/2025

