



NEOZED fuse-link, D02, 25 A, gG, Un AC: 400 V, Un DC: 250 V, with tin-coated contact-caps

Model	
product brand name	SENTRON
product designation	NEOZED fuse link
design of the product	With tin-coated contact caps
product version	Pack of 10
design of the fuse link	NEOZED fuse link
General technical data	
size of fuse system according to EN 60269-1	D02
operating class of the fuse link	gG
Supply voltage	
supply voltage	
• at AC	400 V
• at DC	250 V
operating voltage rated value	400 V
protection class IP	IP20, with connected conductors
switching capacity current according to IEC 60947-2 rated value	50 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	1.7 W
Main circuit	
operational current rated value	25 A
Appearance	
color coding of the fuse link	Yellow
maximum short-circuit current breaking capacity (I <sub>cu</sub> ) at AC rated value	50 kA
Mechanical Design	
mounting position	Any, preferably vertical
Net Weight	13 g
ambient temperature during operation	
• minimum	-25 °C
• maximum	40 °C
environmental category	Up to 45°C at 95 % rel. humidity
Approvals Certificates	
Environment	General Product Approval

[Environmental Con-  
firmations](#)

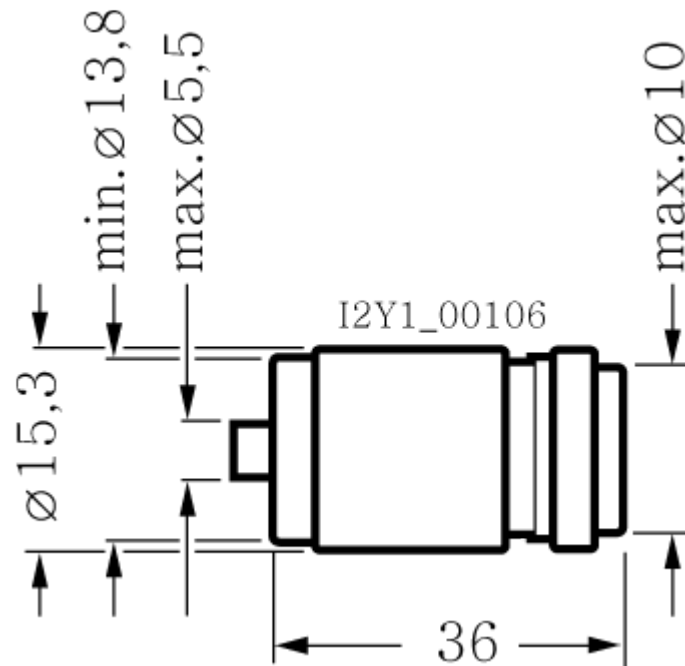
[Environmental Con-  
firmations](#)



[Confirmation](#)

[Confirmation](#)

#### Further information

**Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information for data generation and storage**<https://support.industry.siemens.com/cs/ww/en/view/109995012>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SE2325>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/5SE2325>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SE2325](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2325)**CAX-Online-Generator**<https://www.siemens.com/cax>**Tender specifications**<https://www.siemens.com/specifications>**Characteristic curves**[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

last modified:

4/10/2025

