



SENTRON, cylindrical fuse holder, 10 x 38 mm, 2-pole, In: 25 A, Ue DC: 1000 V, LED Signal detector, for photovoltaic application

Model	
product brand name	SENTRON
product designation	Cylindrical fuse holder
design of the product	LED signal detector, for photovoltaic applications
General technical data	
number of poles	2
size of fuse link	10 x 38 mm
operational current at DC rated value	30 A
Supply voltage	
operating voltage	1 000 V
• at DC rated value	
protection class IP	IP20
Mechanical Design	
height	85 mm
width	36 mm
depth	65 mm
Net Weight	103 g
Certificates	
reference code according to IEC 81346-2	F

Approvals Certificates	
Environment	General Product Approval

[Environmental Con-  
firmations](#)



[Confirmation](#)



General Product Ap- proval	other
-------------------------------	-------



[Miscellaneous](#)

[Confirmation](#)



### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information for data generation and storage  
<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NW7024-4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NW7024-4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NW7024-4](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW7024-4)

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

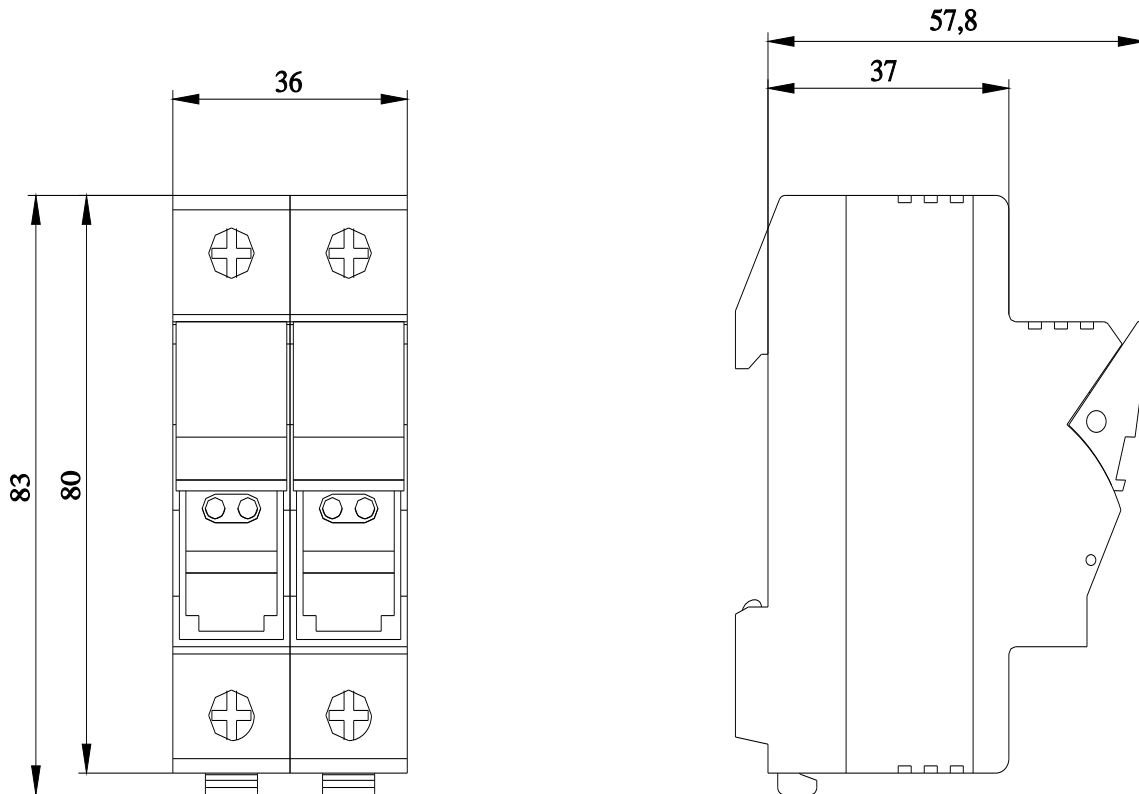

last modified:

4/11/2025

