



Figure similar

Terminal, screw terminal, through-type terminal, 2.5 mm<sup>2</sup>, red

Model	
product brand name	SETRON
product designation	Terminal blocks
design of the product	through-type terminal
design of terminal terminal levels internally linked	No
General technical data	
terminal contact spacing	5 mm
operating voltage rated value	1 000 V
Protection class	
combustibility class according to UL 94	V0
Main circuit	
operational current rated value	24 A
Appearance	
color	red
Product details	
product component required end cover plate	Yes
Number	
number of terminal levels	1
number of terminal points per terminal level	2
Connections	
connectable conductor cross-section solid	
• minimum	0.14 mm <sup>2</sup>
• maximum	4 mm <sup>2</sup>
connectable conductor cross-section stranded	
• minimum	1.5 mm <sup>2</sup>
• maximum	0.14 mm <sup>2</sup>
connectable conductor cross-section finely stranded	
• with core end processing minimum	0.14 mm <sup>2</sup>
• with core end processing maximum	2.5 mm <sup>2</sup>
• without core end processing minimum	0.14 mm <sup>2</sup>
• without core end processing maximum	4 mm <sup>2</sup>
tightening torque with screw-type terminals	
• minimum	0.6 N·m
• maximum	1 N·m
type of connection 1	screw-type terminal
type of connection 2	screw-type terminal
position of the terminal	lateral
Mechanical Design	

height	48 mm
height with lowest-profile installation	47.5 mm
depth	46.9 mm
length	48 mm
fastening method	TH35 DIN rail
Net Weight	8 g
material of the insulating body	PA

#### Environmental conditions

ambient temperature during operation	
<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>	<p>-60 °C</p> <p>105 °C</p>

#### Approvals Certificates

Environment	General Product Approval
-------------	--------------------------

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)



[Confirmation](#)

General Product Ap- proval	other
-------------------------------	-------



[Confirmation](#)



#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WH1000-0AF02>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WH1000-0AF02>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8WH1000-0AF02](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH1000-0AF02)

##### CAX-Online-Generator


<https://www.siemens.com/cax>

##### Tender specifications

<https://www.siemens.com/specifications>

##### Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

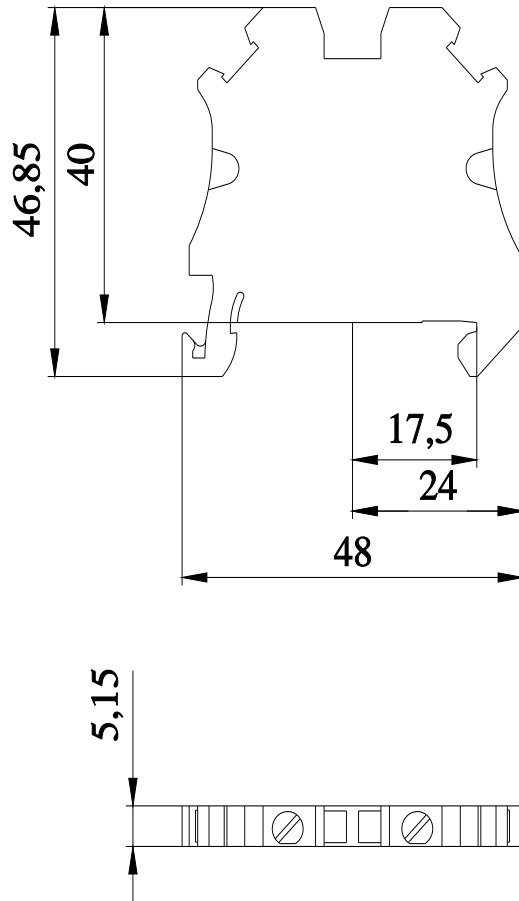

last modified:

5/26/2025 