


**product type designation**

product description

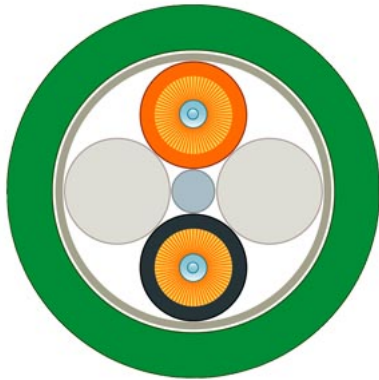

**PCF Standard Cable GP**

PCF fiber-optic cable with plastic cladding, preferred length, preassembled

PCF Standard Cable, pre-assembled with 2x2 BFOC plugs, insertion aid, length 150 m.

product brand name	SIMATIC NET
Technical Product Detail Page	<a href="https://l.siemens.com/1P6XV1861-3AT15">https://l.siemens.com/1P6XV1861-3AT15</a>
suitability for use	Cable for permanent installation indoors and outdoors, UL approval
version of the assembled FO cable	Assembled with four BFOC connectors
cable designation	AT-V(ZN)YY 2K 200/230
wire length	150 m
<b>optical data</b>	
attenuation factor per length	
• at 650 nm / maximum	10 dB/km
• at 660 nm / maximum	10 dB/km
bandwidth length product	
• at 650 nm	17 GHz·m
<b>mechanical data</b>	
number of fibers / per FOC core	1
number of FO cores / per FOC cable	2
version of the FO conductor fiber	Step index fiber 200/230 μm
outer diameter	
• of the optical fibers	200 μm
• of the optical fiber sheath	230 μm
• of the FOC core sheath	2.2 mm
symmetrical deviation / of the outer diameter of the FOC core sheath	0.1 mm
outer diameter / of the cable	7.2 mm
symmetrical deviation / of the outer diameter of the line	0.5 mm
material	
• of the fiber-optic cable core	Quartz glass
• of the optical fiber sheath	Special polymer
• of the FOC core sheath	PVC
• of the fiber-optic cable sheath	PVC
• of the strain relief	Aramid fibers
color	
• of the FOC core sheath	orange/black
• of cable sheath	green
bending radius	
• with single bend / minimum permissible	70 mm
• with multiple bends / minimum permissible	105 mm
tensile load	

<ul style="list-style-type: none"> <li>• during installation / short-term</li> </ul>	800 N
<ul style="list-style-type: none"> <li>• during operation / maximum</li> </ul>	100 N
short-term shear force per length	500 N/cm
continuous shear force per length	300 N/cm
weight per length	45 kg/km
<b>ambient conditions</b>	
ambient temperature	
<ul style="list-style-type: none"> <li>• during operation</li> </ul>	-40 ... +85 °C
<ul style="list-style-type: none"> <li>• during storage</li> </ul>	-25 ... +75 °C
<ul style="list-style-type: none"> <li>• during transport</li> </ul>	-25 ... +75 °C
<ul style="list-style-type: none"> <li>• during installation</li> </ul>	-5 ... +50 °C
fire behavior	flame-resistant acc. to IEC 60332-1-2 and IEC 60332-3-22 (Cat. A)
chemical resistance	
<ul style="list-style-type: none"> <li>• to mineral oil</li> </ul>	conditional resistance
<ul style="list-style-type: none"> <li>• to grease</li> </ul>	conditional resistance
radiological resistance / to UV radiation	resistant
protection class IP	IP20
<b>product features, product functions, product components / general</b>	
product feature	
<ul style="list-style-type: none"> <li>• halogen-free</li> </ul>	No
<ul style="list-style-type: none"> <li>• silicon-free</li> </ul>	Yes
product component / rodent protection	No
wire length	
<ul style="list-style-type: none"> <li>• for PCF FOC / for Industrial Ethernet / maximum</li> </ul>	100 m
<ul style="list-style-type: none"> <li>• for PCF FOC / with PROFIBUS / maximum</li> </ul>	400 m
<b>standards, specifications, approvals</b>	
certificate of suitability	
<ul style="list-style-type: none"> <li>• UL approval</li> </ul>	Yes; c(UL)us OFN FT4
<ul style="list-style-type: none"> <li>• RoHS conformity</li> </ul>	Yes
<b>further information / internet links</b>	
internet link	
<ul style="list-style-type: none"> <li>• to website: Selection guide for cables and connectors</li> </ul>	<a href="https://support.industry.siemens.com/cs/ww/en/view/109766358">https://support.industry.siemens.com/cs/ww/en/view/109766358</a>
<ul style="list-style-type: none"> <li>• to web page: selection aid TIA Selection Tool</li> </ul>	<a href="https://www.siemens.com/tstcloud">https://www.siemens.com/tstcloud</a>
<ul style="list-style-type: none"> <li>• to website: Industrial communication</li> </ul>	<a href="https://www.siemens.com/simatic-net">https://www.siemens.com/simatic-net</a>
<ul style="list-style-type: none"> <li>• to web page: SiePortal</li> </ul>	<a href="https://sieportal.siemens.com/">https://sieportal.siemens.com/</a>
<ul style="list-style-type: none"> <li>• to website: Image database</li> </ul>	<a href="https://www.automation.siemens.com/bilddb">https://www.automation.siemens.com/bilddb</a>
<ul style="list-style-type: none"> <li>• to website: CAx-Download-Manager</li> </ul>	<a href="https://www.siemens.com/cax">https://www.siemens.com/cax</a>
<ul style="list-style-type: none"> <li>• to website: Industry Online Support</li> </ul>	<a href="https://support.industry.siemens.com">https://support.industry.siemens.com</a>
<b>security information / header</b>	
security information	<p>Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement - and continuously maintain - a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit <a href="http://www.siemens.com/cybersecurity-industry">www.siemens.com/cybersecurity-industry</a>. Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under <a href="https://www.siemens.com/cert">https://www.siemens.com/cert</a>. (V4.7)</p>
<b>Approvals / Certificates</b>	
<b>General Product Approval</b>	



[Declaration of Con-  
formity](#)



[Manufacturer Declara-  
tion](#)

[China RoHS](#)

General Product Ap-  
proval

other



[Confirmation](#)

last modified:

3/10/2026