


product type designation

product description

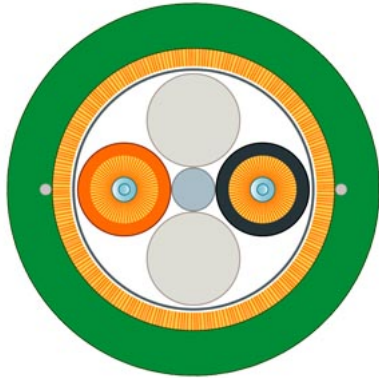

PCF Trailing Cable

PCF fiber-optic cable with plastic cladding, preferred length, preassembled

PCF Trailing Cable, pre-assembled with 2x2 BFOC plugs, insertion aid, length 75 m.

product brand name	SIMATIC NET
Technical Product Detail Page	https://l.siemens.com/1P6XV1861-3CN75
suitability for use	Cable for applications with high mechanical loading, and motion (e.g. trailing cables), no UL approval
version of the assembled FO cable	Assembled with four BFOC connectors
cable designation	AT-V(ZN)Y(ZN)11Y 2K 200/230
wire length	75 m
optical data	
attenuation factor per length	
• at 650 nm / maximum	10 dB/km
• at 660 nm / maximum	10 dB/km
bandwidth length product	
• at 650 nm	17 GHz·m
mechanical data	
number of fibers / per FOC core	1
number of FO cores / per FOC cable	2
version of the FO conductor fiber	Step index fiber 200/230 µm
outer diameter	
• of the optical fibers	200 µm
• of the optical fiber sheath	230 µm
• of the FOC core sheath	2.2 mm
symmetrical deviation / of the outer diameter of the FOC core sheath	0.1 mm
outer diameter / of the cable	8.8 mm
symmetrical deviation / of the outer diameter of the line	0.5 mm
material	
• of the fiber-optic cable core	Quartz glass
• of the optical fiber sheath	Special polymer
• of the FOC core sheath	PVC
• of the fiber-optic cable sheath	PUR
• of the strain relief	Aramid fibers
color	
• of the FOC core sheath	orange/black
• of cable sheath	green
bending radius	
• with single bend / minimum permissible	130 mm
• with multiple bends / minimum permissible	175 mm
number of bending cycles	5000000

tensile load	
• during installation / short-term	2000 N
• during operation / maximum	800 N
short-term shear force per length	500 N/cm
continuous shear force per length	300 N/cm
weight per length	85 kg/km
ambient conditions	
ambient temperature	
• during operation	-25 ... +75 °C
• during storage	-30 ... +75 °C
• during transport	-30 ... +75 °C
• during installation	-5 ... +50 °C
fire behavior	flame-retardant
chemical resistance	
• to mineral oil	resistant
• to grease	resistant
radiological resistance / to UV radiation	resistant
protection class IP	IP20
product features, product functions, product components / general	
product feature	
• halogen-free	No
• silicon-free	Yes
product component / rodent protection	No
wire length	
• for PCF FOC / for Industrial Ethernet / maximum	100 m
• for PCF FOC / with PROFIBUS / maximum	400 m
standards, specifications, approvals	
certificate of suitability	
• RoHS conformity	Yes
further information / internet links	
internet link	
• to website: Selection guide for cables and connectors	https://support.industry.siemens.com/cs/ww/en/view/109766358
• to web page: selection aid TIA Selection Tool	https://www.siemens.com/tstcloud
• to website: Industrial communication	https://www.siemens.com/simatic-net
• to web page: SiePortal	https://sieportal.siemens.com/
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: CAx-Download-Manager	https://www.siemens.com/cax
• to website: Industry Online Support	https://support.industry.siemens.com
security information / header	
security information	Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement - and continuously maintain - a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry . Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under https://www.siemens.com/cert . (V4.7)
Approvals / Certificates	
General Product Approval	



[Declaration of Con-
formity](#)



[Manufacturer Declara-
tion](#)

[China RoHS](#)

General Product Ap-
proval

other



[Confirmation](#)

last modified:

3/10/2026