



device adapter for SIRIUS circuit breaker size S3, IEC 100A/690 V, UL 100A/600 V, AWG4, 25 mm², length 200 mm, width 72 mm cable outlet at top cable max. 150° welded on length 153 mm, for busbar thicknesses 5 mm and 10 mm, TT profile

Model	
product brand name	SENTRON
product designation	Device adapter
design of the product	Accessories
Connections	
type of electrical connection	AWG 4
Mechanical Design	
height	200 mm
width of the adapter	72 mm
depth	55 mm
thickness of the busbar	
• minimum	5 mm
busbar center-to-center spacing	60 mm
Net Weight	646 g

Approvals Certificates	
Environment	General Product Approval

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



General Product Approval	Test Certificates
--------------------------	-------------------

[Confirmation](#)



[Special Test Certific-
ate](#)

[Miscellaneous](#)

[Type Test Certific-
ates/Test Report](#)

Maritime application



other



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1211-4TR00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1211-4TR00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1211-4TR00

CAx-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

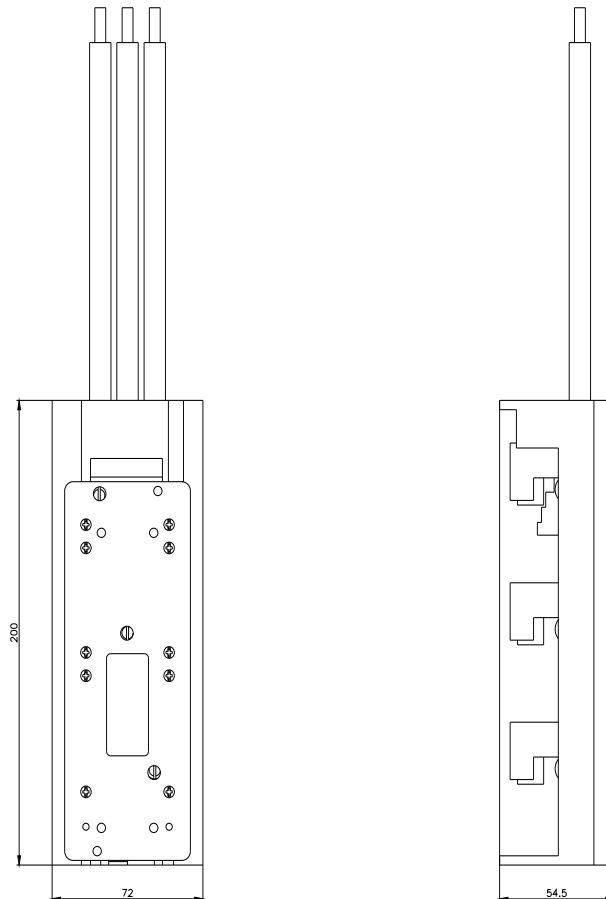

last modified:

12/4/2025

