



device adapter S00, 25 A, for 60 mm busbar system, 45x 200 mm long, special lines welded-on, AWG 12, 165 mm long spacer enclosed with product mounting rail screwed on

Model	
product brand name	SETRON
product designation	Device adapter
design of the product	Accessories
number of mounting rails	1
Connections	
type of electrical connection	AWG 12
Mechanical Design	
height	200 mm
width of the adapter	45 mm
depth	63 mm
thickness of the busbar	
• minimum	5 mm
• maximum	10 mm
busbar center-to-center spacing	60 mm
Net Weight	319 g
Approvals Certificates	
Environment	General Product Approval

[Environmental Confirmations](#)

[Environmental Confirmations](#)



[Confirmation](#)

General Product Approval	Test Certificates	Maritime application
	<p>Special Test Certificate</p> <p>Miscellaneous</p>	

Maritime application	other
	<p>Confirmation</p>

other	Railway
-------	---------

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1251-5DS11>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1251-5DS11>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1251-5DS11

CAx-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

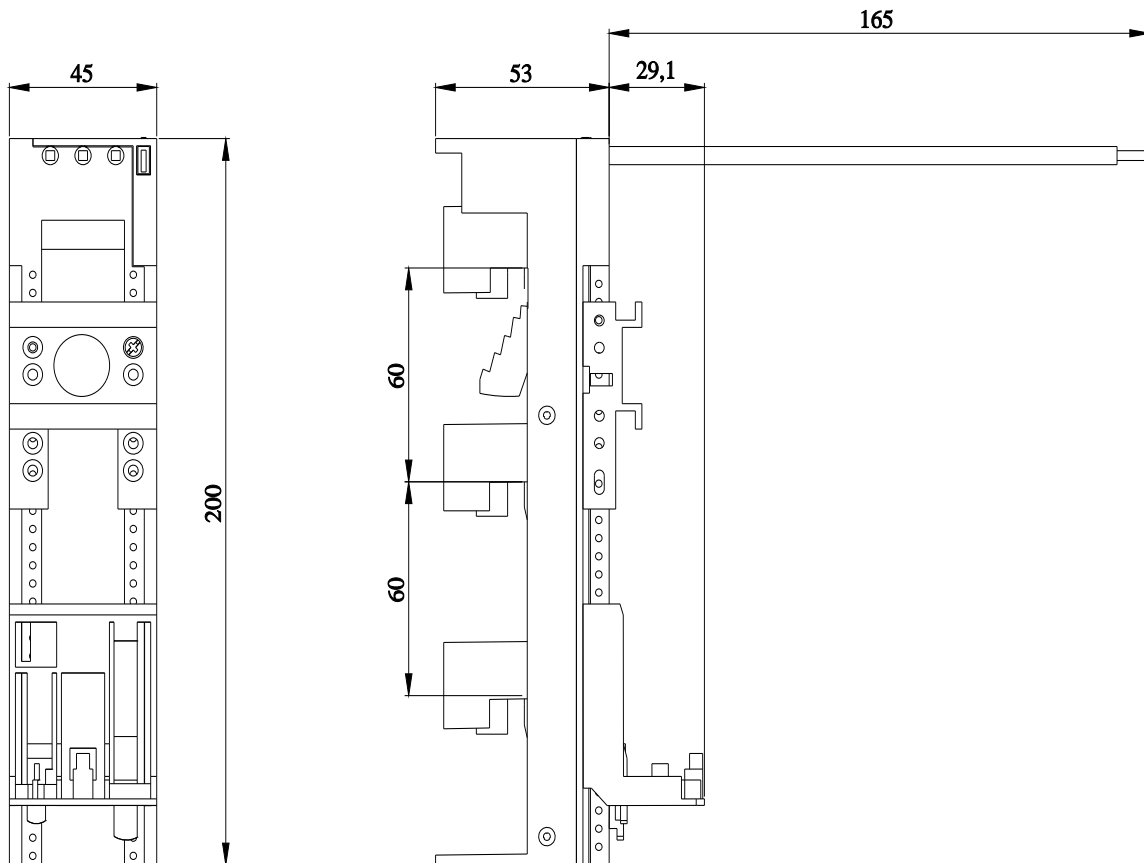

last modified:

4/8/2025 

