



busbar system busbar center-to-center spacing 60 mm device adapter, width: 55 mm busbar thickness: 5.10 mm+TT profile for circuit breaker with contactor 3R, S2 with 1 mounting rail 35 mm, up to 56 A length 242 mm

Model	
product brand name	SENTRON
product designation	Device adapter
design of the product	Accessories
number of mounting rails	1
Mechanical Design	
height	200 mm
width of the adapter	63 mm
depth	63 mm
thickness of the busbar	
• minimum	5 mm
• maximum	10 mm
busbar center-to-center spacing	60 mm
Net Weight	286 g

Approvals Certificates	
Environment	General Product Approval

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



[Confirmation](#)



General Product Ap- proval	Test Certificates	Maritime application	other
-------------------------------	-------------------	----------------------	-------



[Miscellaneous](#)



[Confirmation](#)



[Miscellaneous](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=8US1261-5FP08>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/8US1261-5FP08>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1261-5FP08

CAx-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

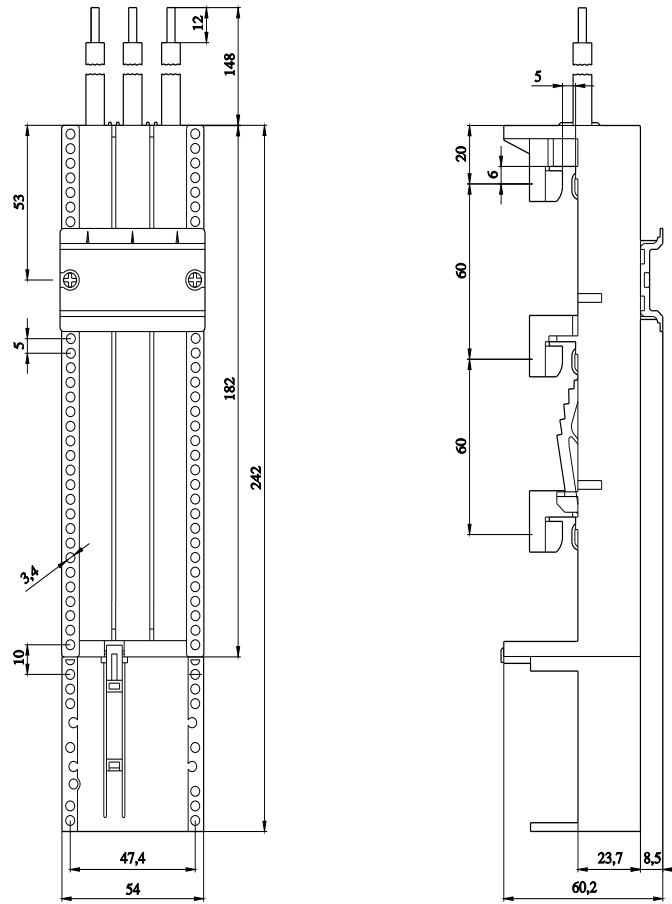

last modified:

4/11/2025 

