

busbar system, accessory busbar center-to-center spacing 40 mm busbar support 5-pole 12x 5, 15x 5 as end and intermediate holder



Model	
product brand name	SENTRON
product designation	Busbar support
operating voltage at AC rated value	690 V
type of connectable conductor cross-sections for copper conductor stranded	12 mm - 15 mm x 5 mm

Mechanical Design	
busbar center-to-center spacing	40 mm
Net Weight	123.5 g

Approvals Certificates	
Environment	General Product Approval

[Environmental Confirmations](#)

[Environmental Confirmations](#)



[Confirmation](#)

General Product Approval	Test Certificates	other
--------------------------	-------------------	-------



[Miscellaneous](#)

[Confirmation](#)



[Miscellaneous](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1903-5AA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1903-5AA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8US1903-5AA00](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1903-5AA00)

CAx-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP=HAUPT></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=HAUPT></mmp_prod_no>)

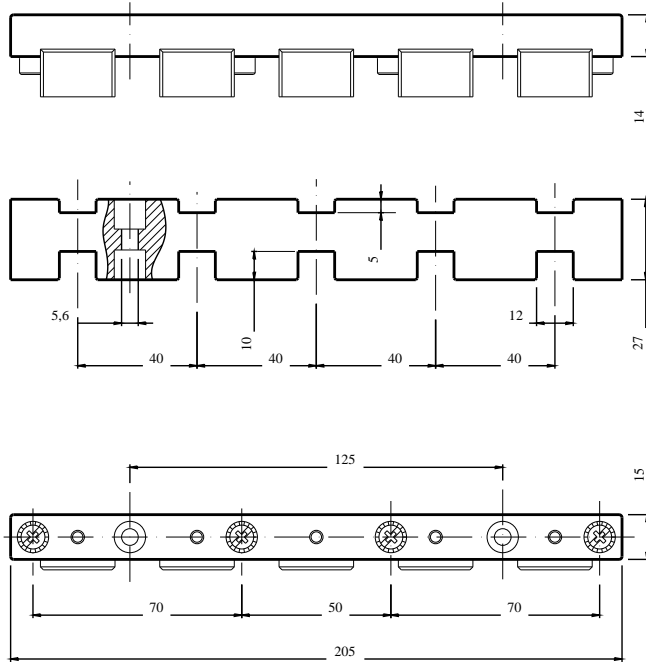

last modified:

6/1/2026 

