



busbar system, accessory busbar center-to-center spacing 60 mm busbar support 3-pole for busbars 12x 5 (10)-30x 5 -10 external fixing width: 20 mm

Model	
product brand name	SETRON
product designation	Busbar support
operating voltage at AC rated value	690 V
suitability for use	Flat bars
type of connectable conductor cross-sections for copper conductor stranded	12 mm x 5 mm - 30 mm x 10 mm

Mechanical Design	
width	20 mm
busbar center-to-center spacing	60 mm
Net Weight	153 g

Approvals Certificates	
Environment	General Product Approval

[Environmental Conformations](#)

[Environmental Conformations](#)



[Confirmation](#)

General Product Approval	Test Certificates	other
--------------------------	-------------------	-------



[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1923-2AA01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1923-2AA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1923-2AA01

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

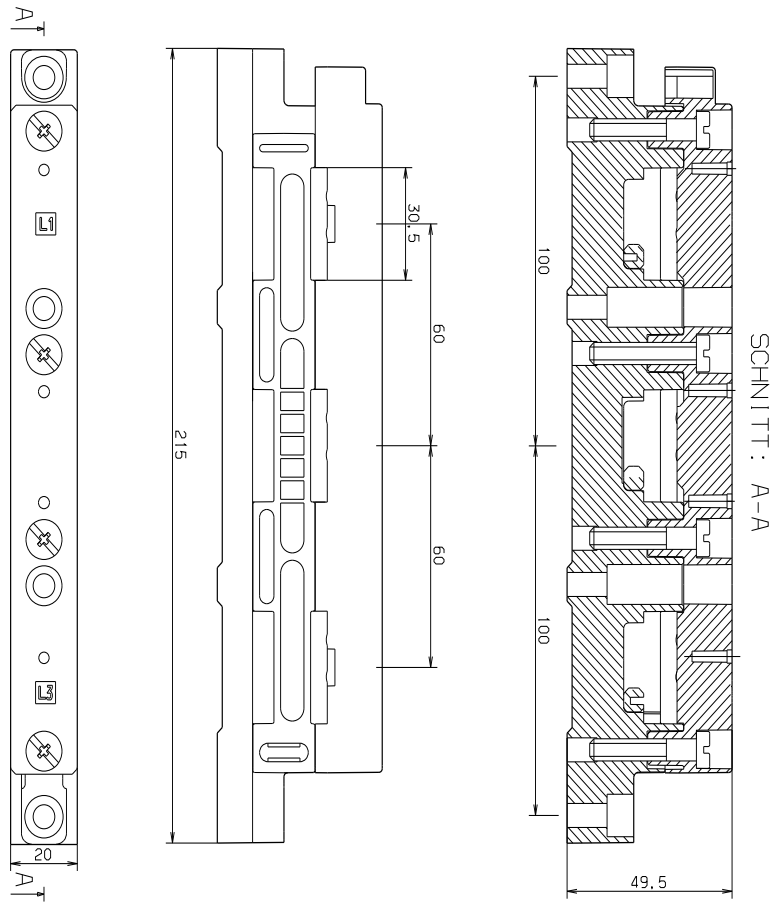

last modified:

6/1/2026

