


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	03/06/18	JLABOY
B	ECN 10454: UPDATE B PLUG VIEW	03/31/2020	DGUTTADAURO

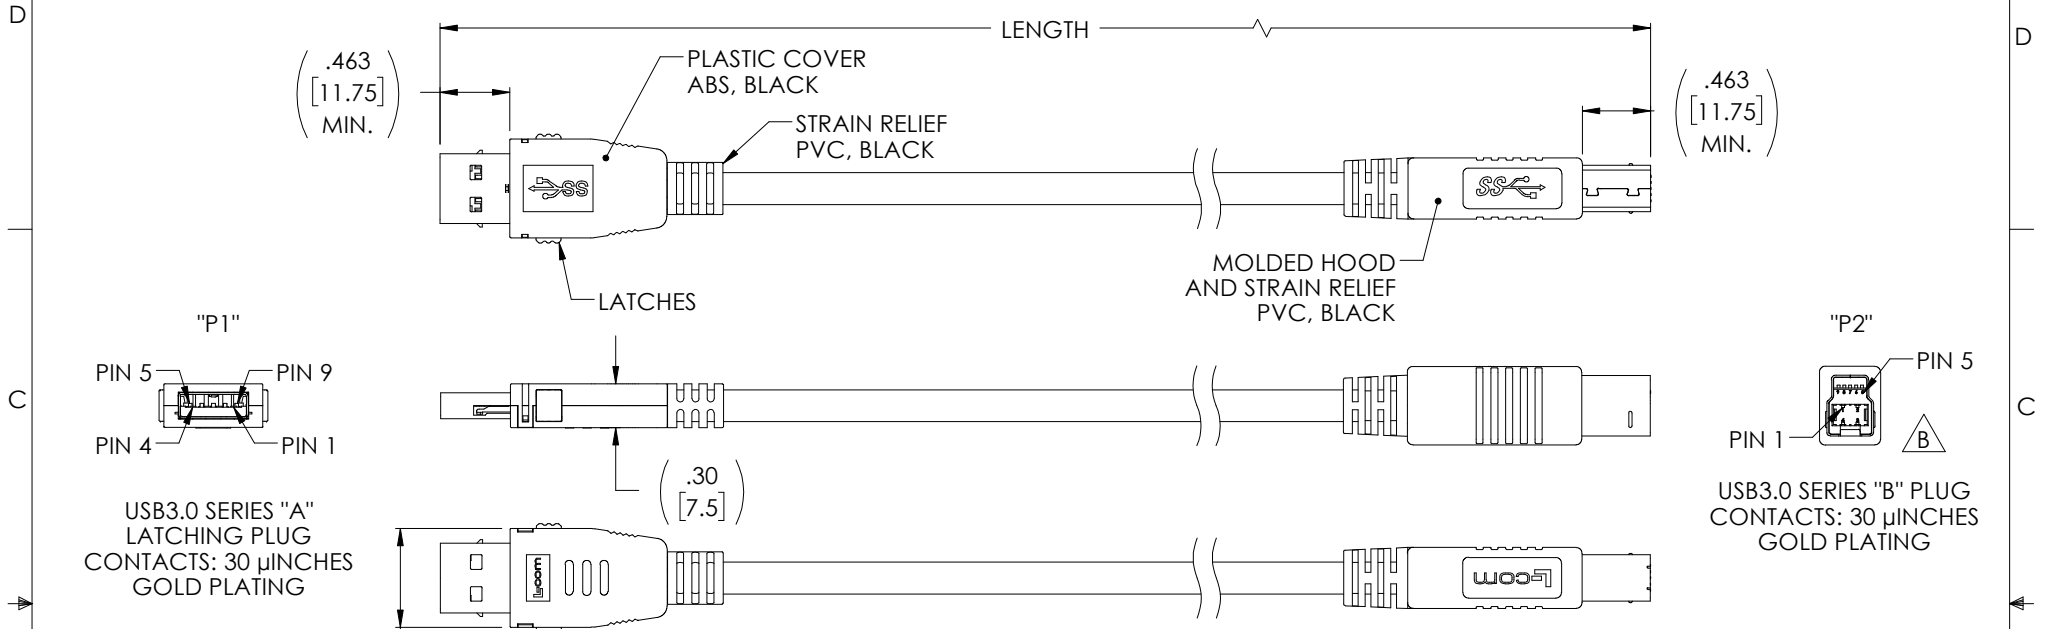

USB3.0 SERIES "A" LATCHING PLUG CONTACTS: 30 μINCHES GOLD PLATING

USB3.0 SERIES "B" PLUG CONTACTS: 30 μINCHES GOLD PLATING

PART NUMBER	LENGTH METERS [FEET]
U3A00006-03M	0.3 [.98]
U3A00006-05M	0.5 [1.64]
U3A00006-075M	0.75 [2.46]
U3A00006-1M	1.0 [3.28]
U3A00006-105M	1.5 [4.92]

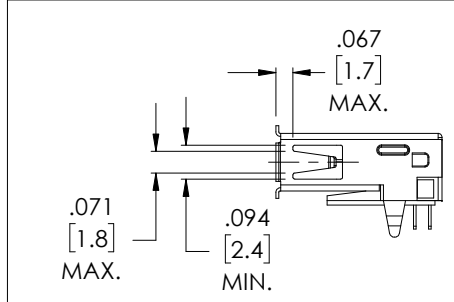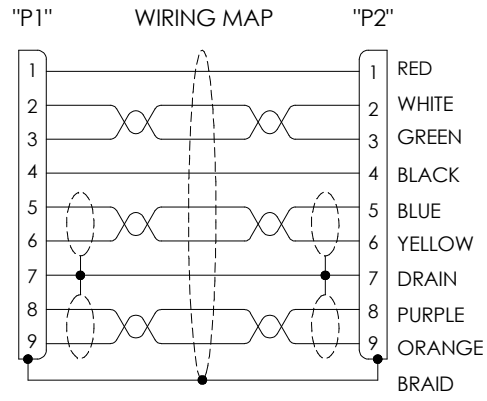

RECOMMENDED SIDE NOTCH SIZE FOR MATING A FEMALE CONNECTOR

CABLE:
 UL STYLE 20276, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65% JACKET: PVC, BLUE (PANTONE 300C) (NOM DIA. .217"[5.5], TEMPERATURE RANGE:-10~+80 °C)

- NOTES:**
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XXX = ± .005 [13] ANGLES ± 1° THIRD-ANGLE PROJECTION 	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY S.LJ	06/27/17	
	CHECKED BY B.ZHANG	06/27/17	
	APPROVED BY S.PAN	06/27/17	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY		USB
COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION		CA,USB3.0 A LATCH/B
SIZE A	CAGE CODE 43321	DWG. NO. U3A00006	REV. B
SCALE: NONE		CAD FILE: U3A00006.SLDDRW	SHEET 1 OF 1