

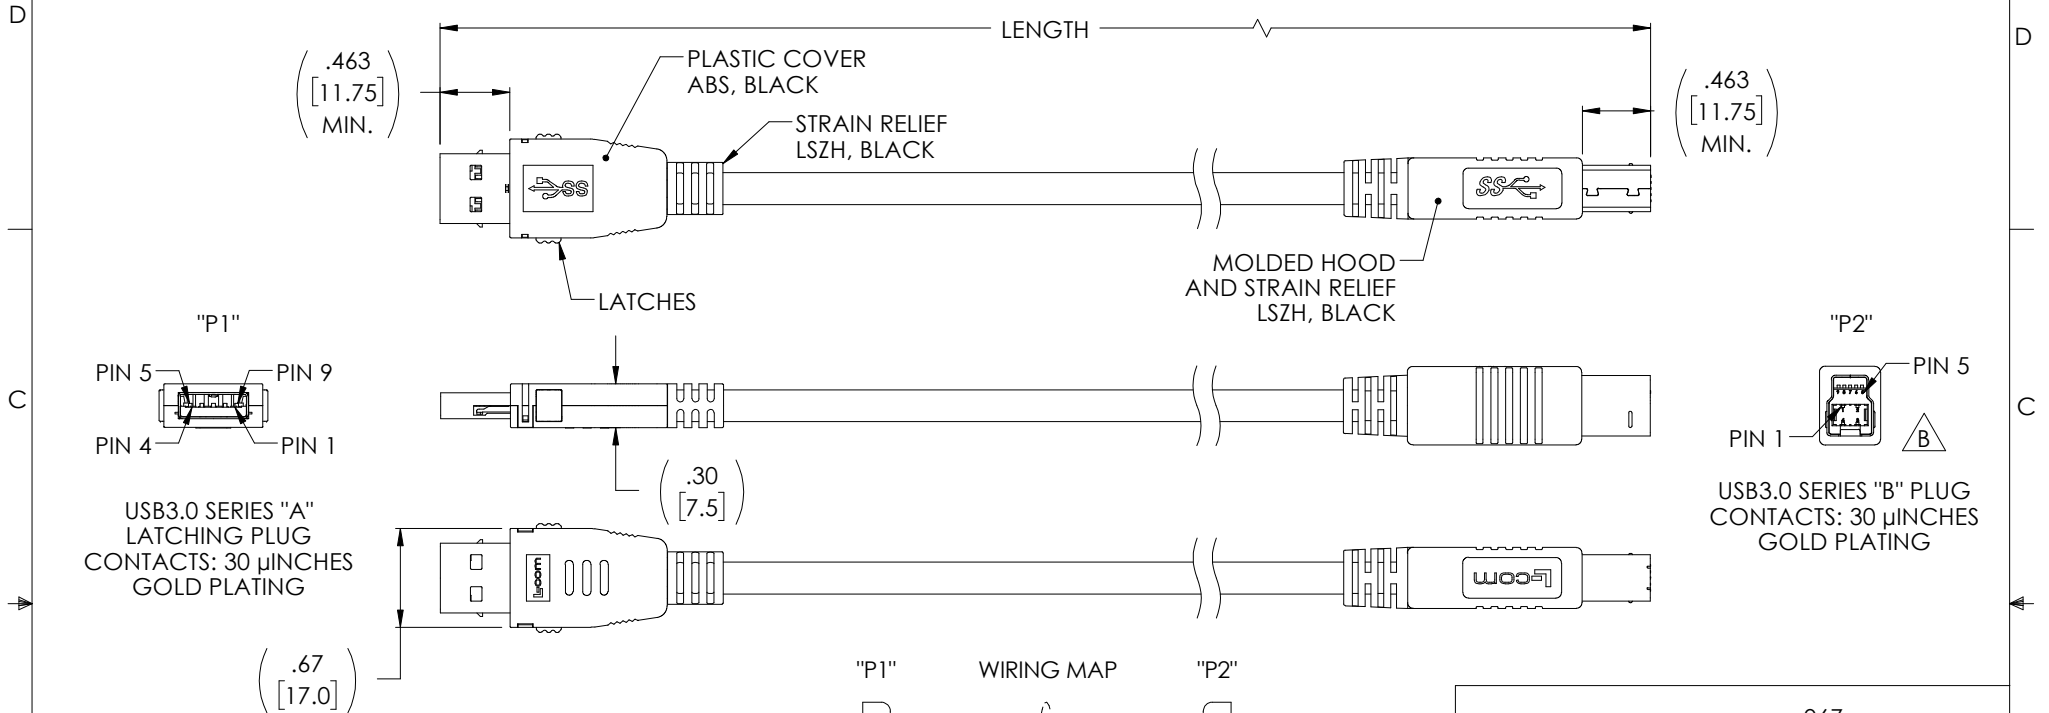


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	03/06/18	JLABOY
B	ECN 10454: UPDATE B PLUG VIEW	03/31/2020	DGUTTADAURO

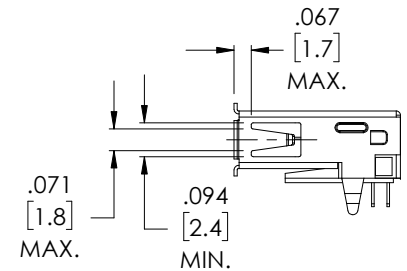

PART NUMBER	LENGTH METERS [FEET]
U3A00029-03M	0.3 [.98]
U3A00029-05M	0.5 [1.64]
U3A00029-075M	0.75 [2.46]
U3A00029-1M	1.0 [3.28]
U3A00029-105M	1.5 [4.92]

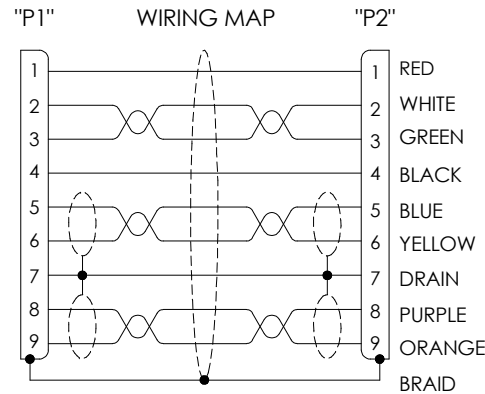


RECOMMENDED SIDE NOTCH SIZE FOR MATING A FEMALE CONNECTOR

CABLE:
UL STYLE 21551, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65% JACKET: LSZH, BLACK (NOM DIA. .217"[5.5], TEMPERATURE RANGE:-10~+80 °C)

NOTES:
1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITI® brand		50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY S.LI		06/27/17		CATEGORY		USB	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°		CHECKED BY B.ZHANG		06/27/17		PRODUCT DESCRIPTION		CA,USB3.0 A LATCH/B LSZH	
THIRD-ANGLE PROJECTION 		APPROVED BY S.PAN		06/27/17		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		COLOR VARIATIONS MAY OCCUR	
SIZE A		CAGE CODE 43321		DWG. NO. U3A00029		REV. B			
SCALE: NONE		CAD FILE: U3A00029.SLDDRW		SHEET 1 OF 1					