

INTERCHANGEABLE WALL PLUG POWER SUPPLY 5VDC 20WATT

POWERPAX SW4127I



Features:

- Interchangeable AC Heads
- 1 Year Warranty
- Level VI Efficiency
- Worldwide Approvals
- Safety approved to: UL62368-1, EN62368-1, UKCA62368-1 (Pending)



Description:

Our range of 20 Watt Interchangeable wall plug power supplies provide 20 Watts of continuous power with the flexibility of worldwide usage as they are supplied with UK, Euro, USA & Auz AC Heads , all Efficiency Level VI and carry worldwide safety approvals.

Specification	
Part Number	SW4127I
Input Voltage Range	90-264 Vac
Input Frequency Range	47-63Hz
Input Current Rated	0.58A Max
Input AC Heads	UK, Euro, USA & Auz
Output Voltage Rating	5V
Output Current Range	4A
Output Min Current	0A
Output Connection Type	2.1x5.5x12mm-Right angle
Total Output Regulation	+/- 5%
Line and Load Regulation	+/- 5%
Ripple & Noise	100mVp-p
Efficiency	75.18%Min
Over Voltage Protection	12V Max.
Over Load Protection	8A
Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to +80°C
Operating Humidity	10% to 90%
Storage Humidity	10% to 90%
Hi-Pot	3000Vac 10mA 1min
Leakage Current	0.25mA max
Safety Standard	UL,CUL,EN,PSE,BSMI,RCM,(UKCA pending)
EMI Standard	FCC/CE Class B
MTBF	30K Hours
Size mm max.	75 (L) x 35 (W) x 65 (H)
Weight	170g

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


POWERPAX

TT Electronics IoT Solutions Ltd
Tofts Farm East, Brenda Road, Hartlepool, TS25 2BQ, UK
t: +44 (0) 1429 852 500

INTERCHANGEABLE WALL PLUG POWER SUPPLY 5VDC 20WATT

POWERPAX SW4127I

Diagrams

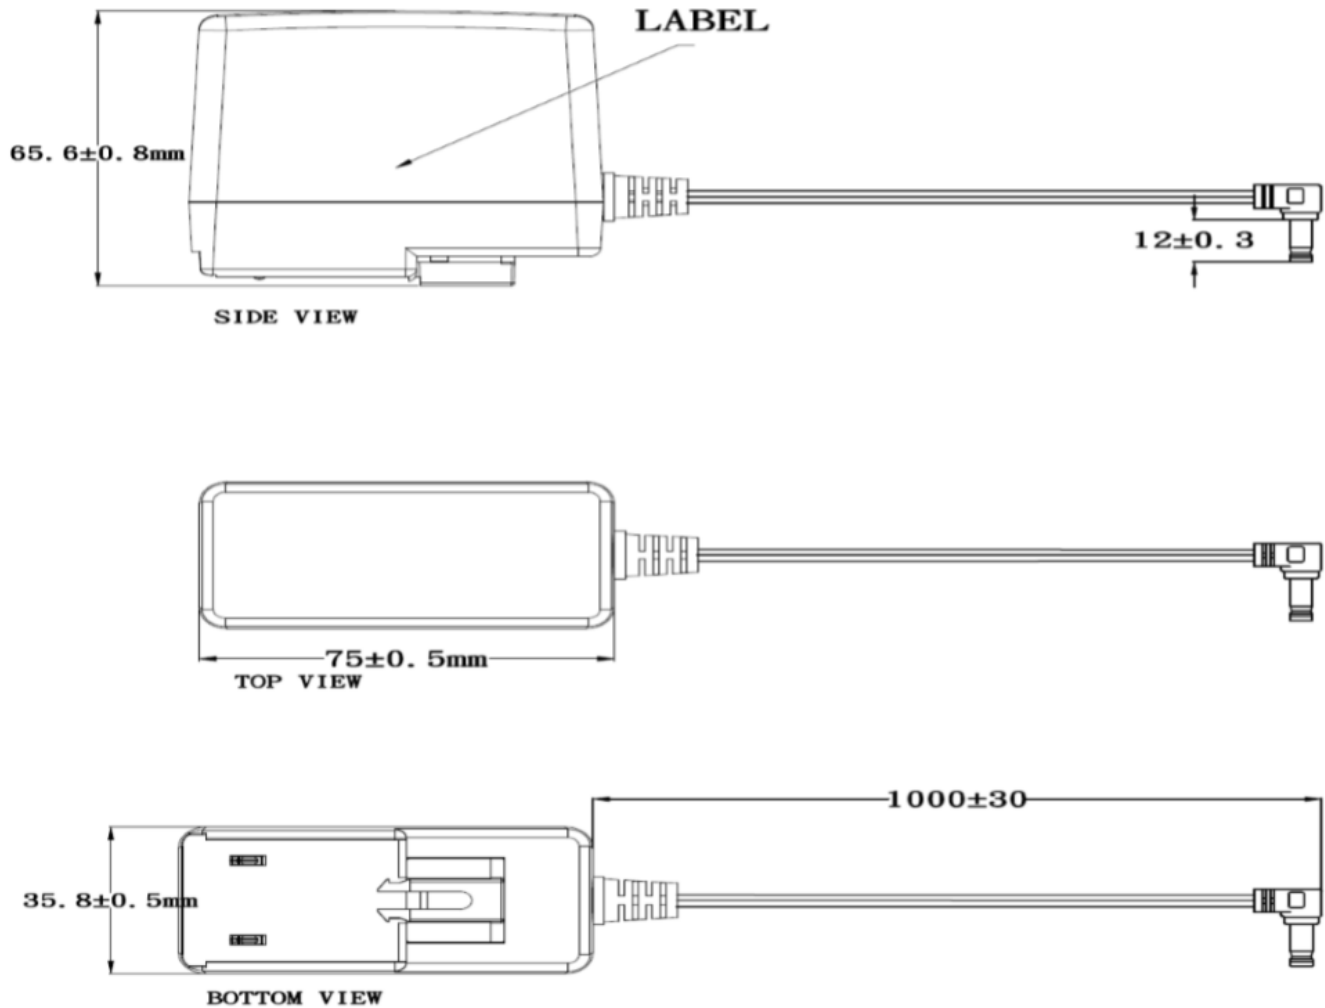

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

POWERPAX

TT Electronics IoT Solutions Ltd
Tofts Farm East, Brenda Road, Hartlepool, TS25 2BQ, UK
t: +44 (0) 1429 852 500