

Automotive & Industrial Grade Glass-Sealed Ceramic Base SMD Crystal



ABM3AIG

Pb in glass
(exempt 7(c) - I per RoHS II 2011/65/EU Annex)

5.0 x 3.2 x 1.3 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Features

- AEC-Q200 Qualified
- Automotive Grade 0: -40°C to +150°C
- TS16949 Production Line Certified
- PPAP Available Upon Request
- Hermetically Glass-sealed Ceramic Package
- RoHS/RoHS II Compliant

Applications

- Infotainment Systems
- Keyless Entry & Startup
- GPS & Navigation
- Comfort control
- ADAS (Advanced Driver Assistance Systems)
- Vehicle to Vehicle Communication
- LiDAR (Light Detection and Ranging)
- In-vehicle Networking
- Powertrain & Drive Control
- Power Control & Conversion
- Industrial Control & Automation

Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Notes
Frequency Range	8.000		50.000	MHz	
Operation Mode	Fundamental				
Operating Temperature	-40		+150	°C	Option "blank"; See options
	-40		+125		Option "K"; See options
Storage Temperature	-40		+150	°C	Option "blank"
	-40		+125		Options "K, J, D, N"
Frequency Tolerance @ +25°C	-50		+50	ppm	Option "blank"; See options
Frequency Stability over the Operating Temperature (ref. to +25°C)	-100		+100	ppm	Option "blank"; See options
	-150		+150		Option "R"; See options
Equivalent series resistance (R1)			150	Ω	8.000 – 9.999 MHz
			100		10.000 – 15.999 MHz
			60		16.000 – 19.999 MHz
			50		20.000 – 50.000 MHz
Shunt capacitance (C0)			3.0	pF	
Load capacitance (CL)	18			pF	Option "blank"; See options
Drive Level		10	100	μW	
Aging	-2		+2	ppm	@25°C± 3°C First year
Insulation Resistance	500			MΩ	@100 Vdc ± 15V

Automotive & Industrial Grade Glass-Sealed Ceramic Base SMD Crystal



ABM3AIG

Pb in glass
(exempt 7(c) - I per RoHS II 2011/65/EU Annex)

5.0 x 3.2 x 1.3 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Options and Part Identification (left blank if standard)

ABM3AIG- MHz - - - -

Frequency in MHz
Please specify the frequency in MHz.
(e.g. 14.31818MHz)

Load Capacitance (pF)
Blank: 18pF
If not standard, please specify CL in pF or S for series

Custom ESR if other than standard
R □: Specify a value in Ω (e.g.: R80)

Packaging
Blank: Bulk
T: 1k pcs / reel

Operating Temp.
Blank: -40°C to +150°C
N: -30°C to +85°C
D: -40°C to +85°C
J: -40°C to +105°C
K: -40°C to +125°C

Freq. Tolerance
Blank: ± 50 ppm
4: ± 30 ppm
3: ± 25 ppm
2: ± 20 ppm
7: ± 15 ppm
1: ± 10 ppm

Freq. Stability
Blank: ± 100 ppm
R: ± 150 ppm
Z: ± 50 ppm
P: ± 45 ppm (*)
F: ± 40 ppm (*)
H: ± 35 ppm (*)
Y: ± 30 ppm (*)
W: ± 25 ppm (*)
X: ± 20 ppm (*)
G: ± 15 ppm (*)

(*) Contact Abracon for Availability

Automotive & Industrial Grade Glass-Sealed Ceramic Base SMD Crystal




ABM3AIG

Pb in glass
(exempt 7(c) - I per RoHS II 2011/65/EU Annex)


5.0 x 3.2 x 1.3 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Mechanical Dimensions


Top View

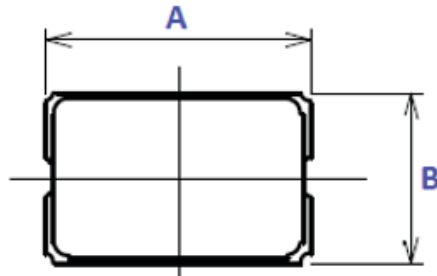


Side View



Bottom View

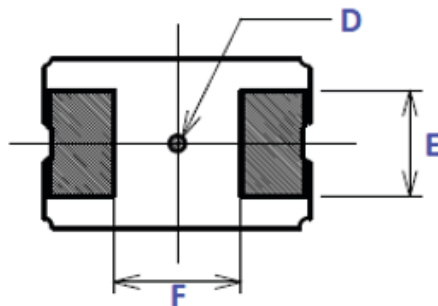


Recommended Land Pattern

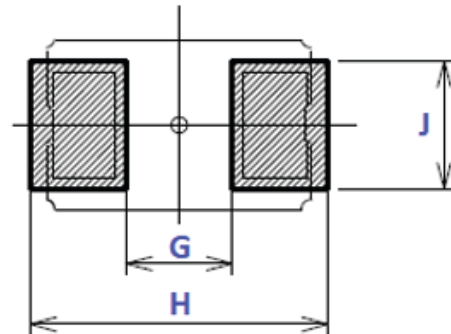

Alternative Bottom Packaging #1

Bottom View

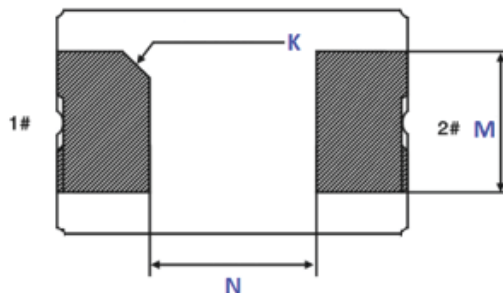

Dimensions

Dimensions	
A	5.0 ± 0.15
B	3.2 ± 0.15
C	1.3 ± 0.25
D	Ø 0.3
E	2.0
F	2.4
G	2.0
H	5.6
J	2.4
K	0.40 x 45°
M	2.0
N	2.4

Dimensions: mm

Automotive & Industrial Grade Glass-Sealed Ceramic Base SMD Crystal




ABM3AIG

Pb in glass
(exempt 7(c) - I per RoHS II 2011/65/EU Annex)

5.0 x 3.2 x 1.3 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Reflow Profile

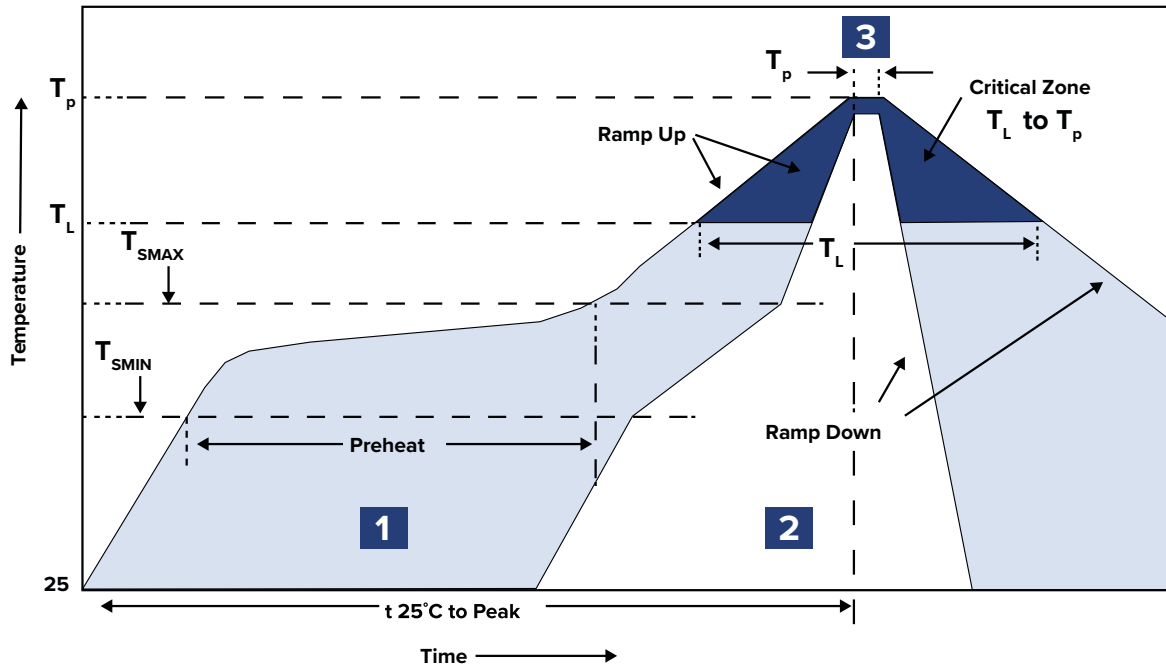

Zone	Description	Temperature	Time
1	Preheat / Soak	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 180°C	60 ~ 120 sec.
2	Reflow	T_L 230°C	30 ~ 40 sec.
3	Peak heat	T_P 260°C ± 5°C	10 sec. MAX

ABM3AIG

5.0 x 3.2 x 1.3 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

1000 pcs/reel



ABRACON[®] LLC

ABRACON IS
ISO9001-2015
CERTIFIED