



Protection against contact with a finger, IP2X, 3p, size 2



Part no. NZM2-XIPA
Catalog No. 266777

EL-Nummer (Norway) 0004358889

Delivery program

Accessories			IP2X protection against contact with a finger
Number of conductors			3 pole
Accessories			IP2X protection against contact with finger
For use with			NZM2, PN2, N(S)2
For use with			for cover NZM2-XKSA or NZM2 or NZM2...(C)NA und N(S)2...NA
Notes			
Type contains parts for a terminal located at top or bottom for 3 pole circuit-breakers.			
Enhancement of the busbar tag shroud to IP2X.			
When mounting NZM2...(C)NA or NZM...-NA the following applies:			
with 2 conductors max cross section 25 mm ² or AWG4.			

Design verification as per IEC/EN 61439

IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0


Low-voltage industrial components (EG000017) / Phase separation plate for power circuit breaker (EC002035)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Phase separation plate for circuit breaker (ecI@ss10.0.1-27-37-04-25 [ACN959011])			
Model			Other

Approvals

North America Certification

UL/CSA certification not required

Dimensions

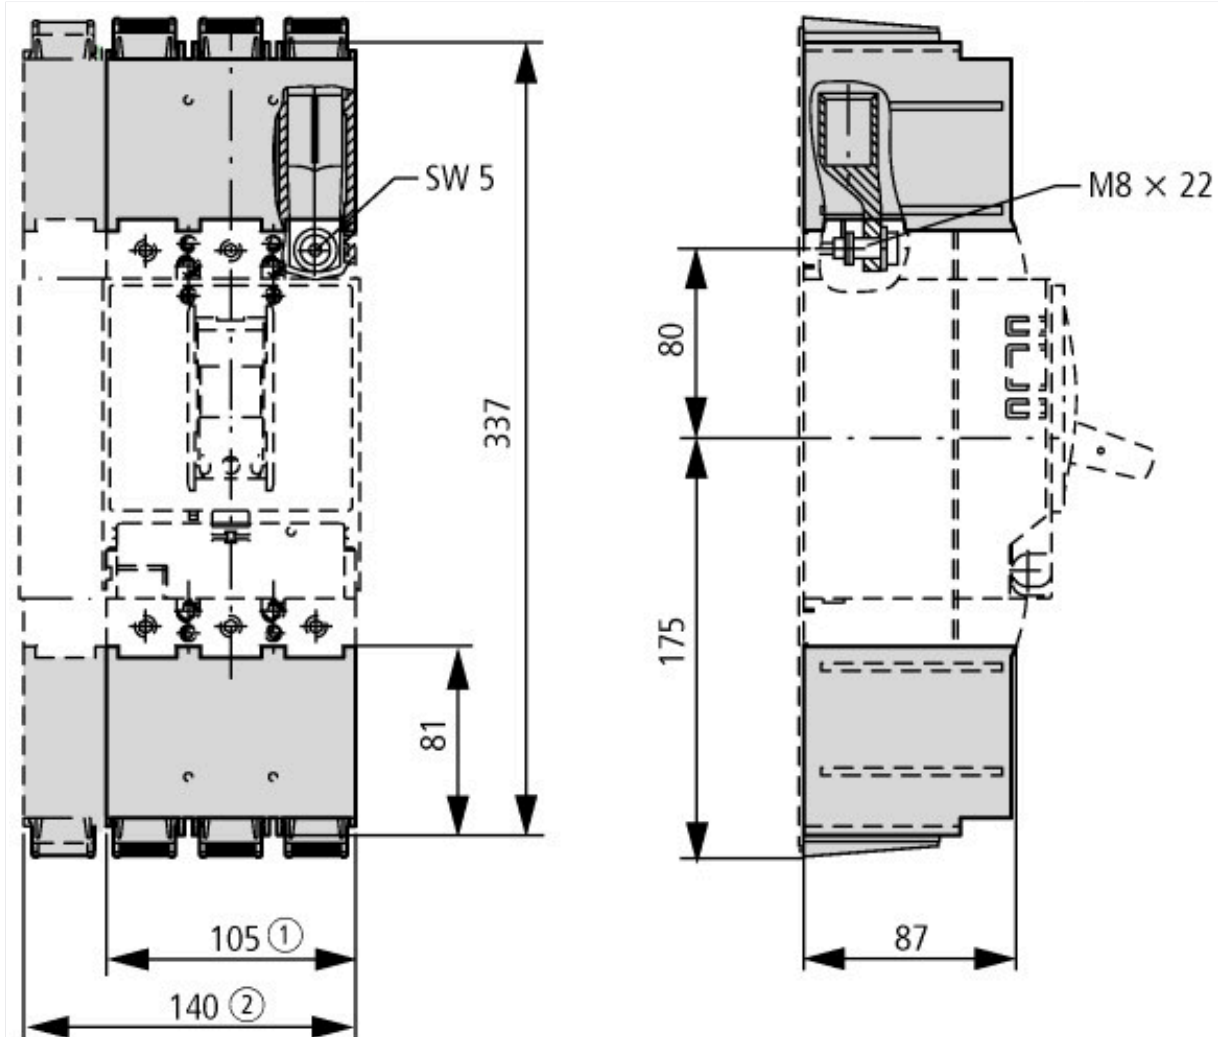

① 3 pole

② 4 pole

Additional product information (links)

IL01219008Z (AWA1230-2057) IP2X fingerproof

IL01219008Z (AWA1230-2057) IP2X fingerproof http://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219008Z2018_11.pdf