

3kW Fan cooled

AC-DC power supplies

The HDL3000 series offers users both output voltage and output current programming (0 – 105%) via resistance, voltage or digital bus in a very high efficiency, high power density 3kW chassis mount package.

Measuring just 316.5 x 170.0 x 63.5mm (12.46" x 6.69" x 2.5"), the HDL3000 also features active current sharing, built-in ORing diode, remote on/off and a power OK signal. The standby output is available whenever the mains supply is present and can be user selected as either 5VDC at 0.5A or 9VDC at 0.3A.

The HDL3000 can serve a multitude of applications where a controllable, high-power capability is required, for example: Battery simulation; Automation; Robotics; Lasers; Electro-plating; Cathodic protection; Test & Measurement; Specialist LED heating/curing.



Features

- ▶ 3kW fan cooled
- ▶ Single phase input 90 to 264VAC
- ▶ Nominal output voltages 12/15/24/30/36/48/60VDC
- ▶ Programmable output voltage (0-105%)
- ▶ Programmable output current (0-105%)
- ▶ ITE safety agency approvals
- ▶ Class A conducted & radiated emissions
- ▶ High efficiency, up to 93%
- ▶ Intelligent fan speed control
- ▶ Fully featured signals & controls
- ▶ Digital protocol: I²C
- ▶ 5VDC 0.5A or 9VDC 0.3A standby
- ▶ -20°C to +60°C operating temperature
- ▶ Full power to +50°C
- ▶ 3 year warranty

Applications



Dimensions

316.5 x 170.0 x 63.5mm (12.46" x 6.69" x 2.5") including connectors

Documentation

For further information click the link or scan the code

→ xppower.com



Models & ratings

Model number	Output power		Output voltage	Output current		Ripple & noise	Efficiency ⁽¹⁾
	High line	Low line		High line	Low line		
HDL3000PS12	2.4kW	1.6kW	12.0VDC	200.0A	166.6A	150mV	88%
HDL3000PS15	2.4kW	1.6kW	15.0VDC	160.0A	133.3A	150mV	89%
HDL3000PS24	3kW	2kW	24.0VDC	125.0A	83.3A	240mV	91%
HDL3000PS30	3kW	2kW	30.0VDC	100.0A	66.6A	300mV	91%
HDL3000PS36	3kW	2kW	36.0VDC	83.5A	55.5A	360mV	92%
HDL3000PS48	3kW	2kW	48.0VDC	62.5A	41.6A	480mV	92%
HDL3000PS60	3kW	2kW	60.0VDC	50.0A	33.3A	600mV	93%

Notes:

1. Measured with 230VAC input and full load.

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Input voltage	90		264	VAC	See derating curve
Input frequency	47		63	Hz	
Power factor		0.98/0.95			115/230VAC full load
Input current			19.7/15.0	A	115VAC at 2kW/230VAC at 3kW
Inrush current			43/110	A	115/230VAC
Earth leakage current			3	mA	264VAC/60Hz

Output



Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Output voltage	12		60	VDC	See Models and Ratings table
Output trim		±5		%	By potentiometer
Output voltage program	0		105	%	Of rated output
Output current program	0		105	%	Of rated output
Voltage tolerance ⁽¹⁾			±2	%	Of rated output voltage ⁽¹⁾
Current tolerance ⁽¹⁾			±3	%	Of rated output current ⁽¹⁾
Minimum load	0			A	
Start up delay			1	s	
Start up rise time			120	ms	At full load
Hold up time	10	11		ms	At 230VAC and full load
Line regulation			±1	%	
Load regulation			±1 (V1) /±3	%	V1 Standby. 0-100% load
Transient response		<1		%	For a 25% step load change
Ripple & noise	150		600	mV pk-pk	See models and ratings table. Measured with 20MHz bandwidth and using 300mm (12") twisted pair wire terminated with 0.1µF ceramic capacitor and 47µF electrolytic at +25°C ambient.
Overvoltage protection	Tracks output voltage, see application notes. Recycle AC to reset.				
Overtemperature protection	Primary and secondary heatsinks, monitored. Output shuts down, auto recovers				
Overload protection		105			Rated power, constant current.
Short circuit protection	Auto recovery.				
Temperature coefficient		±0.02		%/°C	0 to +50°C
Remote sense	Compensates for 0.5V max voltage drop, if remote sense is not required, local sense must be used				
Enable	Output must be enabled, see application notes, power supply is shipped with enable links fitted				
Current share	5 supplies can share within 5%				
Standby output	5VDC at 0.5A, present whenever AC is applied (9VDC at 0.3A, user selectable, by connecting 'VSET', Pin 6 of CN2 to GND).				

Notes:



1. Tolerance includes setup time tolerance, line regulation and load regulation.

Output


Output voltage programming

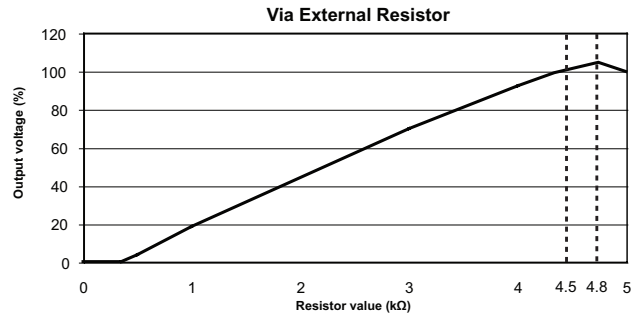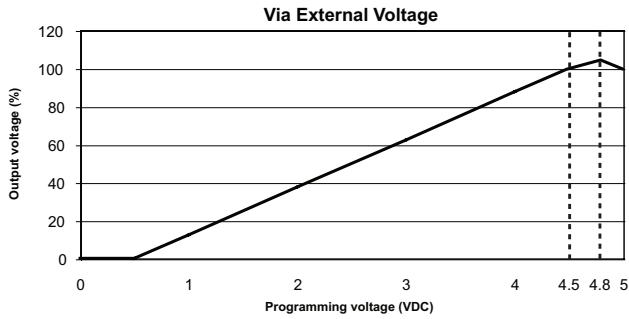

Output current programming

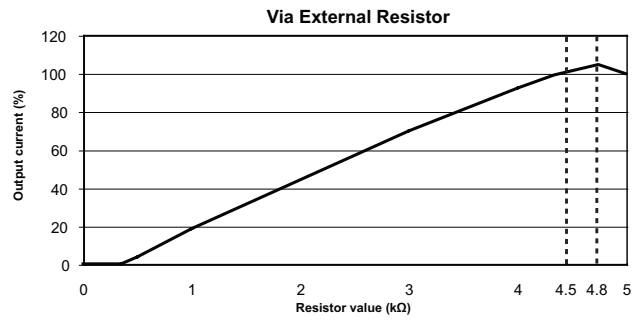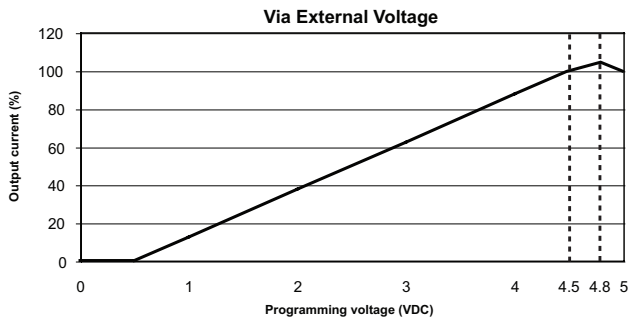

Output voltage/current programming

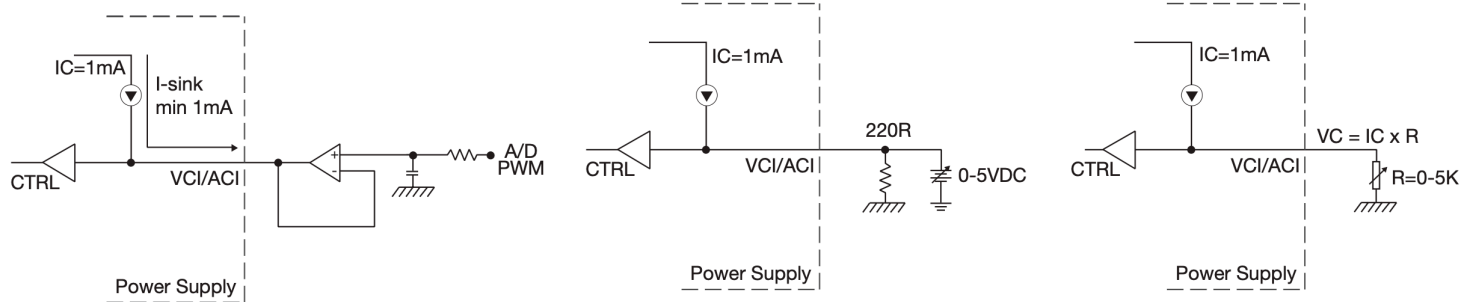

General


Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Efficiency	88		93	%	See Models and Ratings table.
Isolation: input to output input to ground output to ground	3000			VAC	
	1500			VAC	
	500			VAC	
Switching frequency		65		kHz	PFC
	40		200		PWM, variable
Power density			36.5 (598.1)	W/cm ³ (W/in ³)	
Signals and controls	Enable, Current share, V program, I program, 5VDC standby, power OK				
Mean time between failure		90		khrs	MIL-HDBK-217F, +25°C GB
Weight		3.6 (7.94)		kg (lb)	

Environmental


Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Operating temperature	-20		+60	°C	Derate linearly from 100% load at +50°C to 50% load at +60°C
Storage temperature	-40		+85	°C	
Cooling	Internal fan fitted, speed increases with load and internal temperature				
Humidity	20		90	%RH	Non-condensing.
Operating altitude			3100	m	
Vibration			2	g	10-500Hz, 10 min/cycle, 60 min period for each axis, compliant to IEC60068-2-16, IEC60068-2-64.

Derating curve

Thermal derating curve

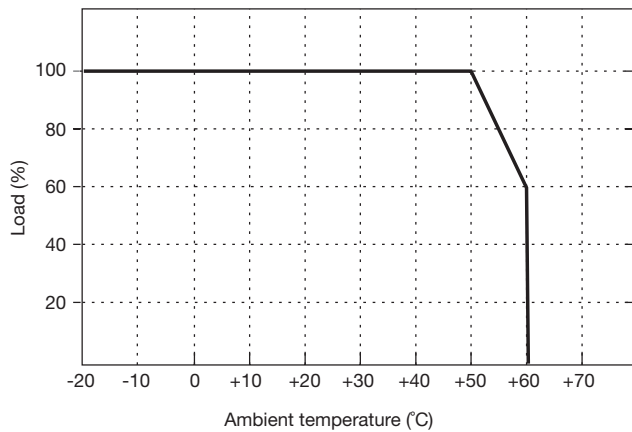

Input derating curve

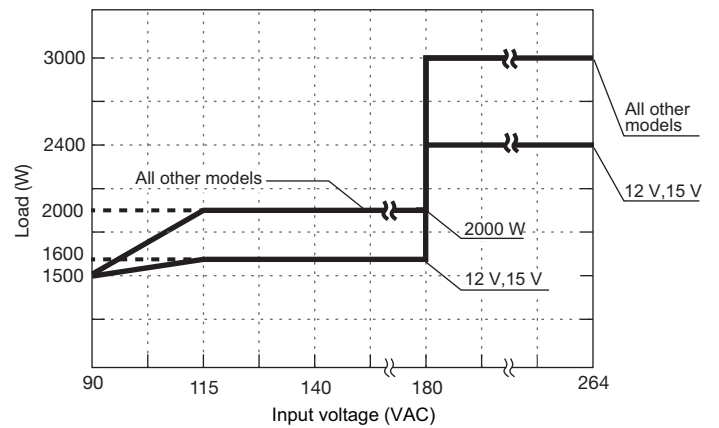

EMC: emissions

Phenomenon	Standard	Test level	Notes & conditions
Conducted	EN55032	Class A	
Radiated	EN55032	Class A	
Harmonic currents	EN61000-3-2	Class A	
Voltage flicker	EN61000-3-3		

EMC: immunity

Phenomenon	Standard	Test level	Criteria	Notes & conditions
ESD immunity	EN61000-4-2	2/3	A	±4kV contact, ±8kV air discharge
Radiated immunity	EN61000-4-3	3	A	
EFT	EN61000-4-4	3	A	10V/m
Surges	EN61000-4-5	Installation class 3	A	
Conducted	EN61000-4-6	3	A	10V
Dips	EN55024	Dip: 30% 500ms	A	30A/m
Interrupt		Int >95% 10ms	A	
		Int >95% 5000ms	B	

Safety approvals


Certification	Standard	Notes & conditions
CB report	IEC62368-1: 2014	Audio/video, information and communication technology equipment
UL	UL62368-1, CAN/CSA C22.2 No.62368-1-14	
TUV	EN62368-1: 2014/A11: 2017	
CE	Meets all applicable directives	
UKCA	Meets all applicable legislation	

Signals & controls

Characteristic	Output status
Solid (Green)	DC Output OK
Solid (Orange)	DC Output OK in remote control mode
Slow blink (Green)	Output not enabled
Slow blink (Orange)	Output not enabled in remote control mode
Fast blink (Red)	Over voltage
Solid (Red)	Over loaded
Slow blink (Red)	Over temperature
Intermittent blink (Red)	Fan fail
Short & long blink (Red)	AUX standby failure


Application Notes

Remote enable

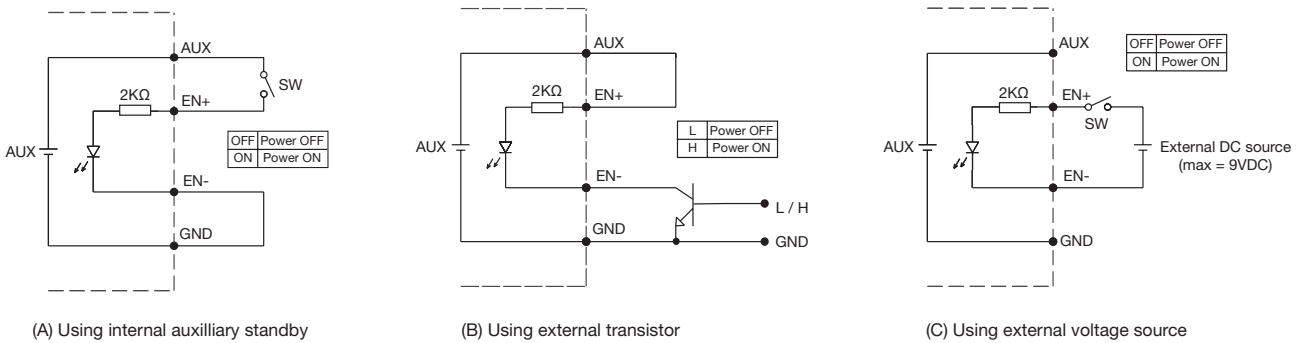


*GND shown in above diagram is referring to the GND of CN5, not the grounding from output power (NEG (-))

Power OK signal

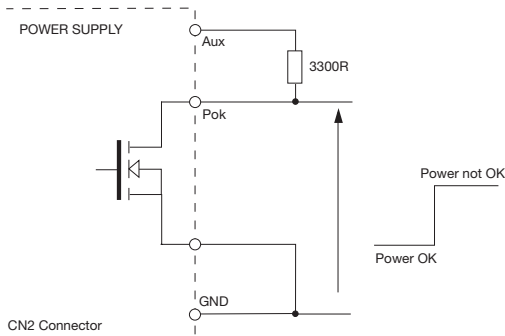


Open drain signal, low when PSU turns on
 Maximum sink current: 20mA
 Maximum drain voltage: 40V

OVP setting

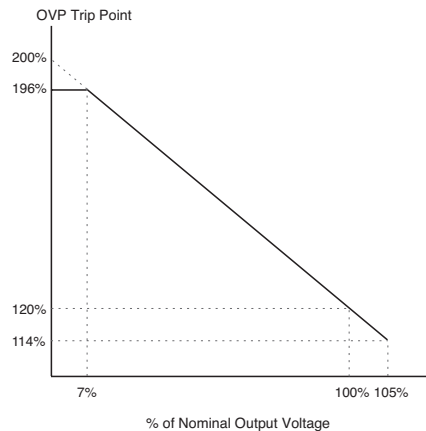


Application Notes

Current sharing with remote sense

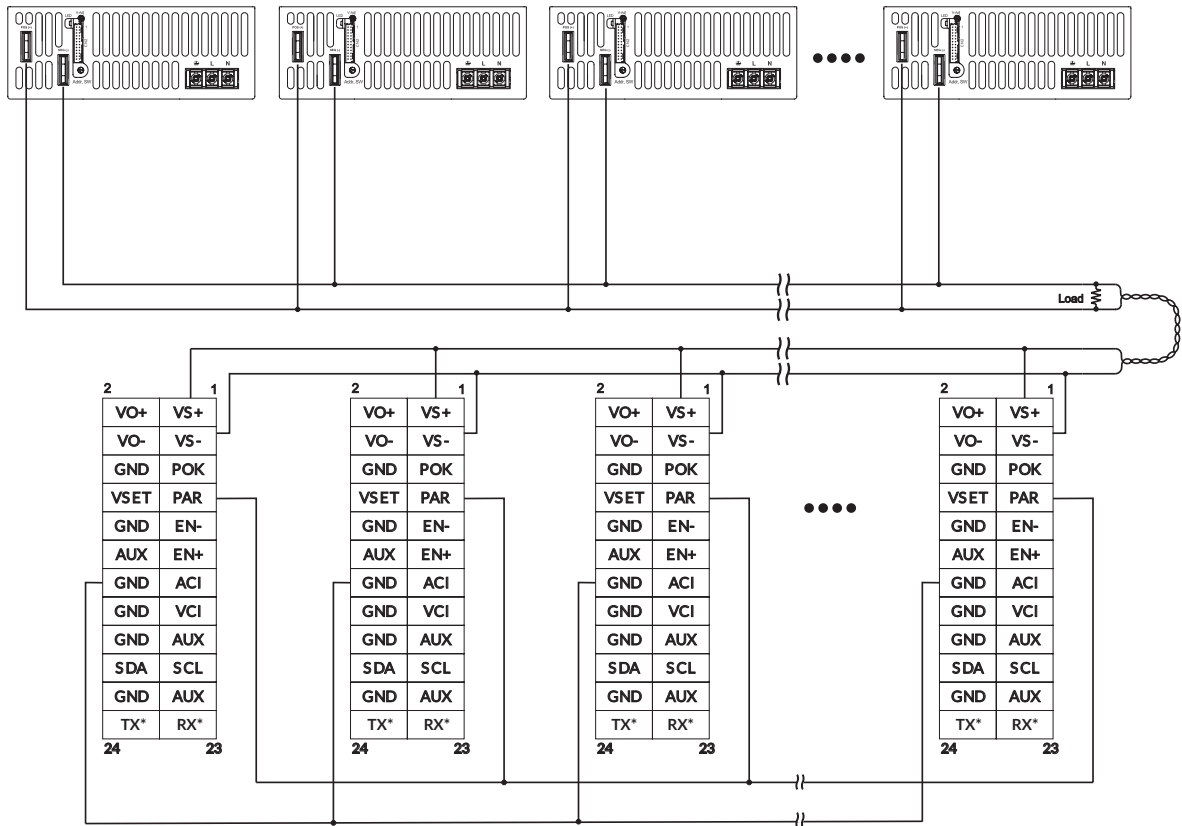

Remote sense

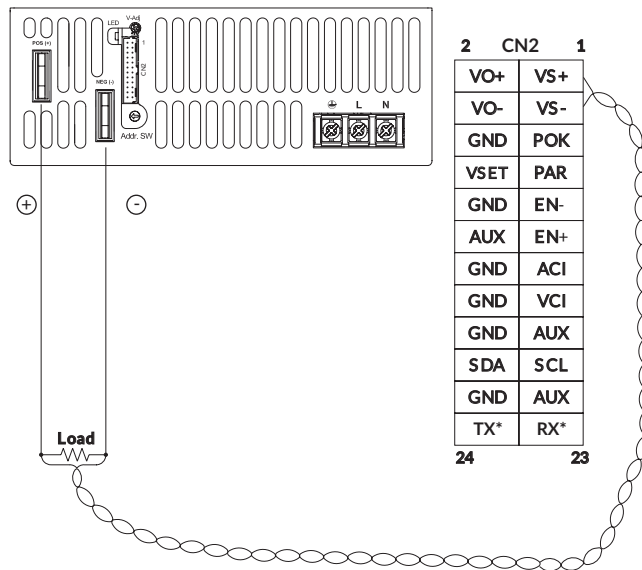


Notes:


1. In parallel operation, it is possible that only one unit will operate if the load is less than 5% of the combined rated output load. It is possible to have more than five units in parallel, contact sales for details. *Pin 23 and 24, Only usable with driver board "KIT-RS232-X" or "KIT-RS485-1"

Application Notes

Current sharing with local sense

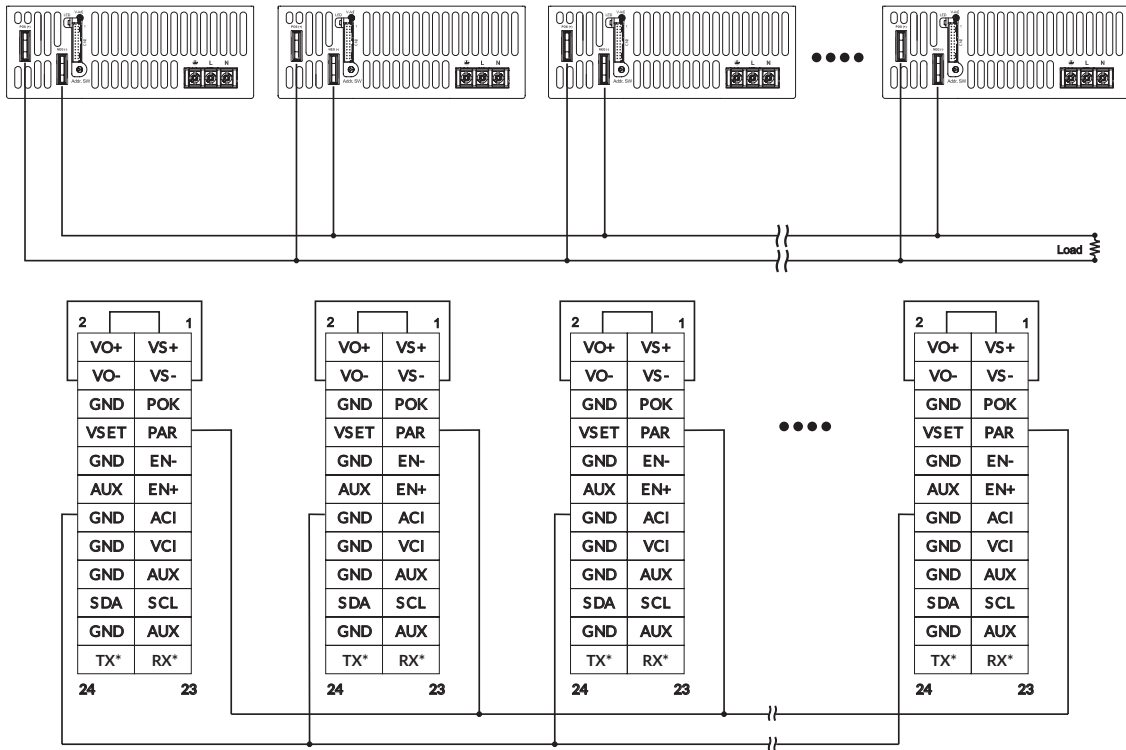


Local sense

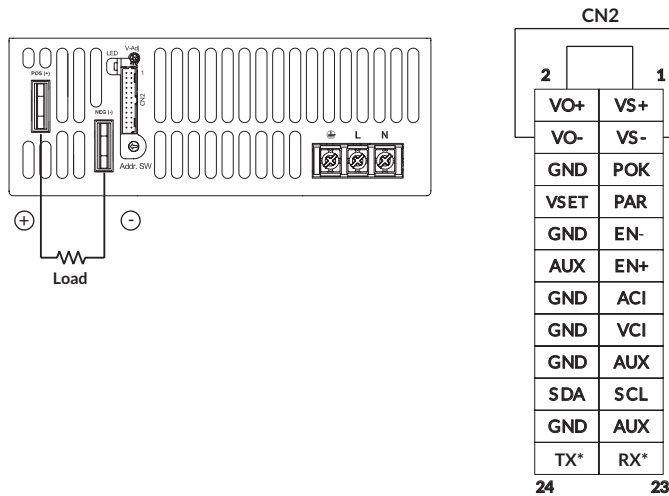

Notes:

1. In parallel operation, it is possible that only one unit will operate if the load is less than 5% of the combined rated output load. It is possible to have more than five units in parallel, contact sales for details. *Pin 23 and 24, Only usable with driver board "KIT-RS232-X" or "KIT-RS485-1"
2. Maximum output current should not exceed 90% of the combined rated current of the units in parallel

Mechanical details

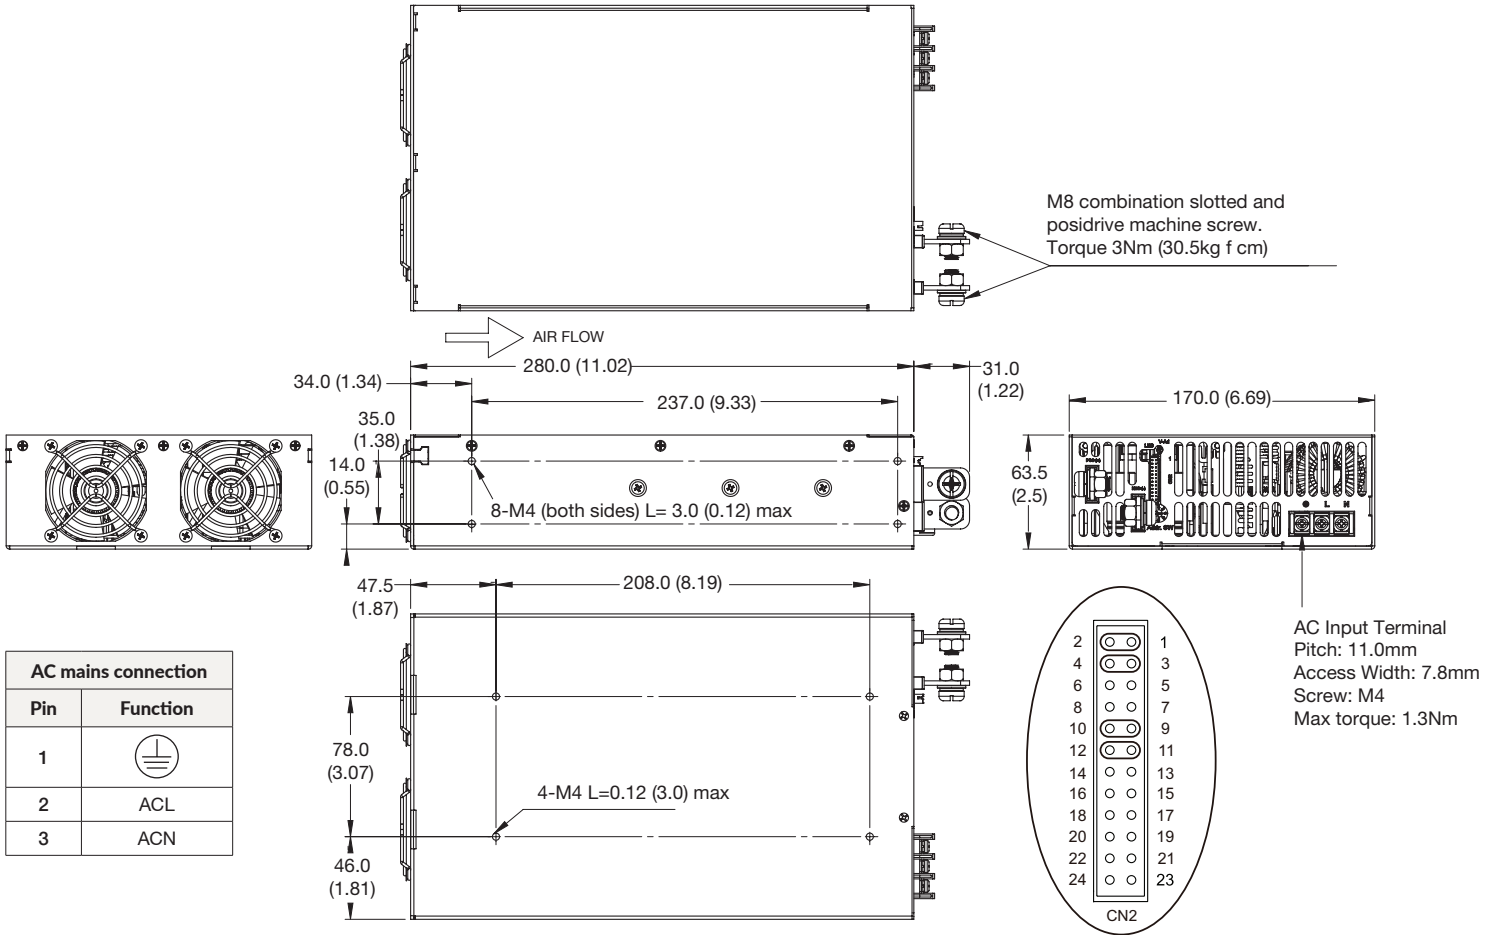

CN2 control pin connection								
Pin	Function	Description	Pin	Function	Description	Pin	Function	Description
1	VS+	Remote sense (+)	9	EN-	Inhibit On/Off (-)	17	AUX	+5V/0.5A or +9V/0.3A Standby power
2	VO+	Positive output voltage	10	GND	Ground	18	GND	Ground
3	VS-	Remote sense (-)	11	EN+	Inhibit On/Off (+)	19	SCL	I ² C serial clock
4	VO-	Negative output voltage	12	AUX	+5V/0.5A or +9V/0.3A Standby power	20	SDA	I ² C serial data
5	POK	Power OK	13	ACI	I program	21	AUX	+5V/0.5A or +9V/0.3A power
6	GND	Ground	14	GND	Ground	22	GND	Ground
7	PAR	Parallel operation current share	15	VCI	V program	23	RX ⁽¹⁾	Receive
8	VSET	Aux output setting	16	GND	Ground	24	TX ⁽¹⁾	Transmit Transmit For RS485 Data+ interface

Notes:

1. Only usable with driver board "KIT-RS232-X" or "KIT-RS485-1"
2. Dimensions shown in mm (inches).
3. Weight: 3.6kg (7.94lb)

4. Mating Connector: CN2 JST PHDR-24VS Housing, SPHD-002T-P0.5 Contact
5. Torque of mounting M4 screw: 1.27Nm (13.0kg f cm)