



busbar adapter Size S2, for mechanical attachment of circuit breaker and soft starter 3RV2 and 3RW303/3RW403 Can be snapped onto standard mounting rail or for screw mounting (individual unit packaging)

product brand name	SIRIUS
product category	DIN-rail adapter
product designation	DIN rail adapter
design of the product	for mechanical attachment of circuit breakers and soft starters
product type designation	3RA29

General technical data

material	plastic
certificate of suitability	CE / UL
size of the circuit-breaker	S2
size of contactor	S2
Substance Prohibittance (day/month/year)	03/01/2017
Net Weight	0.266 kg

Installation/ mounting/ dimensions

fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	324 mm
width	55 mm
depth	27.8 mm

Approvals Certificates

Environment	General Product Approval	Test Certificates	Maritime application
-------------	--------------------------	-------------------	----------------------

[Environmental Confirmations](#)



[Special Test Certificate](#)



Maritime application	other
----------------------	-------



[Confirmation](#)

[Confirmation](#)

other



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2932-1CA00>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2932-1CA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2932-1CA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2932-1CA00&lang=en

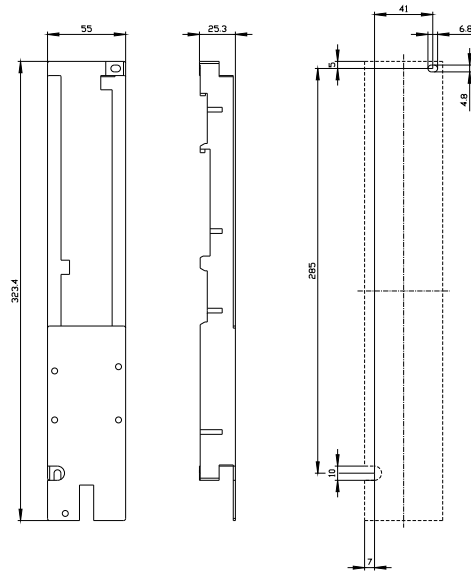

last modified:

4/2/2025 