
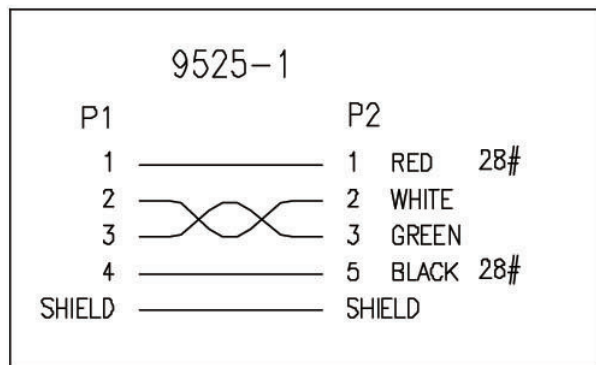


P1: M-942A

P2: M-971A

REV.1 2003.12.18

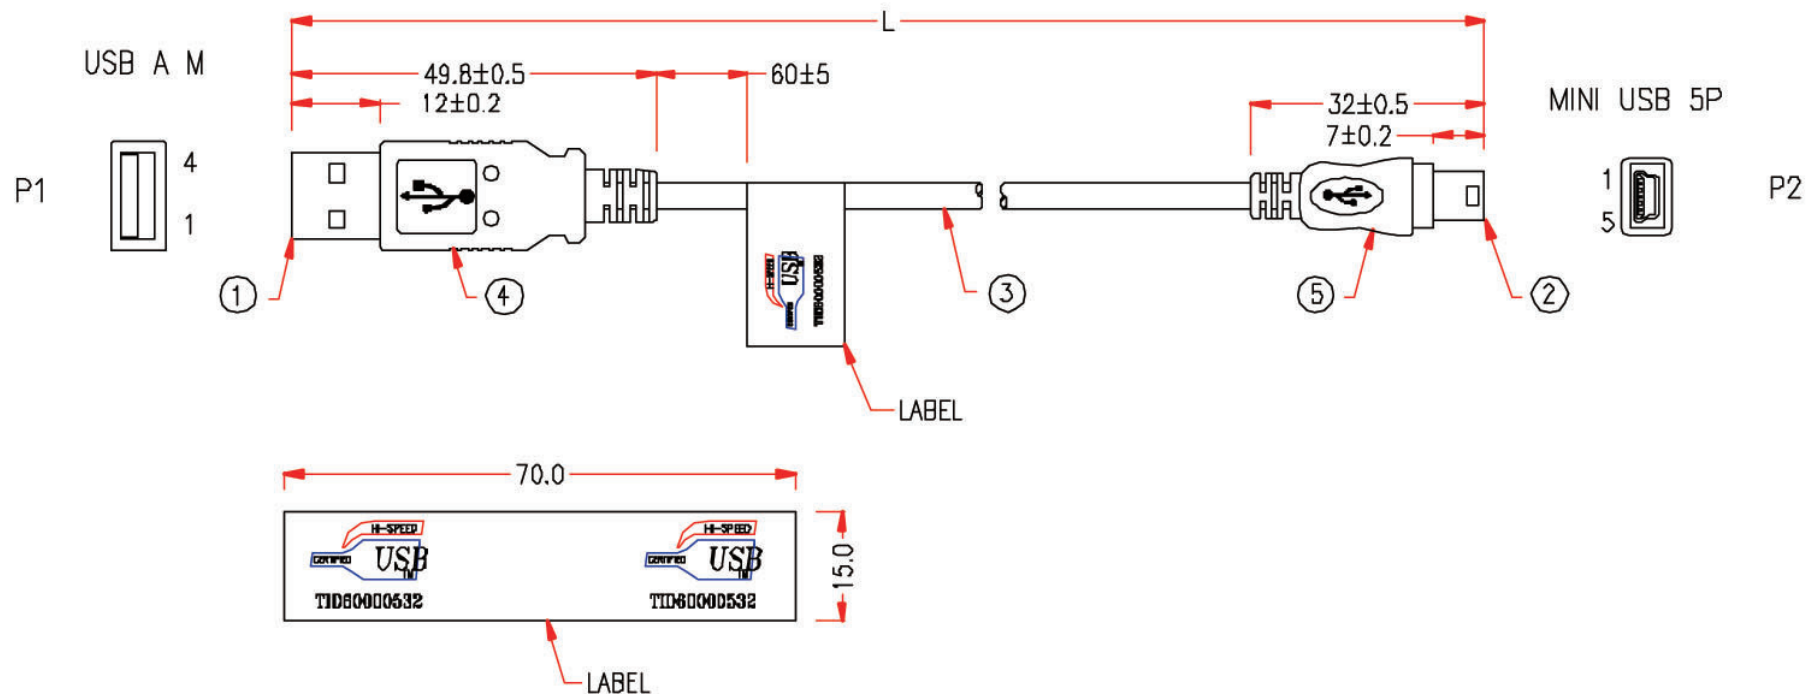

5	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 5\text{mm}$	5	M519
	MOLDED PVC BEIGE		M304
4	MOLDED PVC BEIGE		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 28AWG, OD 3.5mm, JACKET BEIGE	L	M2
2	MINI USB 5P MALE 2.0, GOLD FLASH 30u' ON CONTACTS, BLACK INSULATOR	1set	M1
1	USB A MALE 2.0, GOLD FLASH 30u' ON CONTACTS, WHITE INSULATOR, SHORT TYPE	1set	M1
No.	DESCRIPTION	Q'TY	Supplier

APPROVED				Cable Length Unless Otherwise Spec. Tolerances: 0 ~0.2M ±0.01M 0.21~1.0M ±0.02M 1.1 ~1.5M ±0.025M 1.51~2.1M ±0.03M 2.1M ±0.04M
CHECKED				
DRAWING		ITEM NO.	USB2-062	

REV.1

Ref: No.4



UNIT:mm

DRAWING

ITEM NO.

USB2-062