



button, 1 NO 20 A 1 key red, Lamp 230 V for long supply lines

Figure similar

Model	
product brand name	SENTRON
product designation	Pushbutton
design of the product	1 NO contact
type of light source	LED
socket design for light source	others
mechanical service life (operating cycles) typical	25 000
type of voltage of the operating voltage	AC
surge voltage resistance rated value	4 kV
Supply voltage	
operating voltage rated value	400 V
Protection class	
protection class IP	IP20
making capacity current	60 A
current breaking capacity	60 A
Dissipation	
power loss [W]	
<ul style="list-style-type: none"> for rated value of the current at AC in hot operating state per pole 	0.6 W
<ul style="list-style-type: none"> maximum 	0.6 W
Appearance	
color	
<ul style="list-style-type: none"> of the button 	red
Product details	
product component signal lamp	Yes
number of NC contacts	0
number of NO contacts	1
number of CO contacts	0
Display and operation	
number of keys	1
connectable conductor cross-section for flexible conductor with core end processing	
<ul style="list-style-type: none"> minimum 	1 mm ²
<ul style="list-style-type: none"> maximum 	6 mm ²
connectable conductor cross-section for rigid conductor	
<ul style="list-style-type: none"> minimum 	1 mm ²
<ul style="list-style-type: none"> maximum 	6 mm ²
tightening torque with screw-type terminals	

- minimum 0.8 N·m
- maximum 1 N·m

Mechanical Design

height	90 mm
depth	70 mm
installation depth	70 mm
number of modular width units	1
Net Weight	75 g
ambient temperature during operation	
• minimum	-5 °C
• maximum	40 °C

Approvals Certificates

Environment	General Product Approval
-------------	--------------------------

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



[Confirmation](#)

General Product Approval	Test Certificates	other
--------------------------	-------------------	-------



[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TE4822>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TE4822>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE4822

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

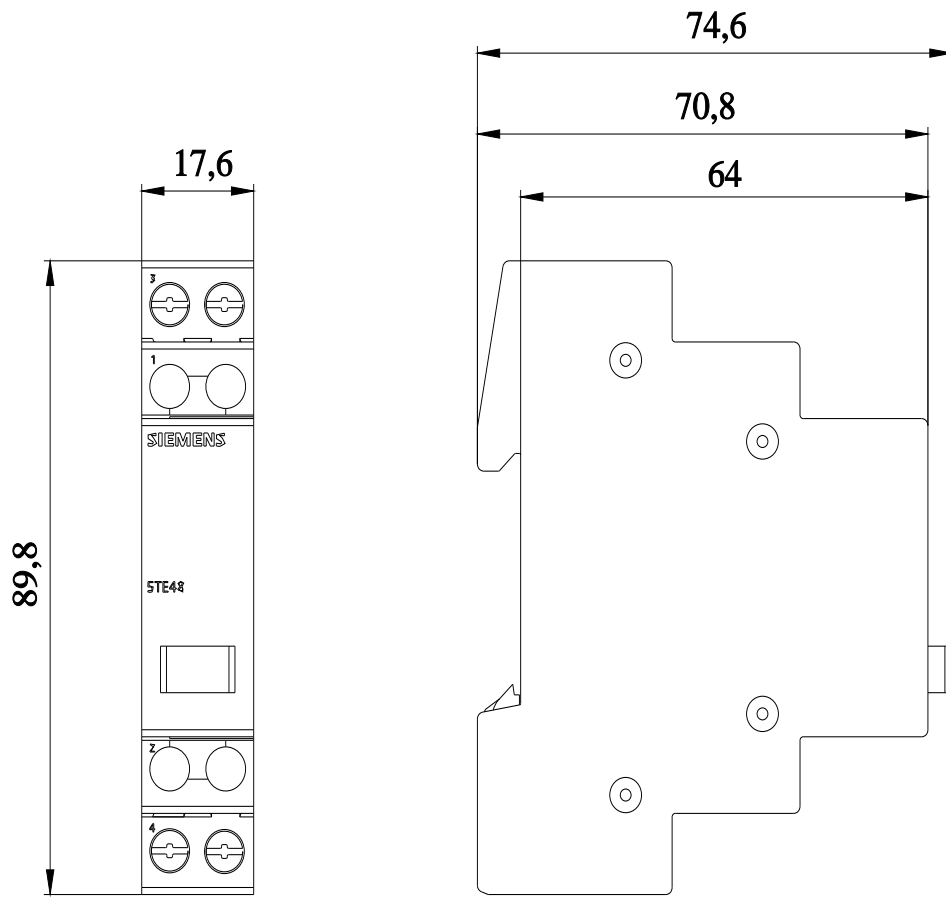

last modified:

4/11/2025 

