

MEA-2700-LTE

LOW PROFILE LTE ANTENNA

Part #: 100-00126-01

Description

The MEA-2700-LTE is a ultra-rugged broadband 4G LTE antenna featuring a N-Type connector. It covers the LTE frequency ranges 698-960 MHz| 1710-2700 MHz| 2500-2700 MHz with a nominal gain of 3 dBi. This low-profile antenna is designed to provide industry leading wide-band performance and optimal coverage of LTE frequencies, with minimum loss and no tuning required. The MEA-2700-LTE antenna compact housing consists of black ABS UV resistant plastic, with a heavy-duty metal base. The antenna is rated IP66.

Electrical Specifications

Parameter	Specification
Frequency Range	698-960 / 1710-2700 / 2500-2700 MHz
Bandwidth	262/460/200 MHz
Gain	3 dBi
VSWR	≤ 2.5
Radiation	Omni-directional
Polarization	Vertical
Maximum Input Power	50W
Impedance	50 Ω

Mechanical Specifications

Parameter	Specification
Antenna Dimensions	22 x 66mm
Weight	46g
Operating Temperature	-40 °C to +70 °C
Antenna Radome Material	ABS
Connector	N Female
ROHS Compliant	Yes



Features

- Low profile design for easy installation
- Heavy duty applications
- Can be used for mobile and fixed base applications
- Compact housing that makes the antenna ideal for indoor or outdoor applications
- Covers all cellular/LTE frequencies: 698-960/1710-2170/2500-2700 MHz
- Small size: 22 x 66mm
- ROHS compliant
- Rated IP66


Applications

- M2M applications
- IoT
- Telematics
- Asset tracking
- Fleet tracking
- Automotive


Radiation Specifications

698-960 MHz


Gain vs. Theta

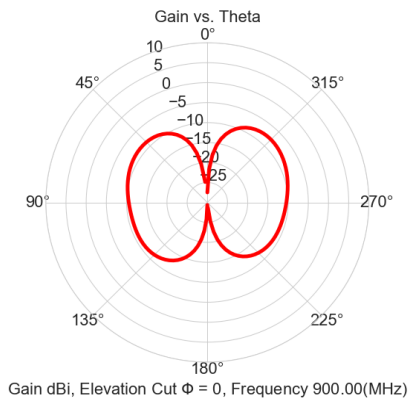

Efficiency vs. Frequency

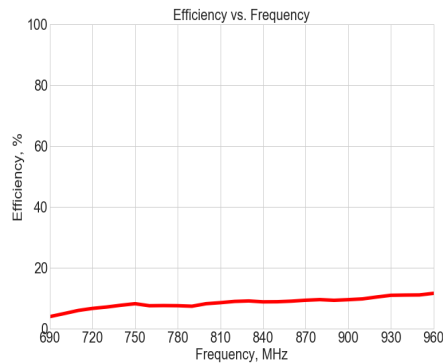


Gain vs. Frequency

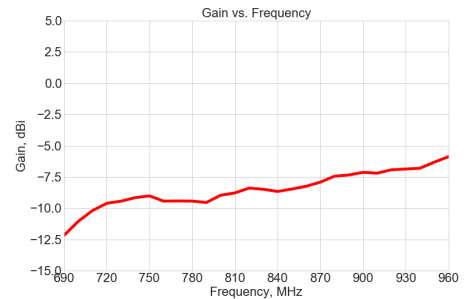


Radiation Specifications

1710-2700 MHz


Gain vs. Theta

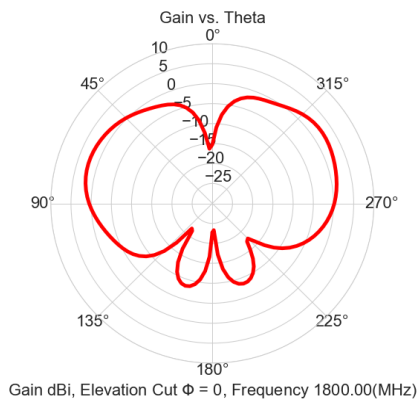

Efficiency vs. Frequency

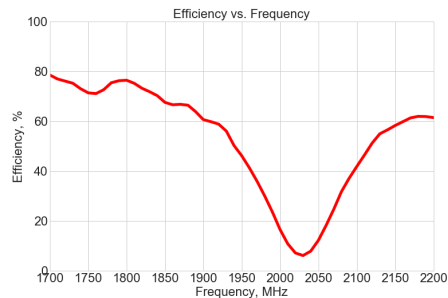


Gain vs. Frequency

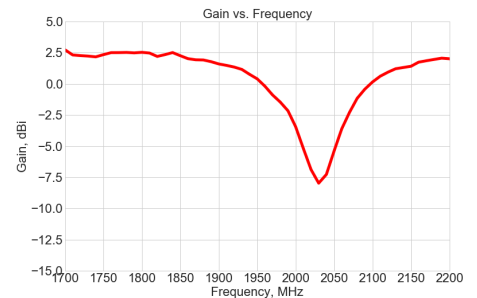


Radiation Specifications

2500-2700 MHz


Gain vs. Theta

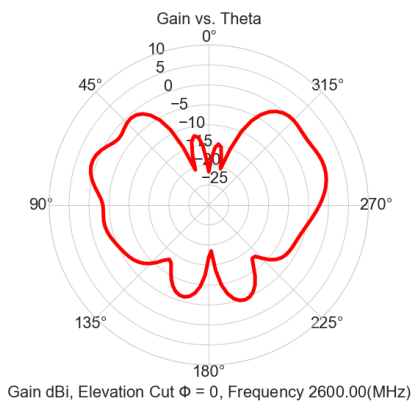


Efficiency vs. Frequency

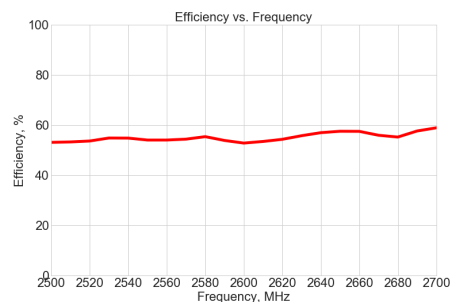

Gain vs. Frequency

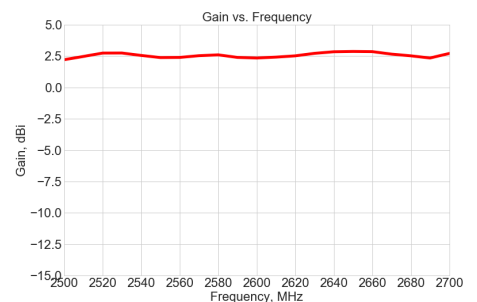

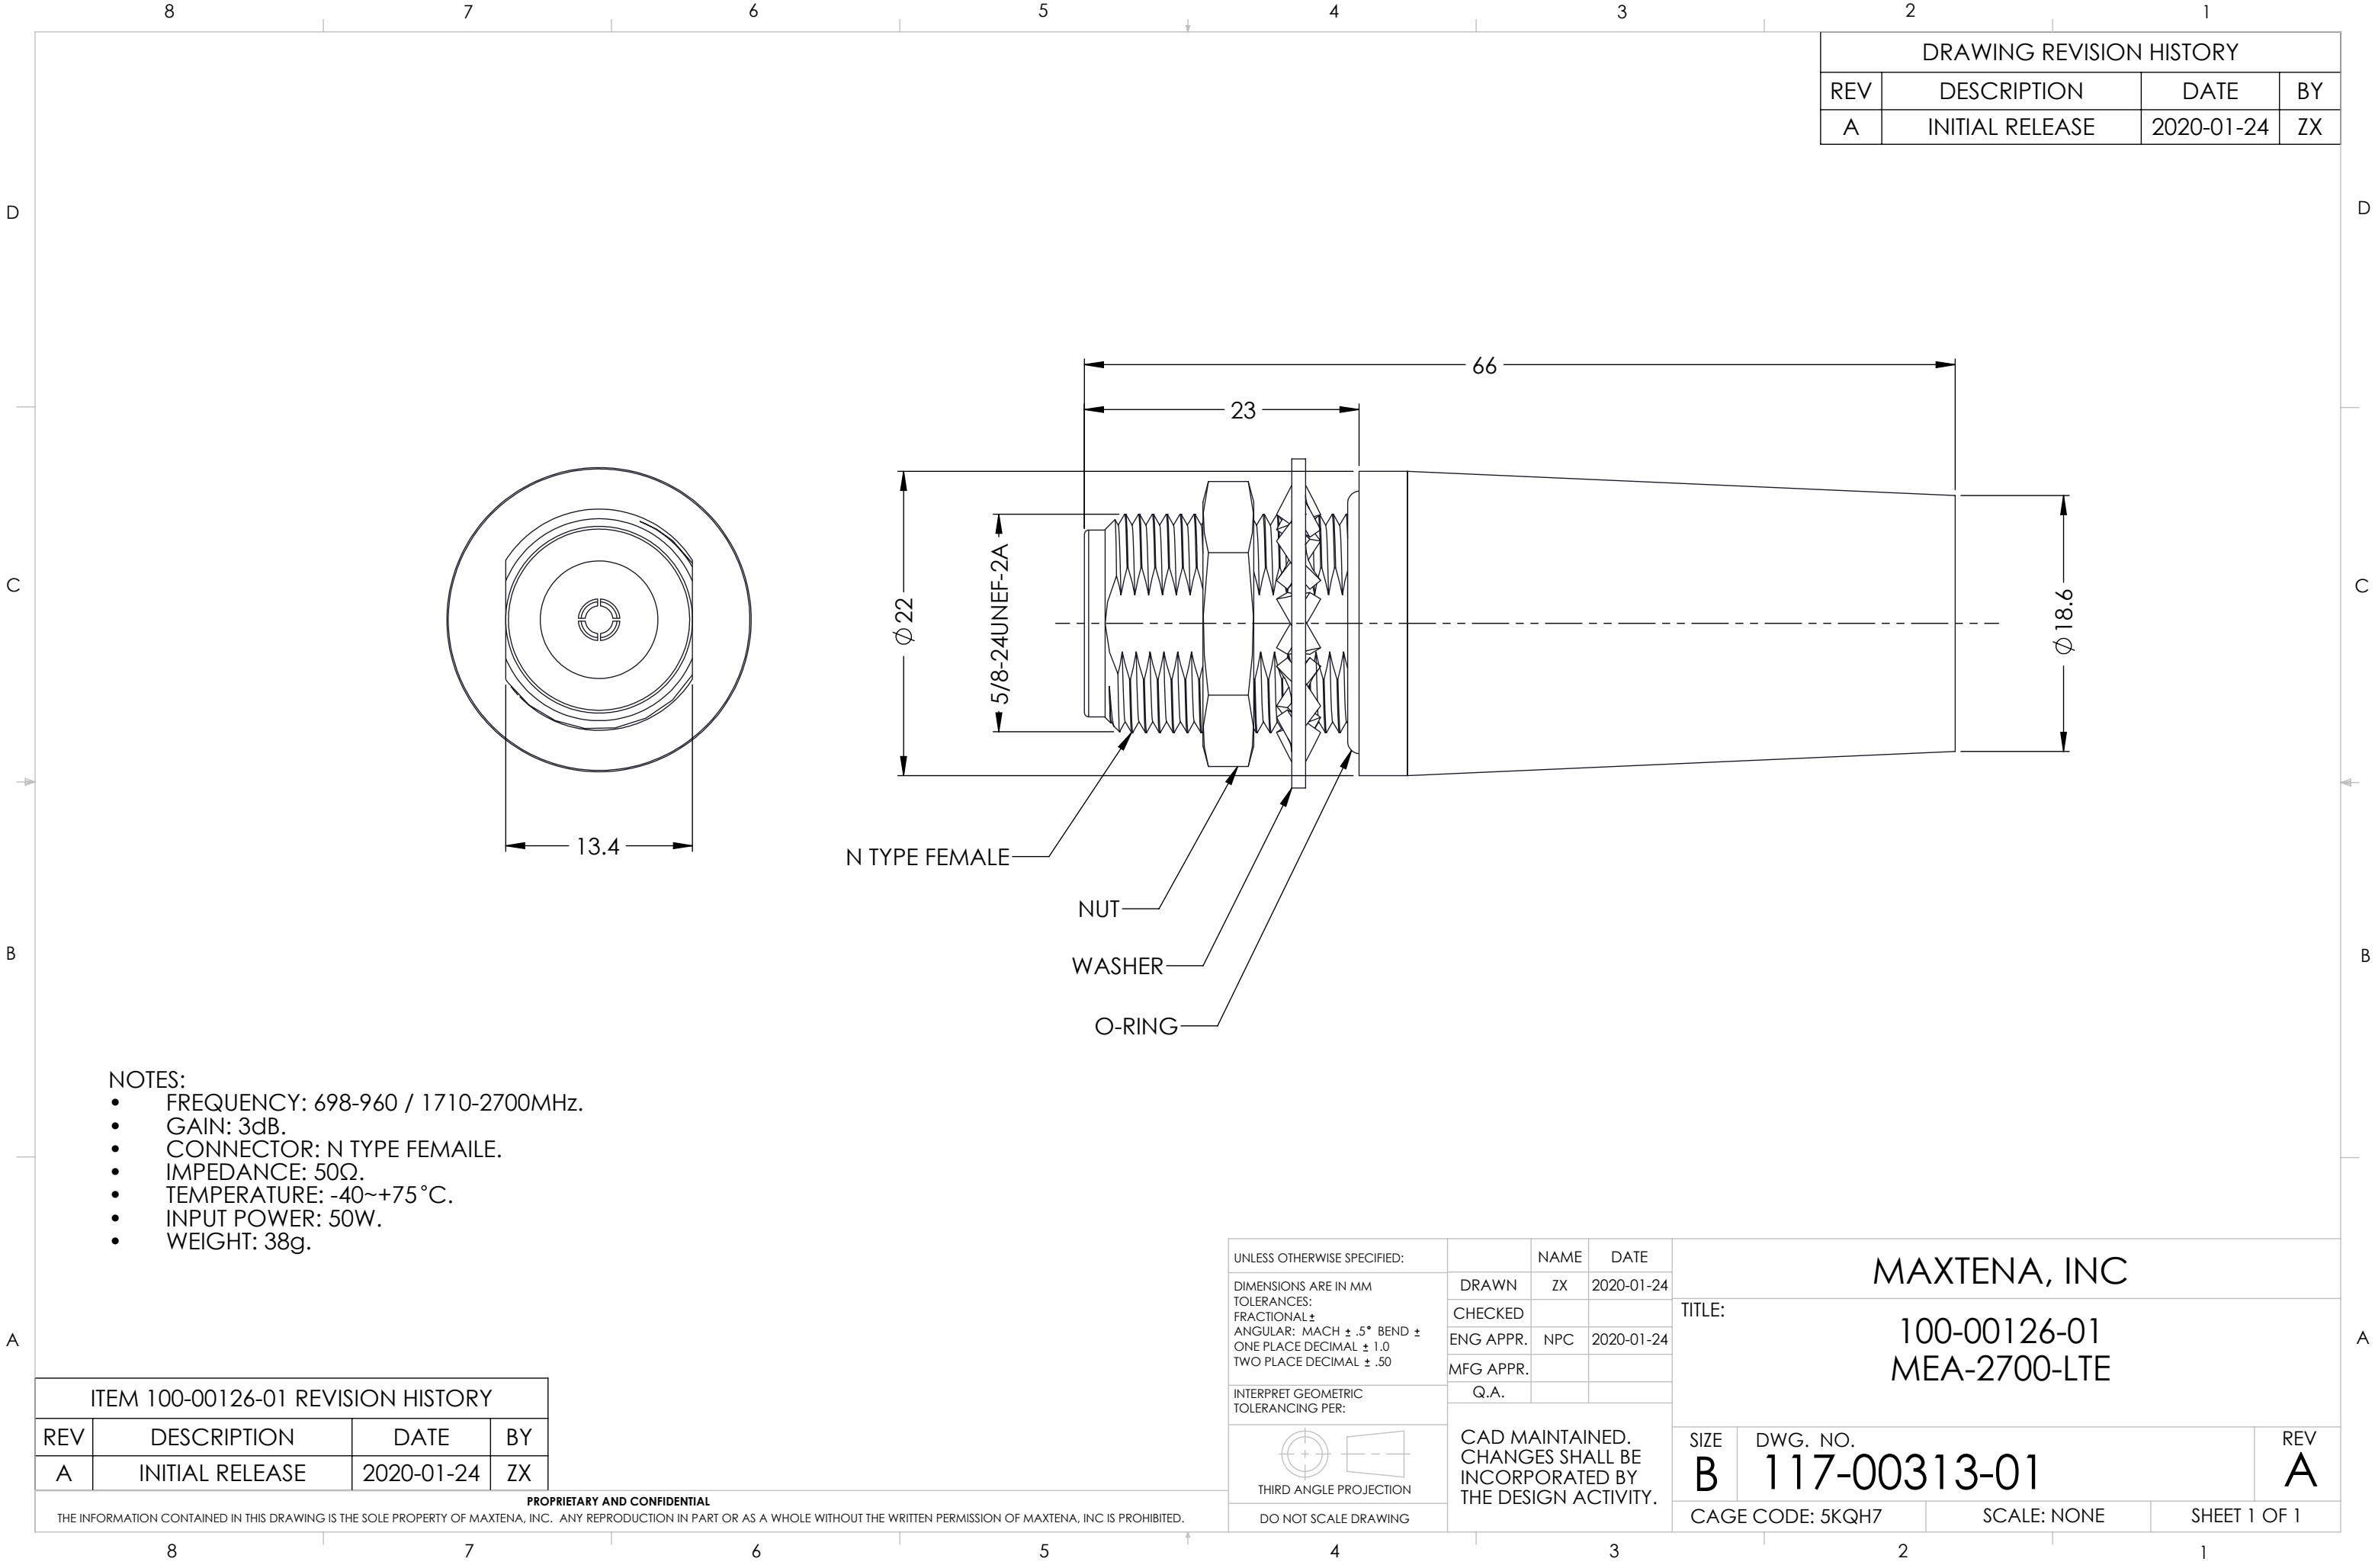

DRAWING REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2020-01-24	ZX

- NOTES:
- FREQUENCY: 698-960 / 1710-2700MHz.
 - GAIN: 3dB.
 - CONNECTOR: N TYPE FEMALE.
 - IMPEDANCE: 50Ω.
 - TEMPERATURE: -40~+75°C.
 - INPUT POWER: 50W.
 - WEIGHT: 38g.

ITEM 100-00126-01 REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2020-01-24	ZX

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MAXTENA, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MAXTENA, INC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE		MAXTENA, INC					
DIMENSIONS ARE IN MM TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± .5° BEND ± ONE PLACE DECIMAL ± 1.0 TWO PLACE DECIMAL ± .50		DRAWN	ZX	2020-01-24		TITLE: 100-00126-01 MEA-2700-LTE					
		CHECKED									
		ENG APPR.	NPC	2020-01-24							
		MFG APPR.									
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.									
 THIRD ANGLE PROJECTION		CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.				SIZE		DWG. NO.		REV	
						B		117-00313-01		A	
DO NOT SCALE DRAWING						CAGE CODE: 5KQH7		SCALE: NONE		SHEET 1 OF 1	