


Terminal, iPo plug-in terminal, 5 clamping points, initiator terminal with LED, 1.5 mm², gray

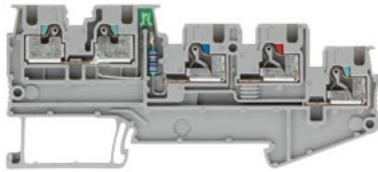

Model	
product brand name	SENTRON
product designation	Actuator terminals
design of the product	For 4-wire LED 24V green
design of LED initiator/actuator terminal	PNP
design of terminal terminal levels internally linked	No
General technical data	
insulation material	thermoplastic
terminal contact spacing	3.5 mm
operating voltage rated value	250 V
Protection class	
combustibility class according to UL 94	V2
Main circuit	
operational current rated value	13.5 A
Appearance	
color	grey
• of the light source	Gray
Product details	
product function infeed function	No
product component	
• required end cover plate	No
• PE connection	No
• shield connection	No
• disconnecter	No
product feature cross-connectable	Yes
Number	
number of terminal levels	4
number of terminal points per terminal level	2
Connections	
connectable conductor cross-section solid	
• minimum	0.14 mm ²
• maximum	1.5 mm ²
connectable conductor cross-section stranded	
• minimum	0.14 mm ²
• maximum	1.5 mm ²
connectable conductor cross-section finely stranded	
• with core end processing minimum	0.14 mm ²
• with core end processing maximum	1.5 mm ²
• without core end processing minimum	0.14 mm ²

• without core end processing maximum	1.5 mm ²
type of connection 1	plug-in terminal connection
type of connection 2	plug-in terminal connection
position of the terminal	top
Mechanical Design	
height	41.5 mm
height with lowest-profile installation	41.5 mm
length	90.8 mm
fastening method	other
Net Weight	8 g
material of the insulating body	Thermoplast

Approvals Certificates

Environment	General Product Approval
--------------------	---------------------------------

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



[Confirmation](#)

General Product Ap- proval	other
---------------------------------------	--------------





[Confirmation](#)



Further information

- Information on the packaging**
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage**
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)**
<https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)**
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WH6004-0FE00>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<https://support.industry.siemens.com/cs/ww/en/ps/8WH6004-0FE00>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH6004-0FE00
- CAx-Online-Generator**
<https://www.siemens.com/cax>
- Tender specifications**
<https://www.siemens.com/specifications>
- Characteristic curves**
[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

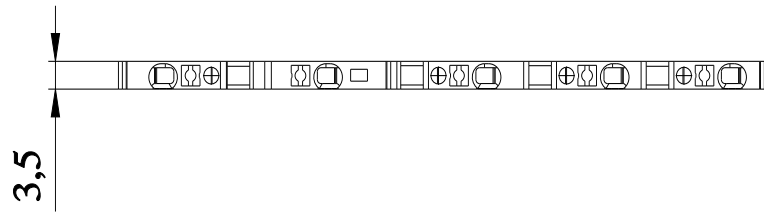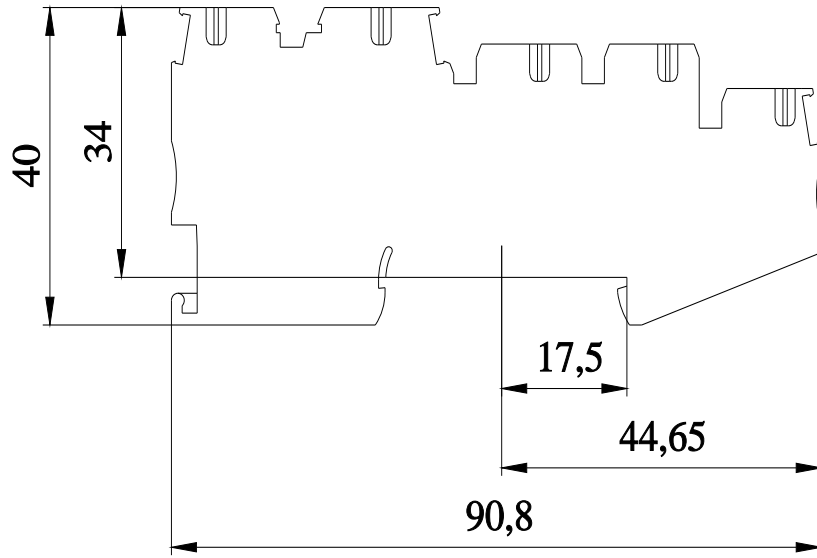

last modified:

8/7/2025 

