

Soft starting device 400 V AC 300-5500W 3PH Overall depth 55 mm



Model	
product brand name	SETRON
product designation	Soft-starting device
design of the product	55 mm
Supply voltage	
operating voltage rated value	
• minimum	230 V
• maximum	230 V
protection class IP	IP20
Dissipation	
power loss [W]	4.6 W
power loss [W] for rated value of the current at AC in hot operating state per pole	4.6 W
Control current	
control supply voltage	
• at AC at 50 Hz rated value minimum	230 V
• at AC at 50 Hz rated value maximum	230 V
• at AC at 60 Hz rated value minimum	230 V
• at AC at 60 Hz rated value maximum	230 V
Product function	
product function motor overload protection	No
Mechanical Design	
height	90 mm
width	105 mm
depth	55 mm
Net Weight	444 g
Environmental conditions	
ambient temperature without derating rated value	55 °C
Approvals Certificates	
Environment	General Product Approval

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

EAC

[Confirmation](#)

CE
EG-Konf.



**UK
CA**

other



Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TT3440>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/5TT3440>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3440
- CAx-Online-Generator
<https://www.siemens.com/cax>
- Tender specifications
<https://www.siemens.com/specifications>
- Characteristic curves
https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

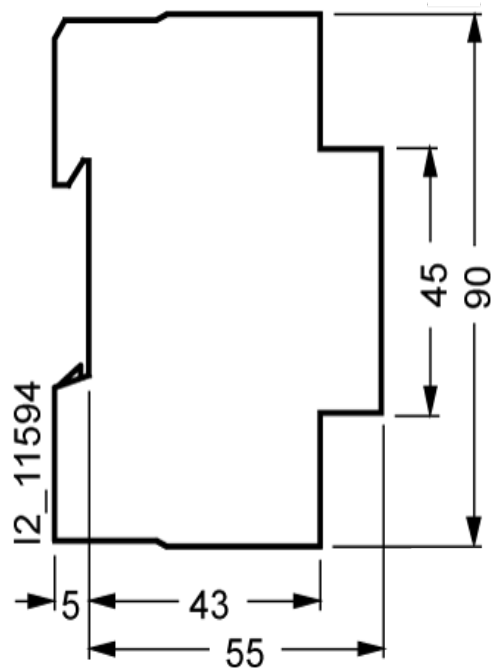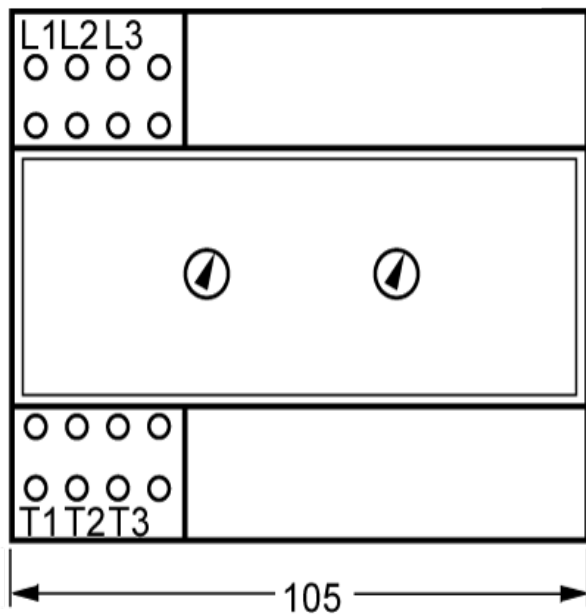

last modified:

4/12/2025

