



accessories: adapter cable for RFID safety switch 3SE63, M12 socket 8-pole at one end, M12 plug 8-pole at the other end, cable 300 mm long. customer-specific, see data sheet.

General technical data	
product brand name	SIRIUS
operational current at 40 °C rated value	2 A
operating voltage rated value	30 V
ambient temperature during operation	-25 ... +85 °C
overvoltage category	2
degree of pollution	3
protection class IP	IP68
Certificates/ approvals	
General Product Approval	other



[Confirmation](#)

[Confirmation](#)



Environment

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SX5600-8SA00-1AK1>

Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SX5600-8SA00-1AK1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SX5600-8SA00-1AK1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SX5600-8SA00-1AK1&lang=en

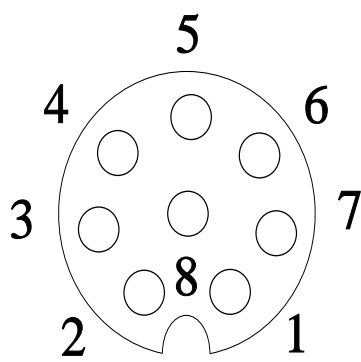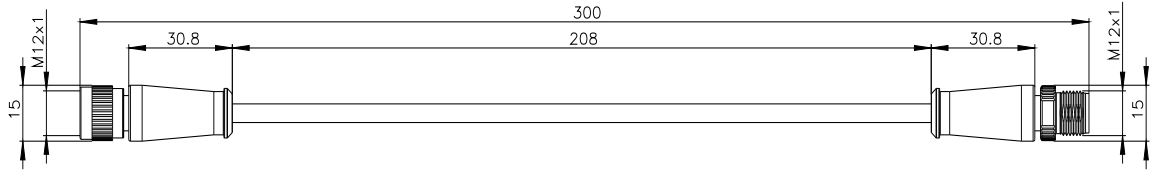

1	→	2
2	→	2
3	→	6
4	→	3
5	→	-
6	→	2
7	→	7
8	→	-

