

Door-coupling rotary operating mechanism Emergency switching-off with tolerance compensation Size 100x 100, Shaft 12x 12, 300 mm, 0-I, Complete unit Handle size 200 mm Accessory for 3KD size 5, 3KF size 5



Net Weight 1.357 kg

Approvals Certificates

Environment General Product Approval

[Environmental Confirmations](#)



[Confirmation](#)



General Product Approval Test Certificates Maritime application other



[Type Test Certificates/Test Report](#)



[Confirmation](#)



[Miscellaneous](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=8UD1161-4AF25>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8UD1161-4AF25>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mifb=8UD1161-4AF25

CAX-Online-Generator



<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

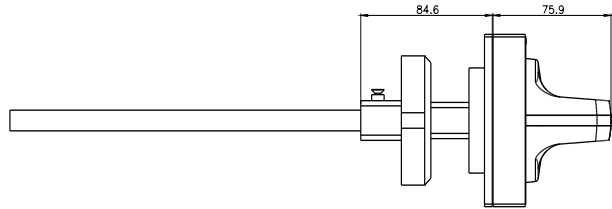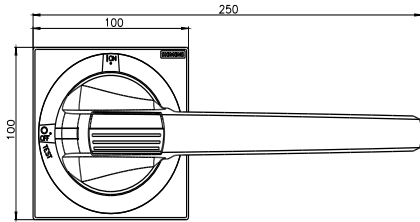

last modified:

4/4/2025 