



plug-in socket for PT relay, 4 changeover contacts, with logical isolation, spring-loaded terminal (push-in)

product brand name	SIRIUS
product type designation	LZS
<b>General technical data</b>	
display version LED	No
switching behavior	monostable
reference code according to IEC 81346-2	U
Substance Prohibitance (day/month/year)	05/01/2012
Net Weight	0.068 kg
<b>Switching Function</b>	
design of the switching function	changeover switch
<b>Mechanical data</b>	
product component plug-in socket	Yes
design of the snap-on socket base	Socket with logic isolation
design of the relay operating mechanism	poled
<b>Auxiliary circuit</b>	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
<b>Connections/ Terminals</b>	
product function removable terminal	No
type of electrical connection	spring-loaded terminals
type of connectable conductor cross-sections	<ul style="list-style-type: none"> <li>• solid 1x (0,75 ... 1,5), 2x (0,75 ... 1,0), 2x 1,5</li> <li>• finely stranded with core end processing 1x (0,75 ... 1,5), 2x 0,75</li> <li>• finely stranded without core end processing 1x (0,75 ... 1,5), 2x (0,75 ... 1,0), 2x 1,5</li> <li>• for AWG cables solid 1x (18 ... 16), 2x (18 ... 16)</li> <li>• for AWG cables stranded 1x (18 ... 16), 2x (18 ... 16)</li> </ul>
connectable conductor cross-section	<ul style="list-style-type: none"> <li>• solid 0.75 ... 1.5 mm<sup>2</sup></li> <li>• finely stranded with core end processing 0.75 ... 1.5 mm<sup>2</sup></li> <li>• finely stranded without core end processing 0.75 ... 1.5 mm<sup>2</sup></li> </ul>
AWG number as coded connectable conductor cross section	<ul style="list-style-type: none"> <li>• solid 18 ... 16</li> <li>• stranded 18 ... 16</li> </ul>
<b>Installation/ mounting/ dimensions</b>	
mounting position	any
fastening method	snap-on mounting
height	98 mm

width	28 mm
depth	48.3 mm
<b>Ambient conditions</b>	
ambient temperature	
• during operation	-40 ... +70 °C
• during storage	-25 ... +70 °C
• during transport	-25 ... +70 °C

**Approvals Certificates**

Environment	General Product Approval	Maritime application
-------------	--------------------------	----------------------

[Environmental Con-  
firmations](#)



**other**

[Confirmation](#)

[Confirmation](#)



**Further information**

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:PT7874P>

Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:PT7874P>





Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT7874P>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=LZS:PT7874P&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=LZS:PT7874P&lang=en)

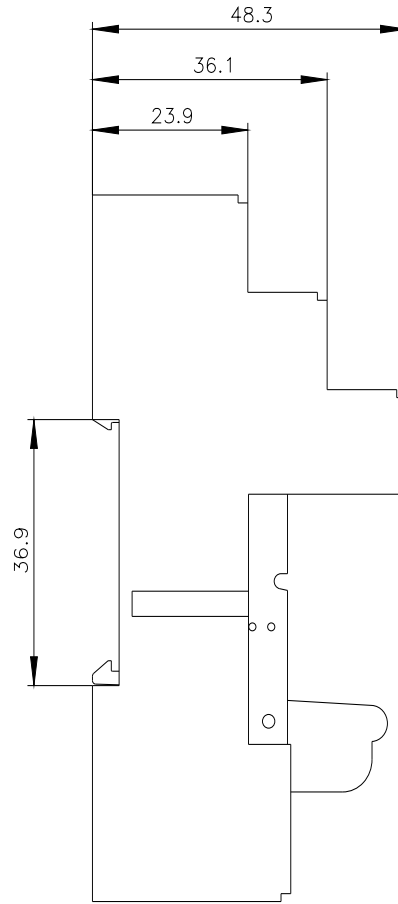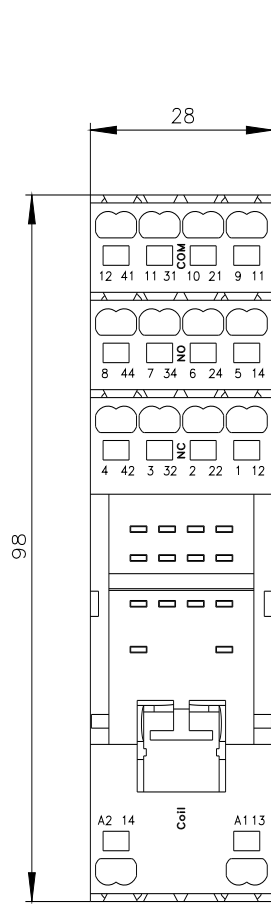

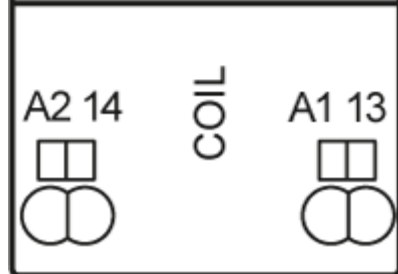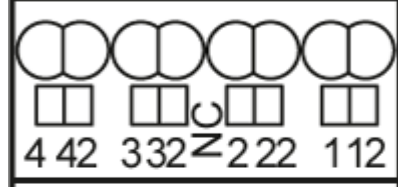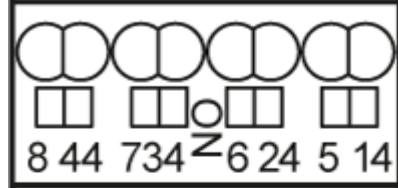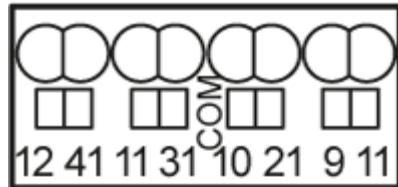

NSB0\_01761a

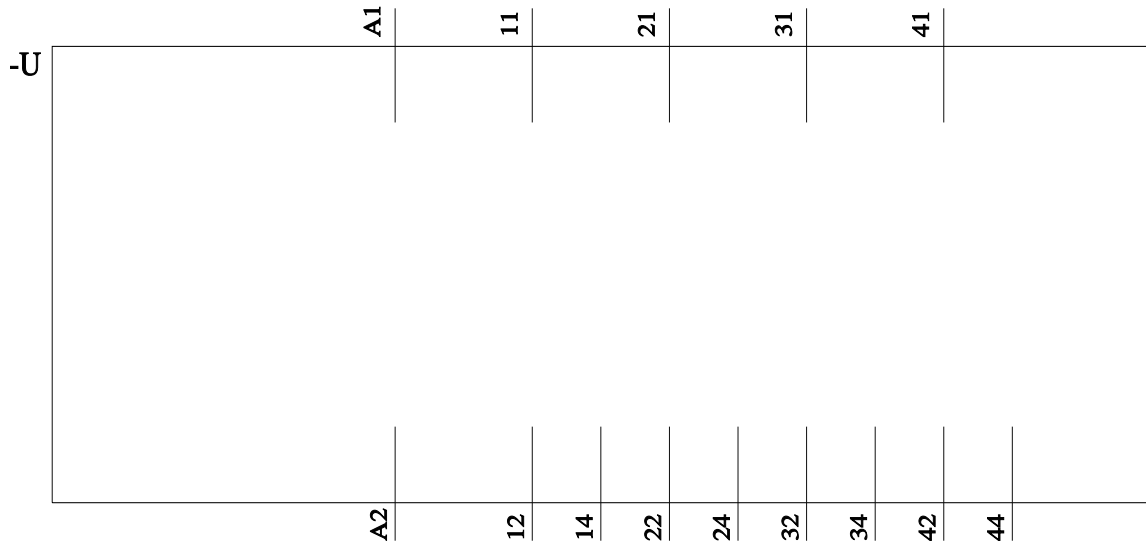

last modified:

10/22/2025 