

6W AC to DC Converter - PCB Mount

multicompPRO

**RoHS
Compliant**



Features

- Universal Input : 85 - 264V AC/100 - 370V DC
- Operating temperature range: -40°C to +70°C
- High isolation voltage up to 4K V AC
- Regulated output, Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- High efficiency, high reliability
- Plastic case, meets UL94V-0
- EMI performance meets CISPR32 / EN55032 CLASS B
- IEC62368, UL62368, EN62368 approval



This is a compact size power converter. It features universal input voltage, taking both DC and AC input voltage, low power consumption, high efficiency, high reliability, safer isolation. It offers good EMC performance, and is UL & CE certified, and widely used in industrial, electricity, instruments, telecommunication and civil applications.

Note: Please refer to Design Reference when module being used in a bad EMC environment.

Selection Guide

Certification	Part No.*	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 230V AC (%) Typ.	Max. Capacitive Load (μF)
UL/CE/CB	MP-LDE06-20B03	4.1W	3.3V/1250mA	70	4000
	MP-LDE06-20B05	6W	5V/1200mA	76	
	MP-LDE06-20B09		9V/660mA	74	1000
	MP-LDE06-20B12		12V/500mA	77	820
	MP-LDE06-20B24		24V/250mA	80	330

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Voltage Range	AC input	85	-	264	V DC	
	DC input	100		370		
Input Frequency		47		63	Hz	
Input Current	115V AC	-		0.15	A	
	230V AC			0.1		
Inrush Current	115V AC	-	10	-		
	230V AC		20	-		
Recommended External Input Fuse		1A/250V, slow fusing, necessary				
Hot Plug		Unavailable				

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

6W AC to DC Converter - PCB Mount

multicompPRO

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	3.3V output	-	±3	-	%
	Other output		±2		
Line Regulation	Full load		±0.5		
Load Regulation	0%-100% load		±1		
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		50	100	mV
Temperature Drift Coefficient			±0.02	-	%/°C
Short Circuit Protection		Hiccup, Continuous, Self-Recovery			
Over-current Protection		≥110%Io Self-Recovery			
Over-voltage Protection	3.3/5V DC output	≤7.5V DC			
	9V DC output	≤15V DC			
	12/15V DC output	≤20V DC			
	24V DC output	≤30V DC			
Minimum Load		0	-	-	%
Hold-up Time	115V AC input	-	8		ms
	230V AC input		60		

Note: * Ripple and noise are measured by “parallel cable” method, please see AC-DC Converter Application Notes for specific operation.

General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output	Test time: 1min	4000	-	-	V AC
Operating Temperature			-40	-	+70	°C
Storage Temperature					+105	
Storage Humidity			-	-	95	%RH
Welding Temperature		Wave-soldering	260 ± 5°C; time: 5 - 10s			
		Manual-welding	360 ± 10°C; time: 3 - 5s			
Switching Frequency			-	100	-	kHz
Power Derating		-40°C to -25°C	2.66	-	-	%/°C
		+55°C to +70°C				
		85V AC to 100V AC	1			%/V AC
Safety Standard			IEC62368/EN62368/UL62368			
Safety Certification			IEC62368/EN62368/UL62368			
Safety Class			CLASS II			
MTBF			MIL-HDBK-217F@25°C > 300,000 h			



6W AC to DC Converter - PCB Mount

multicompPRO

Physical Specifications		
Casing Material		Black flame-retardant and heat-resistant plastic (UL94 V-0)
Dimensions	DIP	50.8mm × 25.4mm × 15.36mm
	A2S chassis mounting	76mm × 31.5mm × 24.16mm
	A4S Din-Rail mounting	76mm × 31.5mm × 28.76mm
Weight	DIP	31g (Typ.)
	A2S chassis mounting	52 g (Typ.)
	A4S Din-Rail mounting	70 g (Typ.)
Cooling method		Free air convection

EMC Specifications				
EMI	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
EMS	ESD	IEC/EN61000-4-2	Contact ±6KV/ Air ±8KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	± 2KV	perf. Criteria B
		IEC/EN 61000-4-4	±4KV (See Fig. 2 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN 61000-4-5	line to line ±1 KV	perf. Criteria B
		IEC/EN 61000-4-5	line to line ±2 KV/line to ground ±4 KV (See Fig. 2 for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations	IEC/EN61000-4-11	0%,70%	perf. Criteria B

Product Characteristic Curve

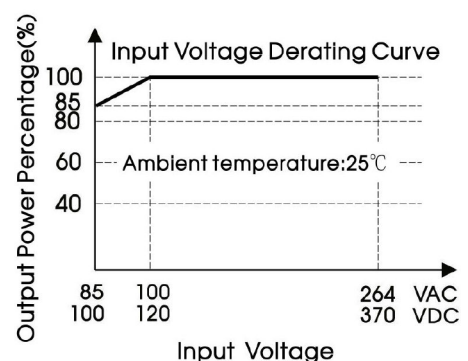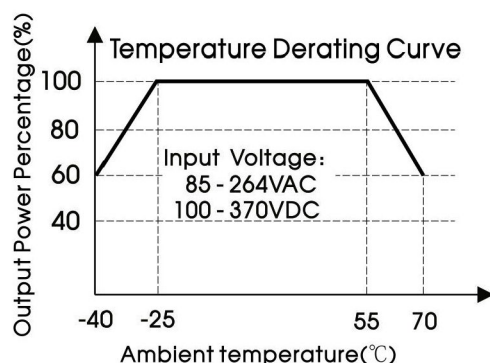

Note: ①When input 85-100VAC/100-120VDC, it need to be voltage derated on basis of temperature derating;



②This product is suitable for use in natural air cooling environments, if in a closed environment, please contact our company's FAE.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

6W AC to DC Converter - PCB Mount

multicompPRO

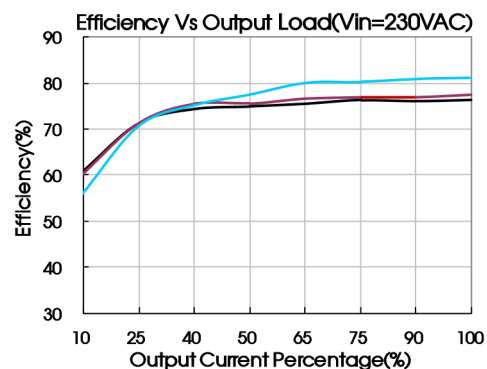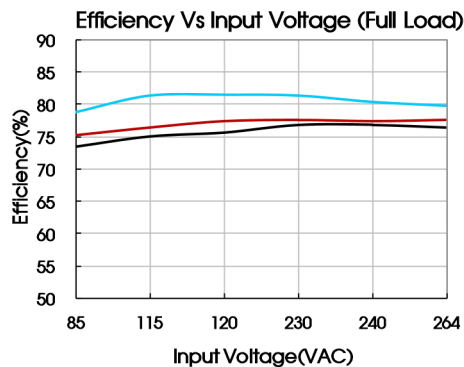

Design Reference

1. Typical application

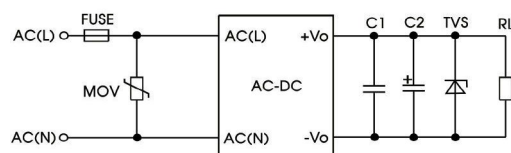


Fig. 1

Part No.	C1(μF)	C2(μF)	FUSE	MOV	TVS tube
MP-LDE06-20B03	1	220	1A/250V, slow fusing, necessary	S14K350	SMBJ7.0A
MP-LDE06-20B05					SMBJ12A
MP-LDE06-20B09		100			SMBJ20A
MP-LDE06-20B12					SMBJ30A
MP-LDE06-20B24		47			

Note:

Output filtering capacitor C2 is a electrolytic capacitor, it is recommended to use high frequency and low impedance electrolytic capacitor. For capacitance and current of capacitor please refer to manufacture's datasheet. Output capacitor voltage reduced to at least 80%. C1 is ceramic capacitor, which is used to filter high-frequency noise. TVS is a recommended component to protect post-circuits if converter fails.

2. EMC solution-recommended circuit

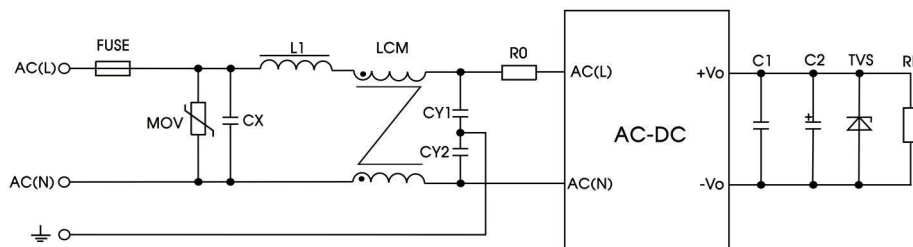



Fig 2

6W AC to DC Converter - PCB Mount

multicompPRO

Element model	Recommended value
MOV	S14K350
CX	0.1 μ F/275V AC
L1	4.7 μ H/2A
CY1	1nF/400V AC
CY2	1nF /400V AC
LCM	2.2mH, recommended to use MORNSUN's FL2D-10-222
FUSE	2A/250V, slow fusing, necessary
R0	33 Ω /3W

Dimensions and Recommended Layout

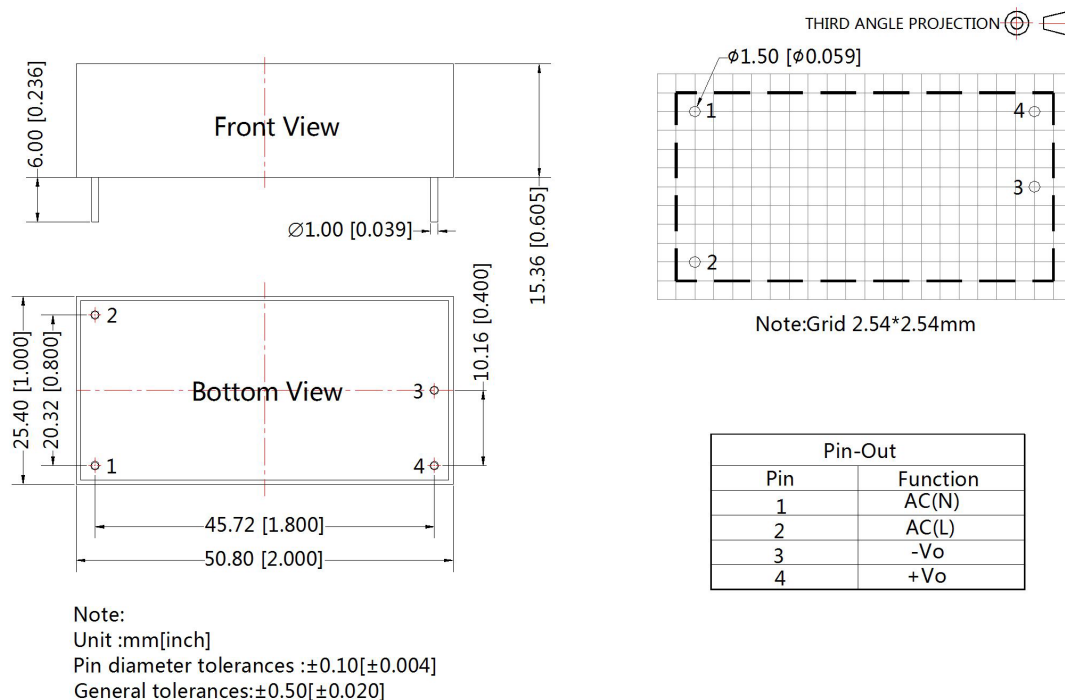

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO