



Figure similar

auxiliary switch, 1 NO + 1 NC, low power for miniature circuit breakers 5SL, 5SY, 5SP, incorporated switch 5TL1, RCBO 5SU1 (without 5SU1...FP/FR), RCCB 5SV (for 5SU1, handle coupler 5ST3805-1 is required)

Model	
product brand name	SENTRON
product designation	auxiliary switches
design of the product	Mountable
design of the product factory mounted	No
electrical endurance (operating cycles) typical	10 000
Voltage	
insulation voltage rated value	50 V
surge voltage resistance rated value	1 kV
Current	
operational current at DC rated value	0.001 ... 0.1 A
Supply voltage	
supply voltage at DC rated value	
• minimum	5 V
operating voltage	
• rated value	30 V
• at DC rated value minimum	5 V
• at DC rated value maximum	30 V
protection class IP	IP20
Breaking Capacity	
switching capacity current rated value	0 A
Control current	
type of voltage of control voltage	DC
Product details	
product component	
• auxiliary switch	Yes
number of fault signal contacts	0
number of NC contacts	1
number of NO contacts	1
number of CO contacts	0
product extension can be mounted	Universal
product extension	auxiliary switch
Connections	
connectable conductor cross-section	
• minimum	0.5 mm ²
• maximum	2.5 mm ²
AWG number as coded connectable conductor cross section	

• minimum	24
• maximum	12
tightening torque with screw-type terminals	
• maximum	0.5 N·m

Mechanical Design

height	90 mm
width	9 mm
depth	70 mm
number of modular width units	1
Net Weight	61 g

Environmental conditions

ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage minimum	-40 °C

Approvals Certificates

Environment	General Product Approval
--------------------	---------------------------------

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



General Product Approval	Maritime application
---------------------------------	-----------------------------

[Miscellaneous](#)



[Confirmation](#)



Maritime application	other	Railway
-----------------------------	--------------	----------------



[Confirmation](#)






[Miscellaneous](#)

[Special Test Certifi-
cate](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3013>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/5ST3013>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3013
- CAX-Online-Generator
<https://www.siemens.com/cax>
- Tender specifications
<https://www.siemens.com/specifications>
- Characteristic curves
[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

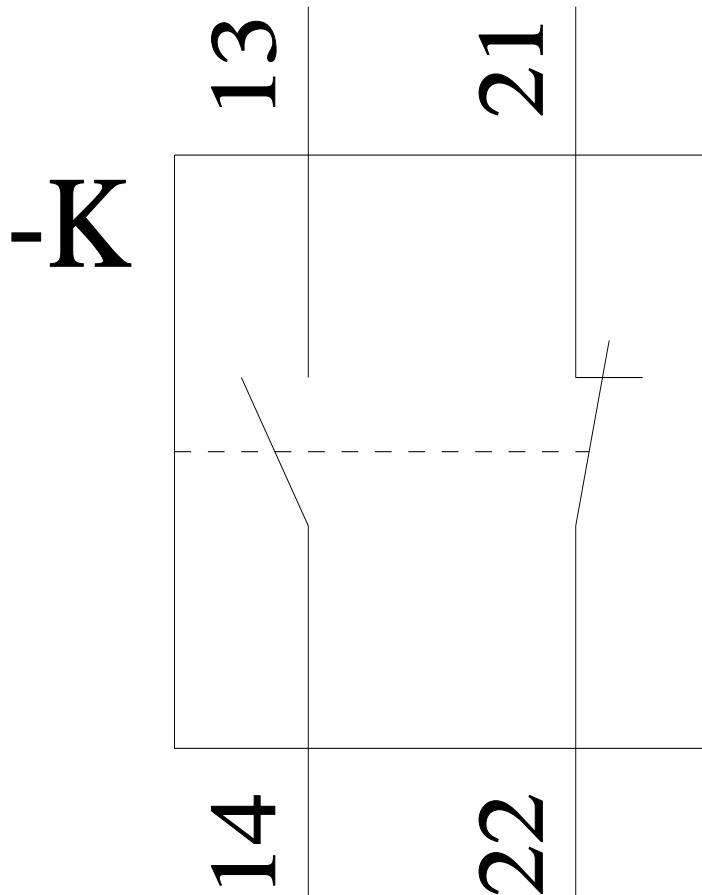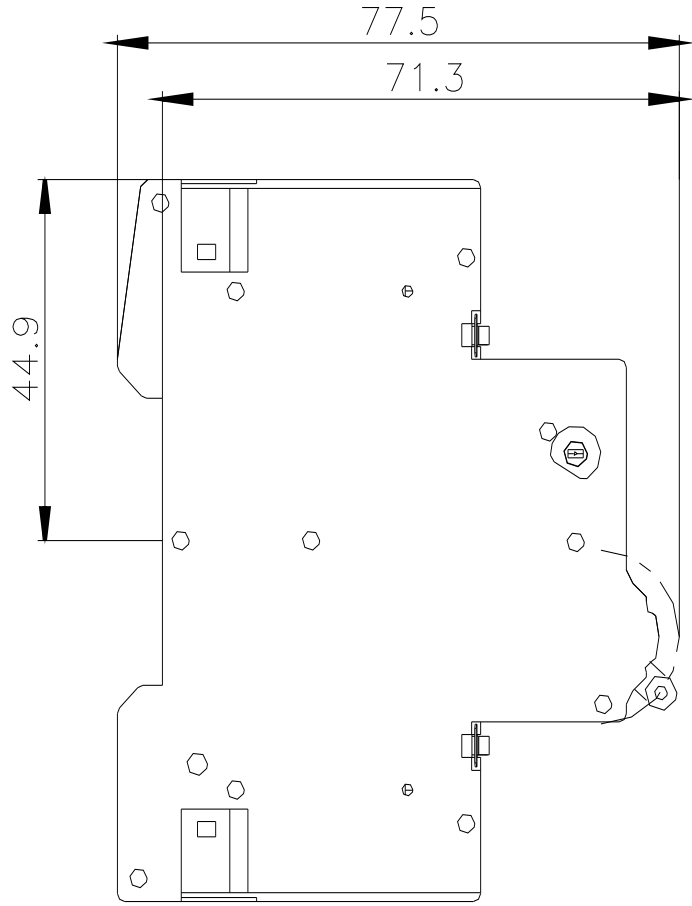

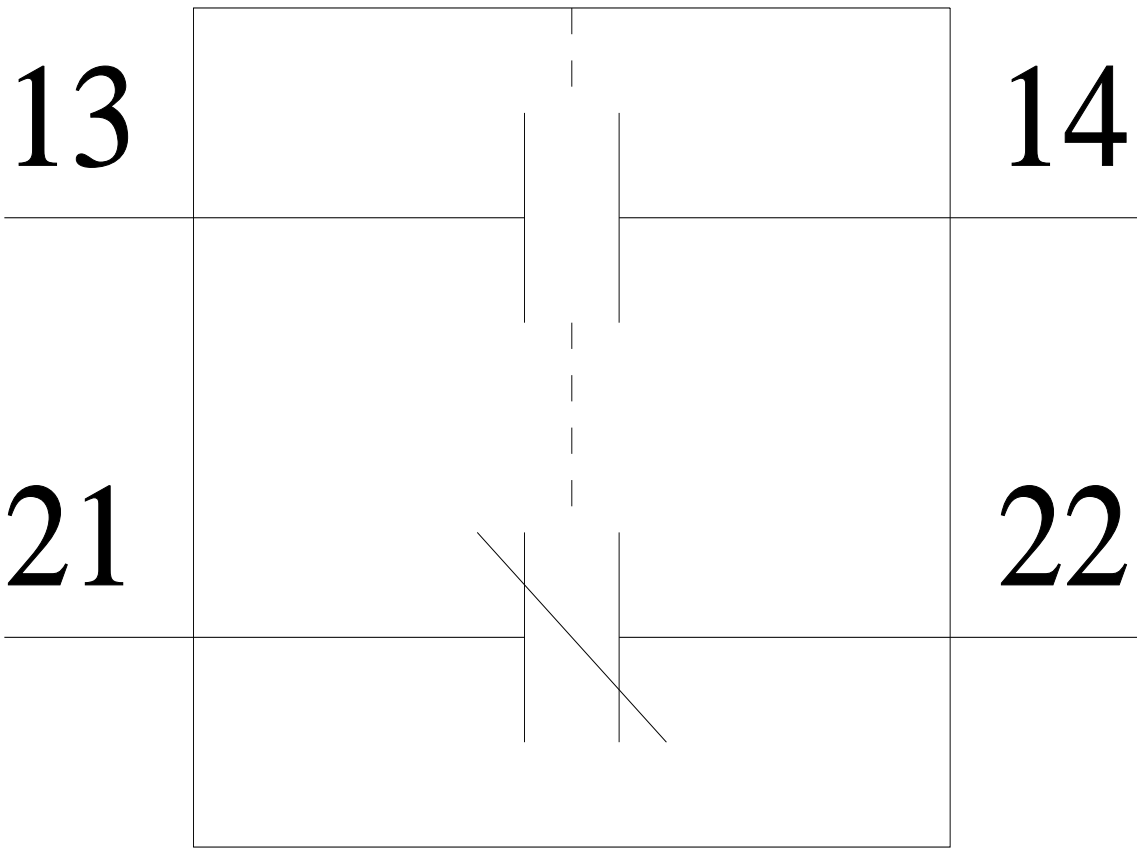

last modified:

5/5/2026 

