



fault signal contact with test button 1 NO + 1 NC for miniature circuit breakers 5SL, 5SY, 5SP RCBO 5SU1, RCCB 5SV (required for 5SU1 handle coupler 5ST3805-1)

Model	
product brand name	SENTRON
product designation	Fault signal contact
design of the product	Mountable
design of the product factory mounted	No
electrical endurance (operating cycles) typical	10 000
Voltage	
insulation voltage rated value	440 V
Current	
operational current at DC rated value	0.05 A
Supply voltage	
operating voltage	
• at AC rated value minimum	24 V
• at DC rated value minimum	24 V
protection class IP	IP20
Control current	
type of voltage of control voltage	AC/DC
Product details	
product component	
• fault signal contact	Yes
• auxiliary switch	No
number of fault signal contacts	0
number of NC contacts	1
number of NO contacts	1
number of CO contacts	0
product extension can be mounted	Universal
product extension	Fault signal contact
Connections	
connectable conductor cross-section	
• minimum	0.5 mm ²
• maximum	2.5 mm ²
AWG number as coded connectable conductor cross section	
• minimum	24
• maximum	12
tightening torque with screw-type terminals	
• maximum	1 N·m
Mechanical Design	
height	90 mm

width	9 mm
depth	70 mm
number of modular width units	1
Net Weight	71 g

Environmental conditions

standard	IEC/EN60947-5-1; IEC/EN62019; GB14048.5
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage minimum	-40 °C

Approvals Certificates

Environment	General Product Approval
-------------	--------------------------

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



[Miscellaneous](#)



General Product Approval	other	Railway
--------------------------	-------	---------

[Confirmation](#)



[Confirmation](#)

[Special Test Certific-
ate](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3020-2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3020-2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3020-2

CAX-Online-Generator



<https://www.siemens.com/cax>


Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

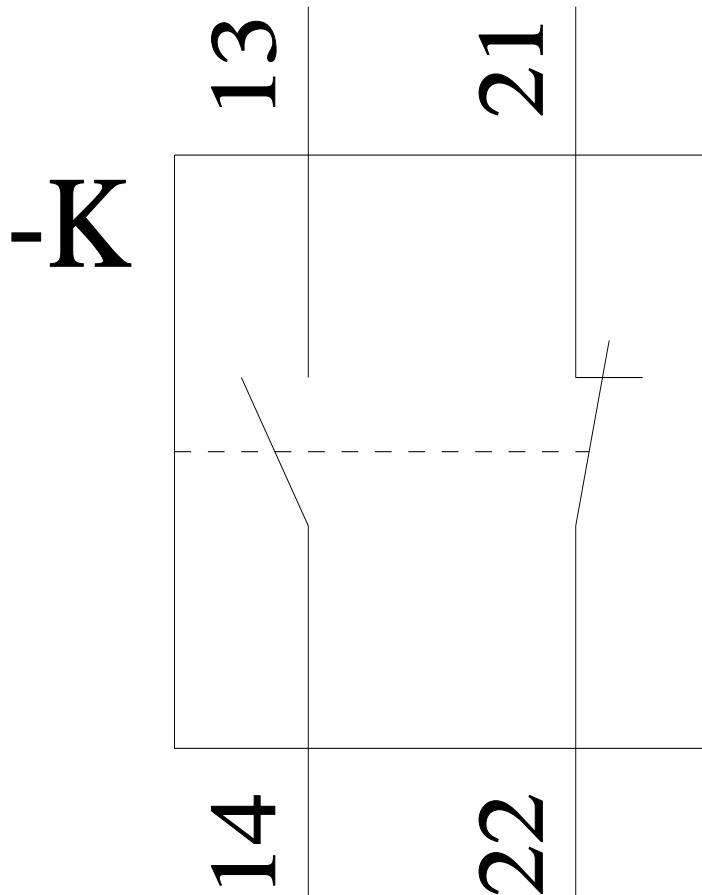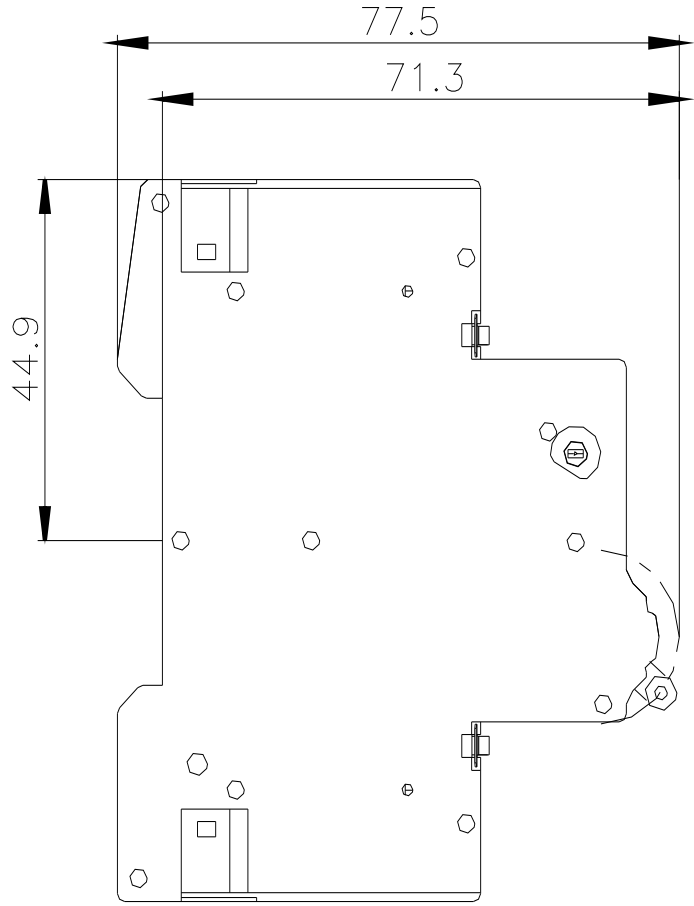

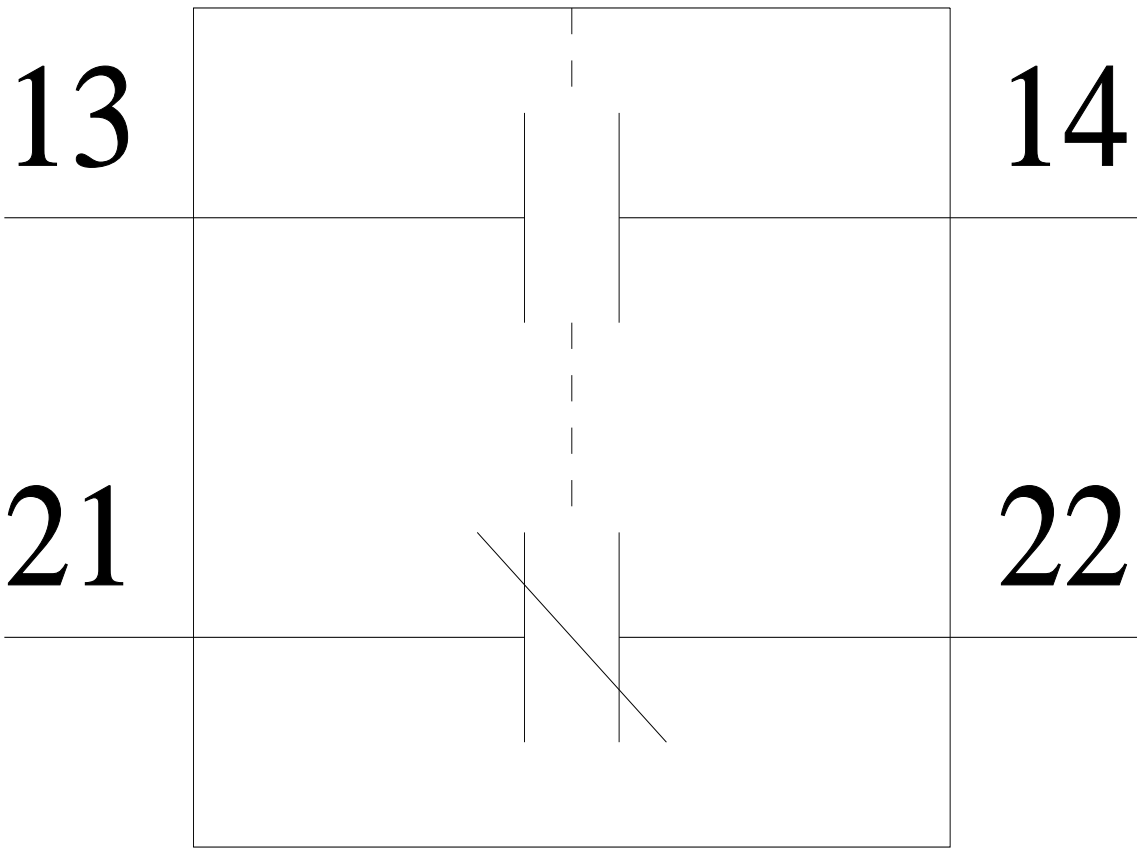

last modified:

5/5/2026 

