



auxiliary switch, group half module

Model	
product brand name	SENTRON
product designation	Remote control switch
design of the product	auxiliary switch, group
latching relay design	Mechanical for group control
General technical data	
galvanic isolation between magnet coil and contact	Yes
switching voltage of the contacts at AC minimum	10 V
switching current at AC per contact minimum	100 mA
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
Protection class	
protection class IP	IP20
Breaking Capacity	
switching capacity current	16 A
• at cos phi 0.6	
Product details	
number of NC contacts	0
number of NO contacts	0
number of CO contacts	0
Product function	
product function	Yes
• direct operation	
• communication function	
• other measurement function	No
pulse duration minimum	50 ms
Mechanical Design	
height	90 mm
width	9 mm
width of opening of the contacts	1.2 mm
depth	73 mm
mounting height	90 mm
installation depth	70 mm
number of modular width units	0.5
fastening method	DIN rail
mounting position	Horizontal and vertical
Net Weight	46 g

## Environmental conditions

<b>ambient temperature during operation</b>	
• minimum	-25 °C
• maximum	70 °C
<b>ambient temperature with relative humidity 95% according to DIN 50015</b>	55 °C

## Approvals Certificates

Environment	General Product Approval
<a href="#">Environmental Confirmations</a>	<a href="#">Confirmation</a>
<a href="#">Environmental Confirmations</a>	
	 EG-Konf.
	

## other

[Confirmation](#)



## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TT4932>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TT4932>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT4932](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT4932)

### CAX-Online-Generator



<https://www.siemens.com/cax>

### Tender specifications

<https://www.siemens.com/specifications>

### Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

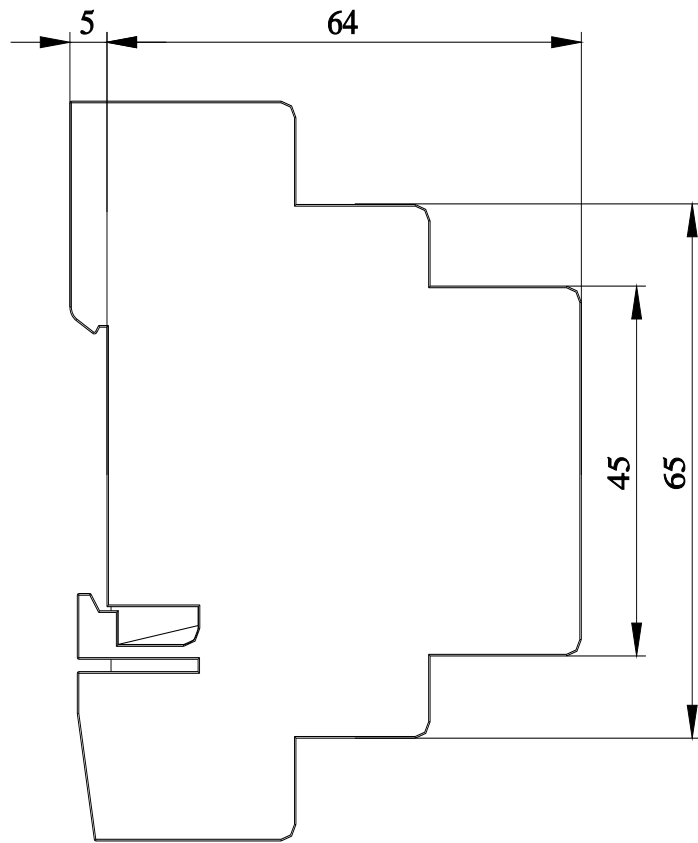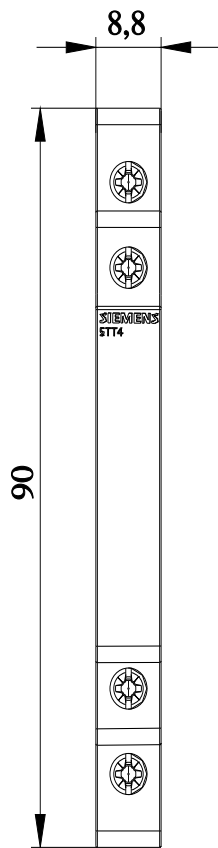

last modified:

6/5/2025 