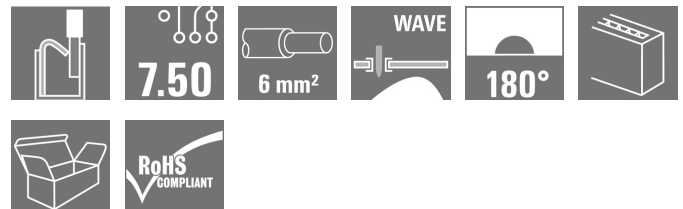


**OMNIMATE Power - series LL**  
**LLFS 7.50/05/180V 5.0SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Product image**

similar to illustration

**The sturdy, direct connection for extreme current and voltage requirements in all power electronics applications such as solar inverters, frequency converters, servo-controllers and power supplies.**

**General ordering data**

|              |                                                                                                                                                                            |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type         | LLFS 7.50/05/180V 5.0SN BK BX                                                                                                                                              |
| Order No.    | <a href="#">2491650000</a>                                                                                                                                                 |
| Version      | Printed circuit board terminals, 7.50 mm, Number of poles: 5, 180°, Solder pin length (l): 5 mm, tinned, black, PUSH IN without actuator, Clamping range, max.: 6 mm², Box |
| GTIN (EAN)   | 4050118607826                                                                                                                                                              |
| Qty.         | 50 pc(s).                                                                                                                                                                  |
| Product data | IEC: 1000 V / 41 A / 0.5 - 6 mm²<br>UL: 600 V / 37 A / AWG 24 - AWG 8                                                                                                      |
| Packaging    | Box                                                                                                                                                                        |

Creation date September 9, 2020 11:08:05 AM CEST

## OMNIMATE Power - series LL LLFS 7.50/05/180V 5.0SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

### Technical data

#### Dimensions and weights

|                          |            |                 |            |
|--------------------------|------------|-----------------|------------|
| Width                    | 46.8 mm    | Width (inches)  | 1.843 inch |
| Height                   | 29.15 mm   | Height (inches) | 1.148 inch |
| Height of lowest version | 24.15 mm   | Depth           | 18.5 mm    |
| Depth (inches)           | 0.728 inch | Net weight      | 18.01 g    |

#### System parameters

|                                            |                            |                                              |                          |
|--------------------------------------------|----------------------------|----------------------------------------------|--------------------------|
| Product family                             | OMNIMATE Power - series LL | Wire connection method                       | PUSH IN without actuator |
| Mounting onto the PCB                      | THT solder connection      | Conductor outlet direction                   | 180°                     |
| Pitch in mm (P)                            | 7.5 mm                     | Pitch in inches (P)                          | 0.295 inch               |
| Number of poles                            | 5                          | Fitted by customer                           | No                       |
| Solder pin length (l)                      | 5 mm                       | Solder pin dimensions                        | d = 1.5 mm               |
| Solder eyelet hole diameter (D)            | 2 mm                       | Solder eyelet hole diameter tolerance (D)+   | 0,1 mm                   |
| Number of solder pins per pole             | 1                          | Stripping length                             | 12 mm                    |
| L1 in mm                                   | 37.5 mm                    | L1 in inches                                 | 1.476 inch               |
| Touch-safe protection acc. to DIN VDE 0470 | IP 20                      | Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch   |

#### Material data

|                                      |                      |                             |        |
|--------------------------------------|----------------------|-----------------------------|--------|
| Insulating material                  | Wemid (PA)           | Colour                      | black  |
| Colour chart (similar)               | RAL 9011             | Insulating material group   | I      |
| Insulation strength                  | $\geq 10^8 \Omega$   | UL 94 flammability rating   | V-0    |
| Contact material                     | E-Cu                 | Contact surface             | tinned |
| Layer structure of solder connection | 4...10 $\mu$ Sn matt | Storage temperature, min.   | -40 °C |
| Storage temperature, max.            | 70 °C                | Operating temperature, min. | -40 °C |
| Operating temperature, max.          | 120 °C               |                             |        |

#### Conductors suitable for connection

|                                                                      |                      |
|----------------------------------------------------------------------|----------------------|
| Clamping range, min.                                                 | 0.25 mm <sup>2</sup> |
| Clamping range, max.                                                 | 6 mm <sup>2</sup>    |
| Wire connection cross section AWG, min.                              | AWG 24               |
| Wire connection cross section AWG, max.                              | AWG 8                |
| Solid, min. H05(07) V-U                                              | 0.5 mm <sup>2</sup>  |
| Solid, max. H05(07) V-U                                              | 6 mm <sup>2</sup>    |
| Flexible, min. H05(07) V-K                                           | 0.5 mm <sup>2</sup>  |
| Flexible, max. H05(07) V-K                                           | 6 mm <sup>2</sup>    |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.25 mm <sup>2</sup> min. |                      |
| w. plastic collar ferrule, DIN 46228 pt 4, 6 mm <sup>2</sup> max.    |                      |
| w. wire end ferrule, DIN 46228 pt 1, min.                            | 0.25 mm <sup>2</sup> |
| w. wire end ferrule, DIN 46228 pt 1, max.                            | 6 mm <sup>2</sup>    |

**OMNIMATE Power - series LL**  
**LLFS 7.50/05/180V 5.0SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

|                                        |                                                                                                                                                                        |                              |                             |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------------------------|
| Clampable conductor                    | Cross-section for conductor connection                                                                                                                                 | Type                         | fine-wired                  |
|                                        |                                                                                                                                                                        | nominal                      | 0.5 mm <sup>2</sup>         |
| wire end ferrule                       |                                                                                                                                                                        | Stripping length             | nominal 14 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H0.5/18 OR</a>  |
| Cross-section for conductor connection |                                                                                                                                                                        | Type                         | fine-wired                  |
|                                        |                                                                                                                                                                        | nominal                      | 1 mm <sup>2</sup>           |
| wire end ferrule                       |                                                                                                                                                                        | Stripping length             | nominal 15 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H1.0/18 GE</a>  |
| Cross-section for conductor connection |                                                                                                                                                                        | Type                         | fine-wired                  |
|                                        |                                                                                                                                                                        | nominal                      | 1.5 mm <sup>2</sup>         |
| wire end ferrule                       |                                                                                                                                                                        | Stripping length             | nominal 15 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H1.5/18D SW</a> |
|                                        |                                                                                                                                                                        | Stripping length             | nominal 12 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H1.5/12</a>     |
| Cross-section for conductor connection |                                                                                                                                                                        | Type                         | fine-wired                  |
|                                        |                                                                                                                                                                        | nominal                      | 0.75 mm <sup>2</sup>        |
| wire end ferrule                       |                                                                                                                                                                        | Stripping length             | nominal 14 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H0.75/18 W</a>  |
| Cross-section for conductor connection |                                                                                                                                                                        | Type                         | fine-wired                  |
|                                        |                                                                                                                                                                        | nominal                      | 2.5 mm <sup>2</sup>         |
| wire end ferrule                       |                                                                                                                                                                        | Stripping length             | nominal 14 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H2.5/19D BL</a> |
|                                        |                                                                                                                                                                        | Stripping length             | nominal 12 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H2.5/12</a>     |
| Cross-section for conductor connection |                                                                                                                                                                        | Type                         | fine-wired                  |
|                                        |                                                                                                                                                                        | nominal                      | 4 mm <sup>2</sup>           |
| wire end ferrule                       |                                                                                                                                                                        | Stripping length             | nominal 12 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H4.0/12</a>     |
|                                        |                                                                                                                                                                        | Stripping length             | nominal 14 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H4.0/20D GR</a> |
| Cross-section for conductor connection |                                                                                                                                                                        | Type                         | fine-wired                  |
|                                        |                                                                                                                                                                        | nominal                      | 6 mm <sup>2</sup>           |
| wire end ferrule                       |                                                                                                                                                                        | Stripping length             | nominal 14 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H6.0/20 SW</a>  |
|                                        |                                                                                                                                                                        | Stripping length             | nominal 12 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule | <a href="#">H6.0/12</a>     |
| Cross-section for conductor connection |                                                                                                                                                                        | Type                         | fine-wired                  |
|                                        |                                                                                                                                                                        | nominal                      | 10 mm <sup>2</sup>          |
| wire end ferrule                       |                                                                                                                                                                        | Stripping length             | nominal 12 mm               |
|                                        |                                                                                                                                                                        | Recommended wire-end ferrule |                             |
| Reference text                         | Length of ferrules is to be chosen depending on the product and the rated voltage., The outside diameter of the plastic collar should not be larger than the pitch (P) |                              |                             |
| Max. clamping range                    | 6 mm <sup>2</sup>                                                                                                                                                      |                              |                             |

**OMNIMATE Power - series LL**  
**LLFS 7.50/05/180V 5.0SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Rated data acc. to IEC**

|                                                                           |                                  |                                                                       |         |
|---------------------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------------|---------|
| tested acc. to standard                                                   | In accordance with IEC 60947-7-1 | Rated current, min. number of poles (Tu=20°C)                         | 41 A    |
| Rated current, max. number of poles (Tu=20°C)                             | 32 A                             | Rated current, min. number of poles (Tu=40°C)                         | 38 A    |
| Rated current, max. number of poles (Tu=40°C)                             | 28 A                             | Rated voltage for surge voltage class / pollution degree II/2         | 1,000 V |
| Rated voltage for surge voltage class / pollution degree III/2            | 1,000 V                          | Rated voltage for surge voltage class / pollution degree III/3        | 1,000 V |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 8 kV                             | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 8 kV    |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 8 kV                             |                                                                       |         |

**Rated data acc. to CSA**

|                                   |       |                                   |       |
|-----------------------------------|-------|-----------------------------------|-------|
| Rated voltage (Use group B / CSA) | 600 V | Rated voltage (Use group C / CSA) | 600 V |
| Rated voltage (Use group D / CSA) | 600 V | Rated current (Use group B / CSA) | 37 A  |
| Rated current (Use group C / CSA) | 37 A  | Rated current (Use group D / CSA) | 5 A   |

**Rated data acc. to UL 1059**

|                                       |                                                                                     |                                       |        |
|---------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|--------|
| Institute (cURus)                     |  | Certificate No. (cURus)               | E60693 |
| Rated voltage (Use group B / UL 1059) | 600 V                                                                               | Rated voltage (Use group C / UL 1059) | 600 V  |
| Rated voltage (Use group D / UL 1059) | 600 V                                                                               | Rated current (Use group B / UL 1059) | 37 A   |
| Rated current (Use group C / UL 1059) | 37 A                                                                                | Rated current (Use group D / UL 1059) | 5 A    |
| Wire cross-section, AWG, min.         | AWG 24                                                                              | Wire cross-section, AWG, max.         | AWG 8  |
| Reference to approval values          | Specifications are maximum values, details - see approval certificate.              |                                       |        |

**Packing**

|           |     |            |     |
|-----------|-----|------------|-----|
| Packaging | Box | VPE length | 0 m |
| VPE width | 0 m | VPE height | 0 m |

**Classifications**

|             |             |            |             |
|-------------|-------------|------------|-------------|
| ETIM 6.0    | EC002643    | ETIM 7.0   | EC002643    |
| eClass 9.0  | 27-44-04-01 | eClass 9.1 | 27-44-04-01 |
| eClass 10.0 | 27-44-04-01 |            |             |

## OMNIMATE Power - series LL LLFS 7.50/05/180V 5.0SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmuller.com

## Technical data

### Notes

Notes

- Additional colours on request
- Rated current related to rated cross-section & min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- The test point can only be used as potential-pickup point.
- Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months

IPC conformity

Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

### Approvals

Approvals



ROHS

Conform

### Downloads

Approval/Certificate/Document of Conformity

[Declaration of the Manufacturer](#)

Engineering Data

[STEP](#)

White paper power electronics connected correctly

[Download Whitepaper](#)

White paper UL 600 V


[Download Whitepaper](#)

## OMNIMATE Power - series LL LLFS 7.50/05/180V 5.0SN BK BX


**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

# Drawings


## Dimensional drawing

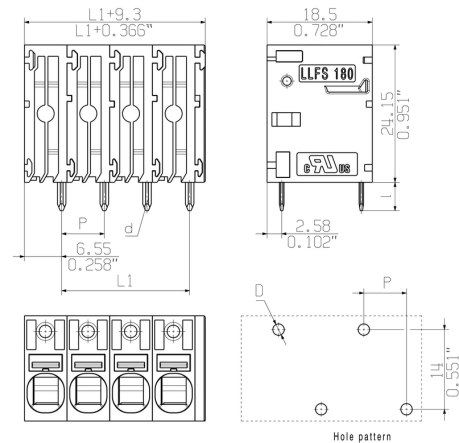


## Derating curve

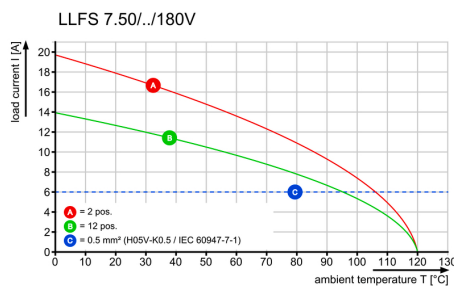

## Derating curve

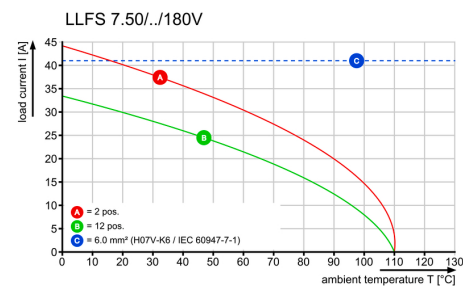


## Product benefits

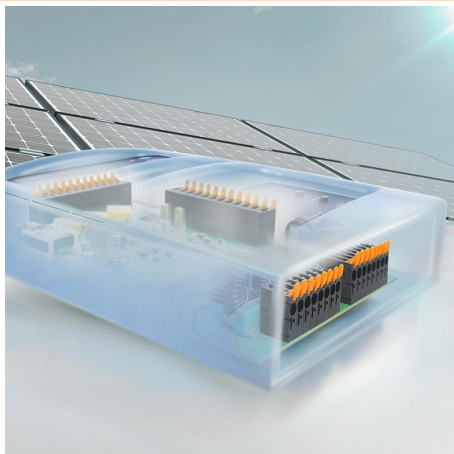

Power up to UL 600 V  
Offset solder pins

## Product benefits

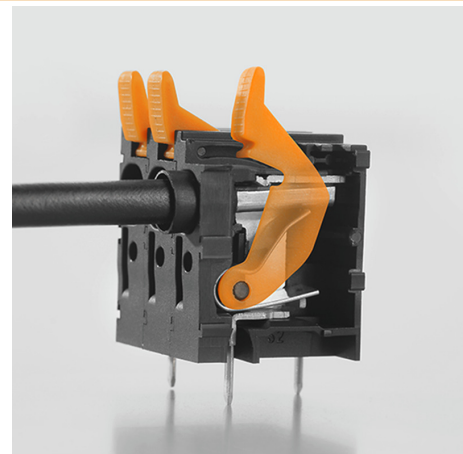

Tool-free wiring  
Top contact security





The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. Weidmueller exclusively reserves the right to file for patents, utility models or designs.

© Weidmueller Interface GmbH & Co. KG



Dimensions without tolerances are no check dimensions

The English version is binding



General customer drawing, topical version only if required

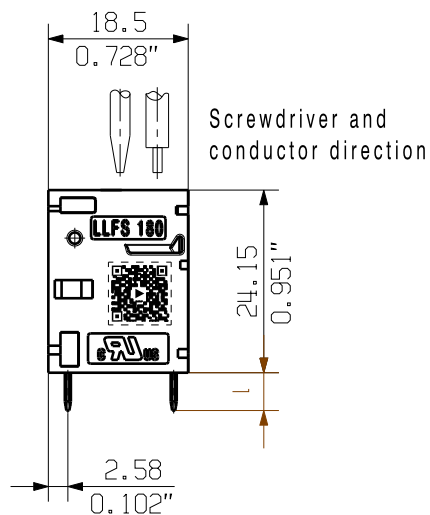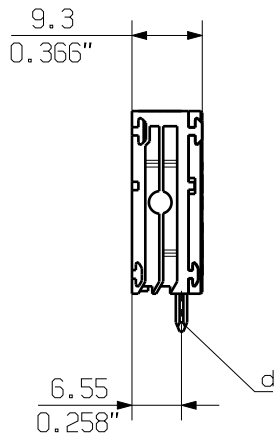

Hole pattern

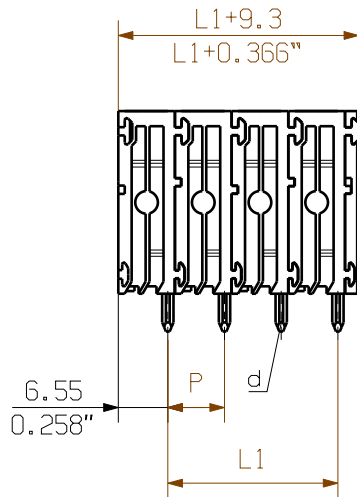

Pole: 1 2 3 4...

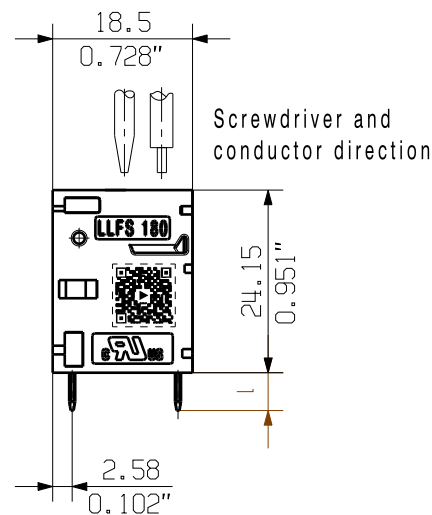

Hole pattern

For the mounting of PCBs, it should be noted that the rated data relates only to the PCB components alone. The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to IEC 60664-1 (VDE 0110). The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 60326-3 very fine.

Weidmüller PCB components are tested to the IEC 60947-7-4 standard, and are valid for its field of application. Provided that the components are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

General tolerance:  
DIN ISO 2768-mK

P = 7.50  
0.295" (Pitch)  
D = Ø2 +0.1  
0.079"  
d = 1.5x0.8  
0.059"x0.031"  
l = 5.0 +0.2 -0.6  
0.197"

|         |         |           |
|---------|---------|-----------|
| 12      | 82.50   | 3.248     |
| 11      | 75.00   | 2.953     |
| 10      | 67.50   | 2.657     |
| 9       | 60.00   | 2.362     |
| 8       | 52.50   | 2.067     |
| 7       | 45.00   | 1.772     |
| 6       | 37.50   | 1.476     |
| 5       | 30.00   | 1.181     |
| 4       | 22.50   | 0.886     |
| 3       | 15.00   | 0.591     |
| 2       | 7.50    | 0.295     |
| n Poles | L1 [mm] | L1 [inch] |

|                   |                                |                           |                           |                                                                     |                               |                                       |
|-------------------|--------------------------------|---------------------------|---------------------------|---------------------------------------------------------------------|-------------------------------|---------------------------------------|
|                   | EC00000693                     | 01                        | Prim PLM Part No.: 337396 |                                                                     | Prim ERP Part No.: 2491640000 |                                       |
|                   | First Issue Date<br>22.09.2016 | Max. nos.<br>Modification |                           |                                                                     |                               | <b>64139</b><br>Drawing no. Issue no. |
|                   | Drawn                          | 28.04.2019                | Xiang, Keqin              | <b>LLFS 7.50/.../180 ...</b><br>LEITERPLATTENKLEMME<br>PCB TERMINAL |                               |                                       |
|                   | Responsible                    |                           | Xiang, Keqin              |                                                                     |                               |                                       |
| Scale: 1/1        | Size: A3                       | Approved                  | 29.04.2019                | Xu, Shary                                                           | Sheet 01 of 01 sheets         |                                       |
| Drawings Assembly |                                |                           |                           |                                                                     | Product file: 7416 LLF 7.50   |                                       |

## Recommended wave soldering profiles

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

### Single Wave:



### Double Wave:



### Wave soldering profiles

Wired connection elements should be processed in accordance with the DIN EN 61760-1 standard. We have included two recommendations for practical wave soldering profiles, with which Weidmüller PCB terminals and connectors are qualified.

When choosing a suitable profile for your application, the following factors also need to be considered:

- PCB thickness
- Proportion of Cu in the layers
- Single/double-sided assembly
- Product range
- Heating and cooling rates

The single and double wave profiles each indicate the recommended operating range, including the maximum soldering temperature of 260°C. In practice, the maximum soldering temperature is quite often well below the above maximum profile.

We reserve the right to make technical changes.