


X Series Crystal



- 2mm X 2.5mm 4 Pads Ceramic Package
- Ultra-miniature Profile
- RoHS Compliant
- Tape and Reel Packaging



Frequency Range	16.000MHZ to 60.000MHZ
Frequency Tolerance / Stability	(See Part Number Guide for Options)
Operating Temperature Range	(See Part Number Guide for Options)
Storage Temperature	-40°C to +85°C
Aging	±2ppm / per year
Shunt Capacitance	3pF Max
Load Capacitance	10pF Standard (See Part Number Guide for Options)
Equivalent Series Resistance	See ESR Chart
Drive Level	100µW Max
Insulation Resistance	500 Megaohms Min at 100VDC

Environmental & Mechanical Detail

Shock	MIL-STD-883, Method 2002 Cond B
Solderability	MIL-STD-883, Method 2003
Solvent Resistance	MIL-STD-202, Method 215
Vibration	MIL-STD-883, Method 2007, Cond A
Gross Leak Test	MIL-STD-883, Method 1014, Cond C
Fine Leak Test	MIL-STD-883, Method 1014, Cond A
MSL	Level 1 per IPC/JEDEC J-STD 20

Marking Detail

First Line = MXX.X (not to exceed 5 characters)		
M	=	MMD
XX.X	=	Device Frequency (four digits including decimal point)
Second Line = SYWW (not to exceed 5 characters)		
S	=	Internal Code
YM	=	Date Code (Year/Month)



MMD MONITOR/QUARTZEK – An ILSI Company,
 5458 Louie Lane, Reno, NV 89511
 Phone: (775) 851-8880, www.mmdcomp.com




Revision: 09/04/13 F


ESR Chart

Frequency Range	ESR (Ohms)	Mode / Cut
16.000MHZ to 19.999MHZ	120 Max	Fund / AT
20.000MHZ to 29.999MHZ	80 Max	Fund / AT
30.000MHZ to 60.000MHZ	50 Max	Fund / AT


Part Number Guide

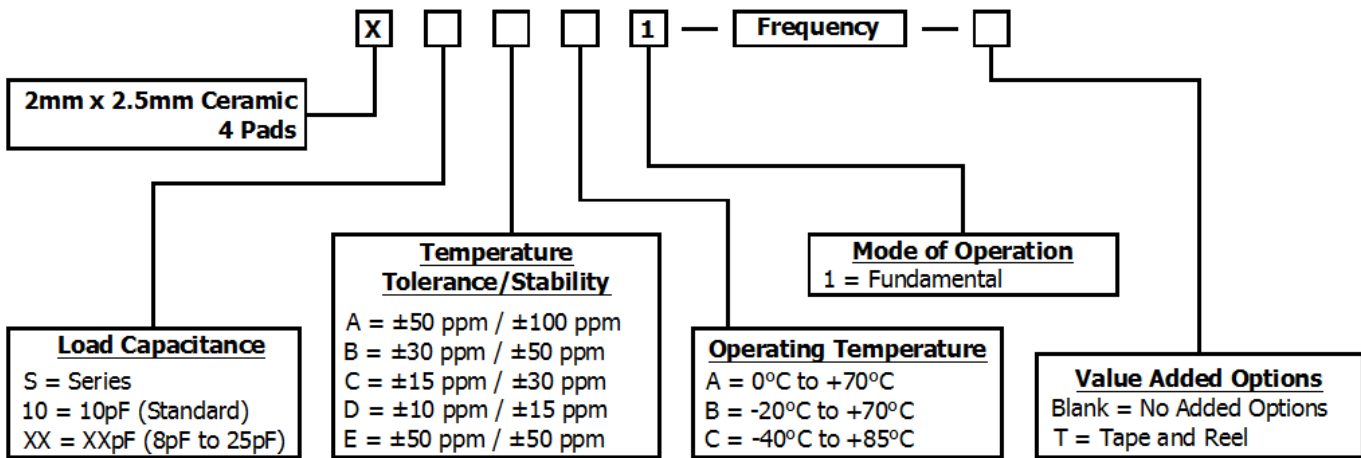

Mechanical Details

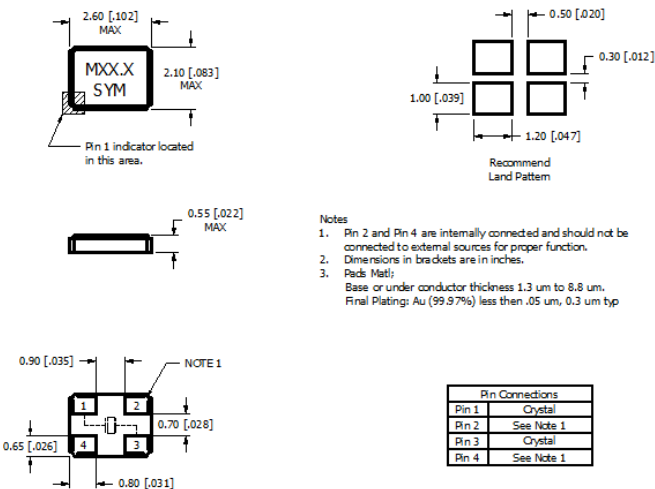

Tape & Reel

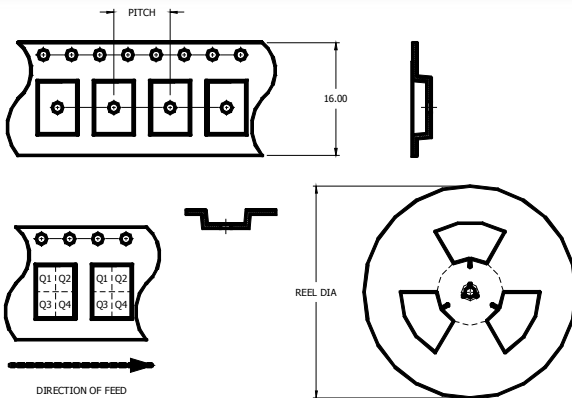

PITCH	4.00 [.157]
TAPE WIDTH	8.00 [.315]
REEL DIA	180 [7.0]
COUNT	1000
PIN 1 ORIENT.	Q1

NOTES: UNLESS OTHERWISE SPECIFIED

1. Applicable Standards / Specifications
ANSI Y14.5M, Dimensions and Tolerances
ASME-B 8 8 mm through 200mm Embossed Carrier Taping and 8 mm and 12 mm
Punched Carrier Taping of Surface Mount Components for Automatic Handling.
2. Dimensions are in millimeters [inch].
3. Tolerances are ± 0.1 [.004] mm unless otherwise specified.
4. Do not scale drawing.



MMD MONITOR/QUARTZEK – An ILSI Company,

5458 Louie Lane, Reno, NV 89511

Phone: (775) 851-8880, www.mmdcomp.com



Revision:

09/04/13 F

Pg 2 of 2

Specifications are subject to change without notice.