


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	01/19/2020	GUTTADAURO

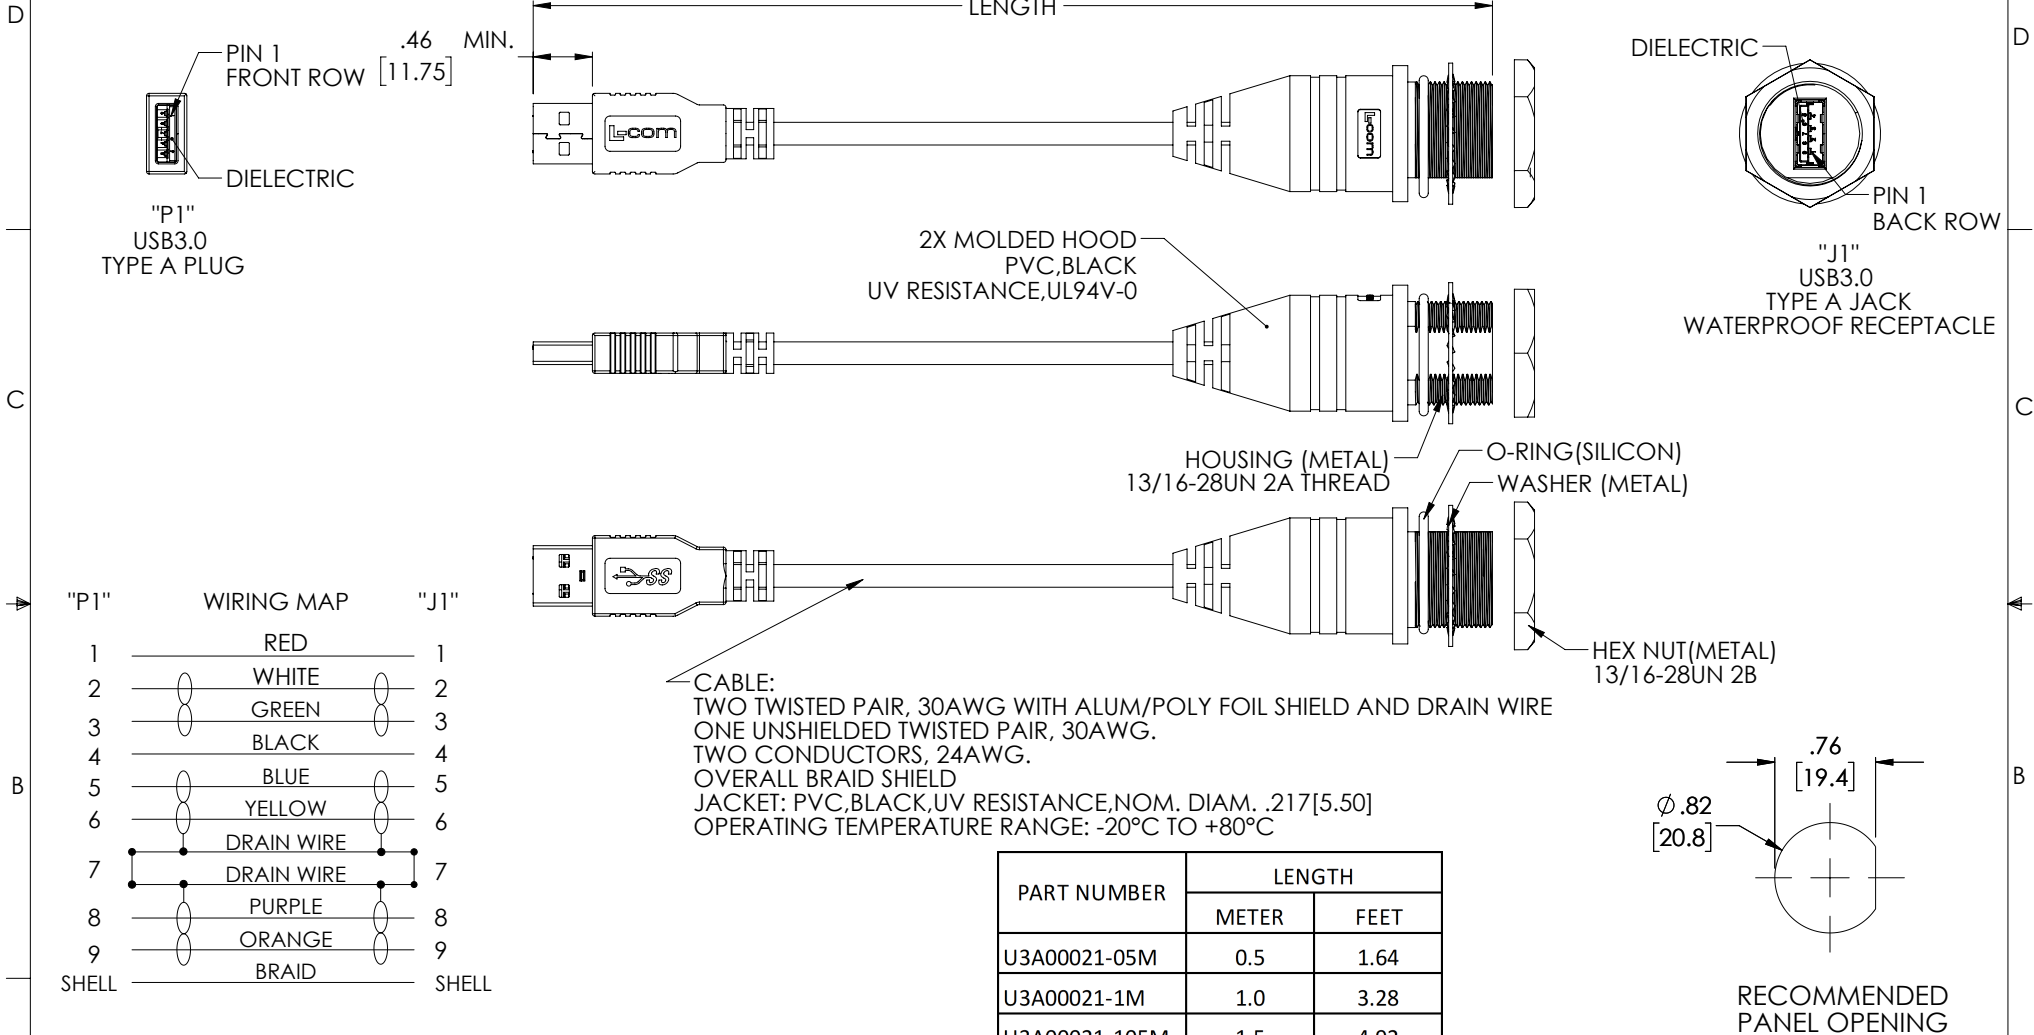

NOTES:

- INGRESS PROTECTION RATING IS IP67 (J1 ONLY, MATED)
- CONNECTOR CONTACTS HAVE 30 μINCHES GOLD PLATING OVER NICKEL PLATING
- THE CABLE SHIELD DRAIN WIRE IS CONNECTED TO THE METAL SHELL OF THE JACK
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
- CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

PART NUMBER	LENGTH	
	METER	FEET
U3A00021-05M	0.5	1.64
U3A00021-1M	1.0	3.28
U3A00021-105M	1.5	4.92

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE	
OVERALL CABLE LENGTH TOLERANCES:		DRAWN BY DCUI		01/19/2020	
≤12 [305] = +1 [25] / -0		CHECKED BY SPAN		01/19/2020	
>12 [305] ≤60 [1524] = +2 [51] / -0		APPROVED BY GUTTADAURO		01/19/2020	
>60 [1524] ≤120 [3048] = +4 [102] / -0		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION	
>120 [3048] ≤300 [7620] = +6 [152] / -0		COLOR VARIATIONS MAY OCCUR		CA, USB 3.0 AM TO WP TYPE AF, SHLD	
>300 [7620] = +5% / -0		THIRD-ANGLE PROJECTION		SIZE A	
ALL OTHER DIMENSIONAL TOLERANCES:		CAGE CODE 43321		DWG. NO. U3A00021	
.X = ± .2 [5]		SCALE: NONE		CAD FILE: U3A00021.SLDDRW	
.XX = ± .02 [.5]		SHEET 1 OF 1		REV. A	
.XXX = ± .005 [.13]					
FRACTIONS ± 1/32					
ANGLES ± 1°					