




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	01/22/2020	GUTTADAURO

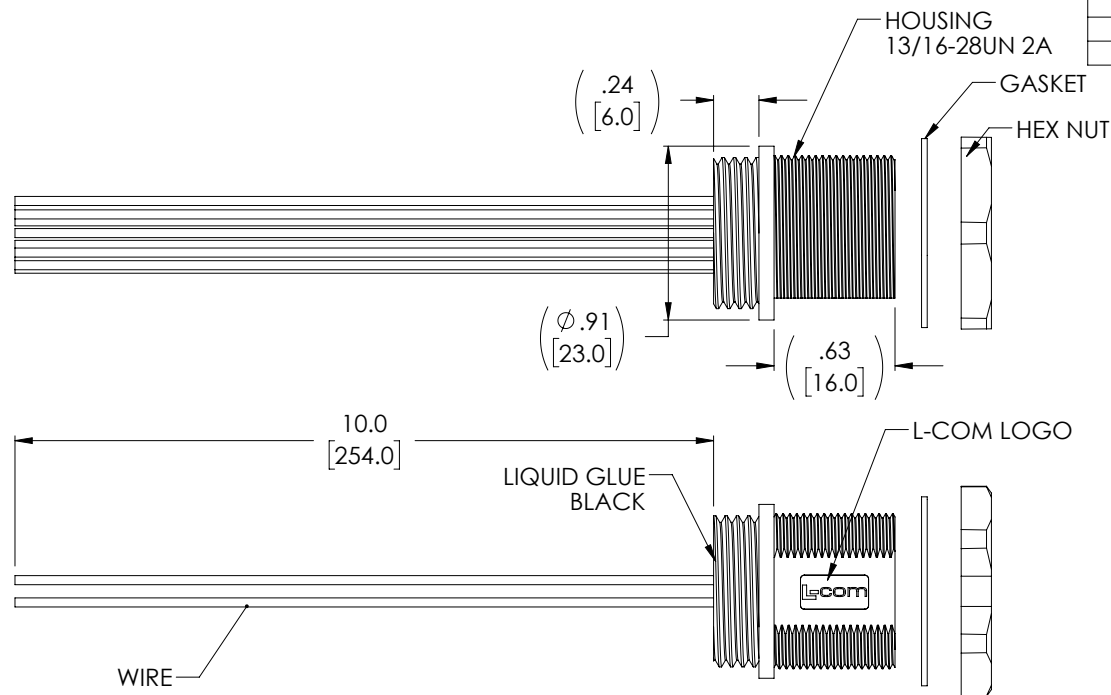


"J1"
USB 3.0
TYPE B JACK
WATERPROOF JACK



WIRING TABLE		
PIN#	COLOR	WIRE GAUGE
1	RED	24AWG
2	WHITE	28AWG
3	GREEN	28AWG
4	BLACK	24AWG
5	BLUE	28AWG
6	YELLOW	28AWG
7	YELLOW/GREEN	28AWG
8	PURPLE	28AWG
9	ORANGE	28AWG
SHELL	GRAY	24AWG

NOTES:

- 1.CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
- 2.INGRESS PROTECTION RATING IS IP67 (J1 ONLY ,MATED)
- 3.CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE				50 High Street, West Mill, North Andover, MA 01845 USA Phone: 1.800.341.5266 1.978.682.6936	
OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DCUI		01/19/2020		an INFINIT [®] brand		CATEGORY USB 3.0	
		CHECKED BY		01/19/2020					
		APPROVED BY		01/19/2020					
ALL OTHER DIMENSIONAL TOLERANCES: $.X = \pm .2$ [5] $.XX = \pm .02$ [.5] $.XXX = \pm .005$ [.13]		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION WP USB 3.0 BF WITH 10" WIRE LEADS					
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 43321		DWG. NO. U3A00027-10I	
				SCALE: NONE		CAD FILE: U3A00027-10I.SLDDRW			REV A
				SHEET 1 OF					