

# LX8 Series


## EV Series 0.8 Amp Sensitive Triacs

**HF** RoHS

### Main Features

| Symbol            | Value      | Unit |
|-------------------|------------|------|
| $I_{T(RMS)}$      | 0.8        | A    |
| $V_{DRM}/V_{RRM}$ | 400 to 600 | V    |
| $I_{GT}$          | 3 to 5     | mA   |

### Schematic Symbol



### Description

solid state switch series offering direct interface to microprocessor drivers in economical TO-92 and surface mount packages. The die voltage blocking junctions are glass-passivated to ensure long term reliability and parametric stability.

### Features & Benefits

- RoHS compliant and Halogen-Free
- Blocking voltage ( $V_{DRM}$ ) capability — up to 600V
- Surge capability > 9.5Amps
- Static  $dv/dt$  > 10 Volts/ $\mu$ sec
- Thru hole and surface mount packages

### Applications

The LX8 EV Series is especially designed for low current applications such as heating controls in hair care products, as well as replacement of mechanical switch contacts where long life is required.

# LX8 Series

## EV Series 0.8 Amp Sensitive Triacs

### Absolute Maximum Ratings

| Symbol       | Parameter                                                                                         | Value                                                      | Unit       |
|--------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------|------------|
| $I_{T(RMS)}$ | RMS on-state current (full sine wave)                                                             | TO-92<br>$T_c = 50^\circ\text{C}$                          | 0.8A       |
|              |                                                                                                   | SOT-89<br>$T_c = 60^\circ\text{C}$                         |            |
|              |                                                                                                   | SOT-223<br>$T_c = 90^\circ\text{C}$                        |            |
| $I_{TSM}$    | Non repetitive surge peak on-state current<br>(Single cycle, $T_J$ initial = $25^\circ\text{C}$ ) | -<br>$F = 50\text{ Hz}$                                    | 8.0        |
|              |                                                                                                   | -<br>$F = 60\text{ Hz}$                                    | 9.5        |
| $I^2t$       | $I^2t$ Value for fusing                                                                           | $t_p = 10\text{ ms}$<br>$F = 50\text{ Hz}$                 | 0.32       |
|              |                                                                                                   | $t_p = 8.3\text{ ms}$<br>$F = 60\text{ Hz}$                | 0.37       |
| $di/dt$      | Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$                                 | $T_J = 110^\circ\text{C}$                                  | 20         |
| $I_{GTM}$    | Peak gate current                                                                                 | $t_p = 10\text{ }\mu\text{s}$<br>$T_J = 110^\circ\text{C}$ | 1          |
| $P_{G(AV)}$  | Average gate power dissipation                                                                    | $T_J = 110^\circ\text{C}$                                  | 0.1        |
| $T_{stg}$    | Storage junction temperature range                                                                |                                                            | -40 to 150 |
| $T_J$        | Operating junction temperature range                                                              |                                                            | -40 to 110 |

### Electrical Characteristics ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)

| Symbol      | Description                                  | Test Conditions                                                               | Quadrant         | Limit | Value   |         | Unit             |
|-------------|----------------------------------------------|-------------------------------------------------------------------------------|------------------|-------|---------|---------|------------------|
|             |                                              |                                                                               |                  |       | LX803xy | LX807xy |                  |
| $I_{GT}$    | DC Gate Trigger Current                      | $V_D = 12\text{V}$<br>$R_L = 60\text{ }\Omega$                                | I – II – III, IV | MAX.  | 3<br>5  | 5<br>7  | mA               |
| $V_{GT}$    | DC Gate Trigger Voltage                      |                                                                               | ALL              | MAX.  | 1.3     | 1.3     | V                |
| $I_H$       | Holding Current                              | Gate Open                                                                     |                  | MAX.  | 5       | 5       | mA               |
| $dv/dt$     | Critical Rate-of-Rise of Off-State Voltage   | $T_J = 110^\circ\text{C}$ , $V_D = V_{DRM}$<br>Exponential Waveform Gate Open |                  | MIN.  | 10      | 10      | V/ $\mu\text{s}$ |
| $(dv/dt)_c$ | Critical Rate-of-Rise of Commutating Voltage | $(di/dt)_c = 0.43\text{A/ms}$<br>$T_J = 110^\circ\text{C}$                    |                  | MIN.  | 1.5     | 1.5     | V/ $\mu\text{s}$ |
| $t_{gt}$    | Turn-On Time                                 | $I_G = 25\text{mA}$<br>$PW = 15\mu\text{s}$<br>$I_T = 1.2\text{A (pk)}$       |                  | MAX.  | 2.0     | 2.0     | $\mu\text{s}$    |

Note: x = voltage, y = package

### Static Characteristics ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)

| Symbol    | Description                        | Test Conditions                           | Limit | Value | Unit          |
|-----------|------------------------------------|-------------------------------------------|-------|-------|---------------|
| $V_{TM}$  | Peak On-State Voltage              | $I_{TM} = 1.13\text{A (pk)}$              | MAX   | 1.60  | V             |
| $I_{DRM}$ | Off-State Current, Peak Repetitive | $V_D = V_{DRM}$ $T_J = 25^\circ\text{C}$  | MAX   | 5     | $\mu\text{A}$ |
|           |                                    | $V_D = V_{DRM}$ $T_J = 110^\circ\text{C}$ |       | 100   | $\mu\text{A}$ |

### Thermal Resistances

| Symbol       | Description           | Test Conditions                   | Value   | Unit |
|--------------|-----------------------|-----------------------------------|---------|------|
| $R_{th(JC)}$ | Junction to case (AC) | $I_T = 0.8A_{(RMS)}$ <sup>1</sup> | TO-92   | 60   |
|              |                       |                                   | SOT-89  | 50   |
|              |                       |                                   | SOT-223 | 25   |
| $R_{th(JA)}$ | Junction to ambient   | $I_T = 0.8A_{(RMS)}$ <sup>1</sup> | TO-92   | 150  |
|              |                       |                                   | SOT-89  | 90   |
|              |                       |                                   | SOT-223 | 60   |

1. 60Hz AC resistive load condition, 100% conduction.

# LX8 Series

## EV Series 0.8 Amp Sensitive Triacs

Figure 1: Definition of Quadrants

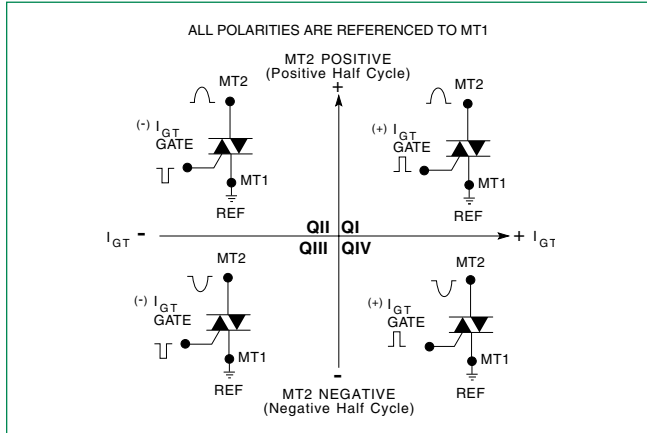


Figure 2: Normalized DC Gate Trigger Current for All Quadrants vs. Junction Temperature

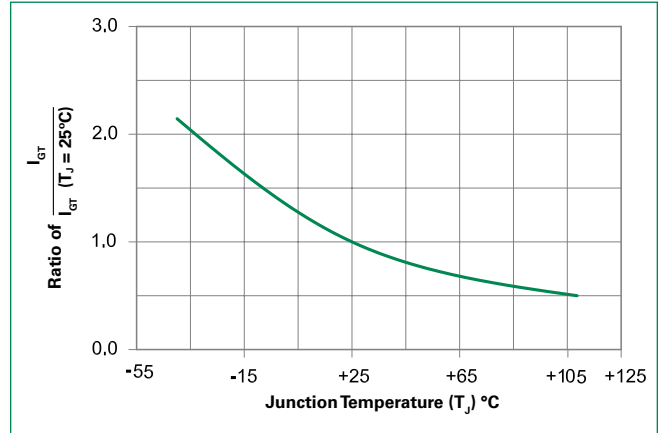


Figure 3: Normalized DC Holding Current vs. Junction Temperature

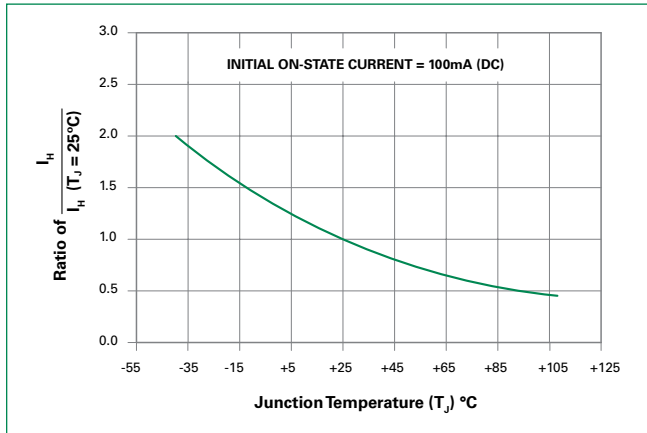


Figure 4: Normalized DC Gate Trigger Voltage for All Quadrants vs. Junction Temperature

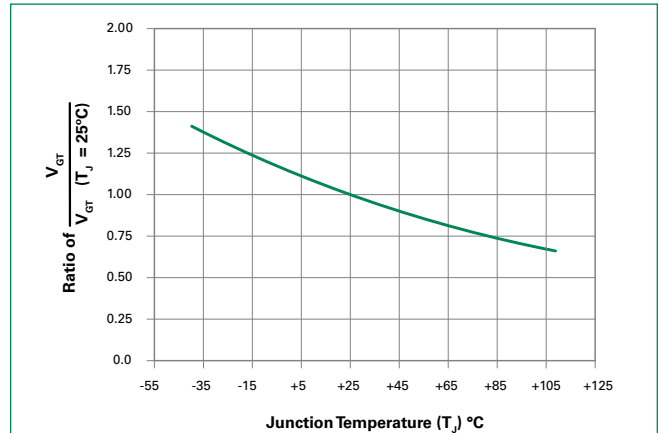


Figure 5: Power Dissipation (Typical) vs. RMS On-State Current


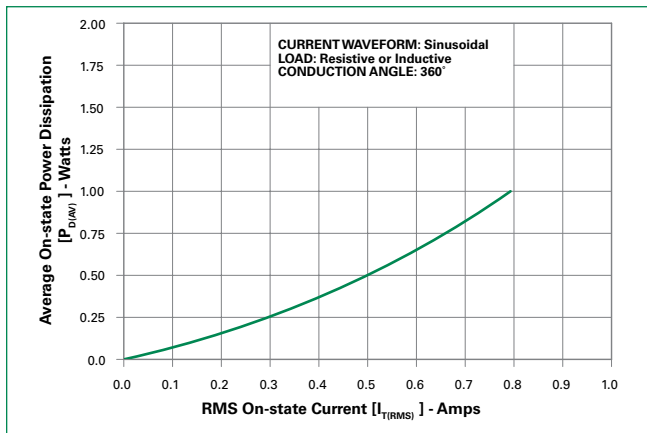



Figure 6: Maximum Allowable Case Temperature vs. On-State Current

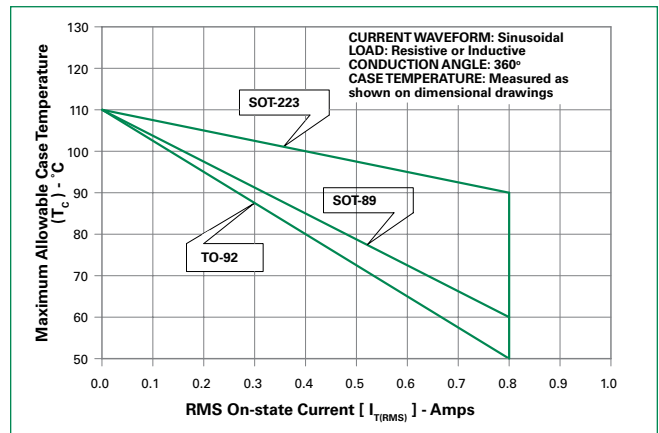

# LX8 Series


## EV Series 0.8 Amp Sensitive Triacs

Figure 7: Surge Peak On-State Current vs. Number of Cycles

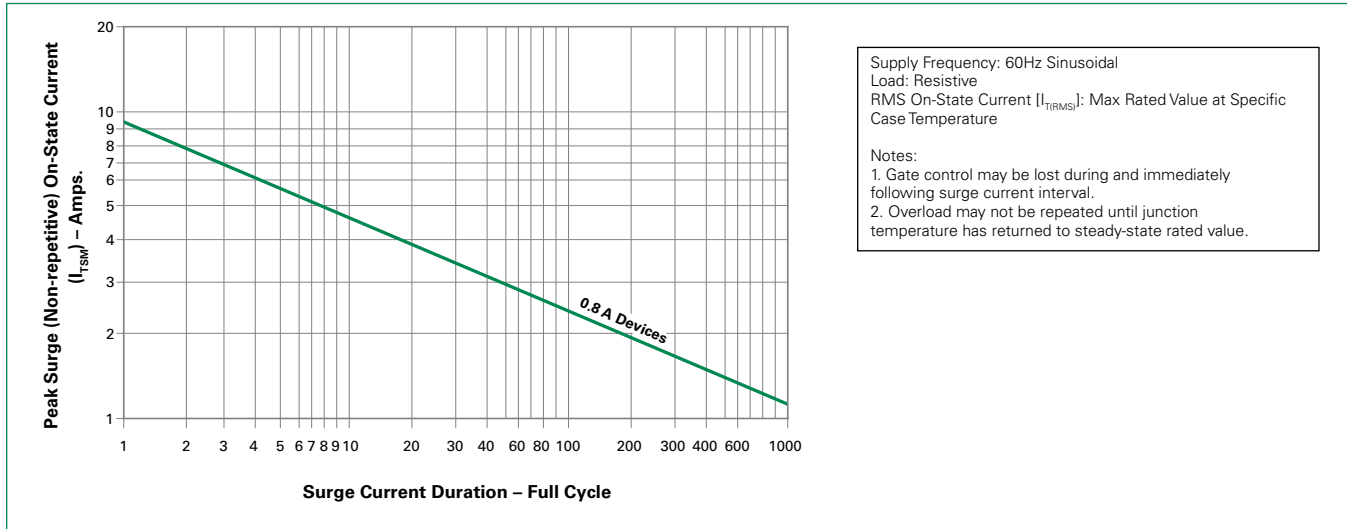

## Soldering Parameters

|                                                        |                                    |                         |
|--------------------------------------------------------|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb – Free assembly      |
| Pre Heat                                               | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                        | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                        | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp) ( $T_L$ ) to peak |                                    | 5°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 5°C/second max          |
| Reflow                                                 | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                        | - Time (min to max) ( $t_s$ )      | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate                                         |                                    | 5°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |
| Do not exceed                                          |                                    | 280°C                   |

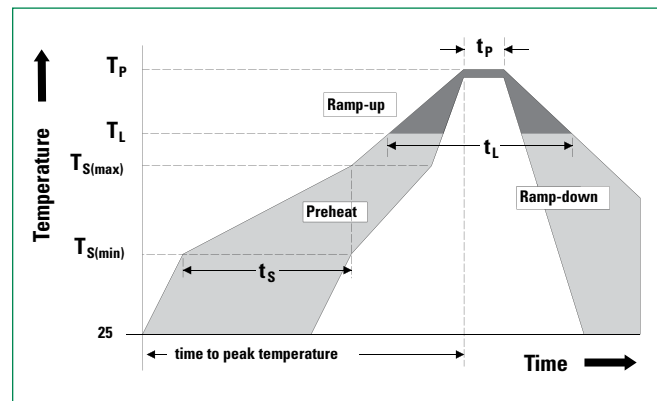

# LX8 Series

## EV Series 0.8 Amp Sensitive Triacs


### Physical Specifications

|                        |                                                         |
|------------------------|---------------------------------------------------------|
| <b>Terminal Finish</b> | 100% Matte Tin-plated.                                  |
| <b>Body Material</b>   | UL Recognized compound meeting flammability rating V-0. |
| <b>Lead Material</b>   | Copper Alloy                                            |

### Design Considerations

Careful selection of the correct component for the application's operating parameters and environment will go a long way toward extending the operating life of the Thyristor. Good design practice should limit the maximum continuous current through the main terminals to 75% of the component rating. Other ways to ensure long life for a power discrete semiconductor are proper heat sinking and selection of voltage ratings for worst case conditions. Overheating, overvoltage (including  $dv/dt$ ), and surge currents are the main killers of semiconductors. Correct mounting, soldering, and forming of the leads also help protect against component damage.

### Dimensions — TO-92 (E Package)

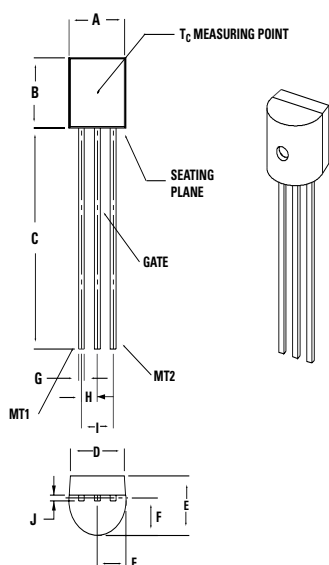

### Reliability/Environmental Tests


| Test                             | Specifications and Conditions                                              |
|----------------------------------|----------------------------------------------------------------------------|
| <b>AC Blocking</b>               | MIL-STD-750, M-1040, Cond A Applied Peak AC voltage @ 110°C for 1008 hours |
| <b>Temperature Cycling</b>       | MIL-STD-750, M-1051, 100 cycles; -40°C to +150°C; 15-min dwell-time        |
| <b>Temperature/Humidity</b>      | EIA / JEDEC, JESD22-A101 1008 hours; 320V - DC: 85°C; 85% rel humidity     |
| <b>High Temp Storage</b>         | MIL-STD-750, M-103, 1008 hours; 150°C                                      |
| <b>Low-Temp Storage</b>          | 1008 hours; -40°C                                                          |
| <b>Resistance to Solder Heat</b> | MIL-STD-750 Method 2031                                                    |
| <b>Solderability</b>             | ANSI/J-STD-002, category 3, Test A                                         |
| <b>Lead Bend</b>                 | MIL-STD-750, M-2036 Cond E                                                 |

| Dimensions | Inches |       | Millimeters |       |
|------------|--------|-------|-------------|-------|
|            | Min    | Max   | Min         | Max   |
| <b>A</b>   | 0.175  | 0.205 | 4.450       | 5.200 |
| <b>B</b>   | 0.170  | 0.210 | 4.320       | 5.330 |
| <b>C</b>   | 0.500  | -     | 12.70       | -     |
| <b>D</b>   | 0.135  | -     | 3.430       | -     |
| <b>E</b>   | 0.125  | 0.165 | 3.180       | 4.190 |
| <b>F</b>   | 0.080  | 0.105 | 2.040       | 2.660 |
| <b>G</b>   | 0.016  | 0.021 | 0.407       | 0.533 |
| <b>H</b>   | 0.045  | 0.055 | 1.150       | 1.390 |
| <b>I</b>   | 0.095  | 0.105 | 2.420       | 2.660 |
| <b>J</b>   | 0.015  | 0.020 | 0.380       | 0.500 |



# LX8 Series

## EV Series 0.8 Amp Sensitive Triacs

### Dimensions – SOT-89

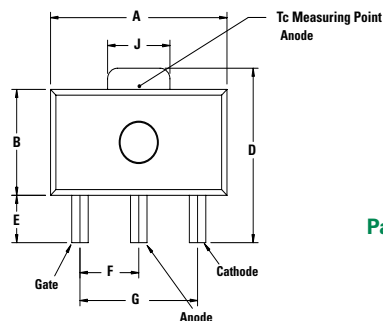


Dimensions in Millimeters (Inches)

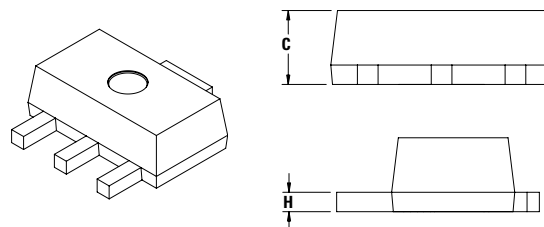



| Dimension | Inches |     |       | Millimeters |     |      |
|-----------|--------|-----|-------|-------------|-----|------|
|           | Min    | Typ | Max   | Min         | Typ | Max  |
| A         | 0.173  | —   | 0.181 | 4.40        | —   | 4.60 |
| B         | 0.090  | —   | 0.102 | 2.29        | —   | 2.60 |
| C         | 0.055  | —   | 0.063 | 1.40        | —   | 1.60 |
| D         | 0.155  | —   | 0.167 | 3.94        | —   | 4.25 |
| E         | 0.035  | —   | 0.047 | 0.89        | —   | 1.20 |
| F         | 0.056  | —   | 0.062 | 1.42        | —   | 1.57 |
| G         | 0.115  | —   | 0.121 | 2.92        | —   | 3.07 |
| H         | 0.014  | —   | 0.017 | 0.35        | —   | 0.44 |
| I         | 0.014  | —   | 0.019 | 0.36        | —   | 0.48 |
| J         | 0.064  | —   | 0.072 | 1.62        | —   | 1.83 |

### Dimensions – SOT-223

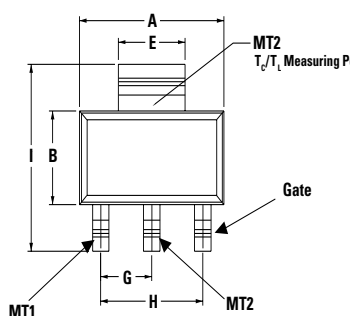

Dimensions in Millimeters (Inches)

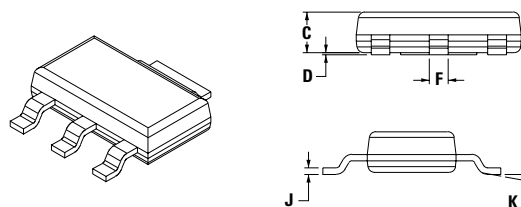

| Dimensions | Inches  |       |       | Millimeters |      |      |
|------------|---------|-------|-------|-------------|------|------|
|            | Min     | Typ   | Max   | Min         | Typ  | Max  |
| A          | 0.248   | 0.256 | 0.264 | 6.30        | 6.50 | 6.70 |
| B          | 0.130   | 0.138 | 0.146 | 3.30        | 3.50 | 3.70 |
| C          | —       | —     | 0.071 | —           | —    | 1.80 |
| D          | 0.001   | —     | 0.004 | 0.02        | —    | 0.10 |
| E          | 0.114   | 0.118 | 0.124 | 2.90        | 3.00 | 3.15 |
| F          | 0.024   | 0.027 | 0.034 | 0.60        | 0.70 | 0.85 |
| G          | —       | 0.090 | —     | —           | 2.30 | —    |
| H          | —       | 0.181 | —     | —           | 4.60 | —    |
| I          | 0.264   | 0.276 | 0.287 | 6.70        | 7.00 | 7.30 |
| J          | 0.009   | 0.010 | 0.014 | 0.24        | 0.26 | 0.35 |
| K          | 10° MAX |       |       |             |      |      |

# LX8 Series

## EV Series 0.8 Amp Sensitive Triacs

### Product Selector


| Part Number | Voltage | Gate Sensitivity Quadrants |      | Package |
|-------------|---------|----------------------------|------|---------|
|             |         | I – II – III               | IV   |         |
| LX803DE     | 400 V   | 3 mA                       | 5 mA | TO-92   |
| LX803ME     | 600 V   | 3 mA                       | 5 mA | TO-92   |
| LX803DT     | 400 V   | 3 mA                       | 5 mA | SOT-223 |
| LX803MT     | 600 V   | 3 mA                       | 5 mA | SOT-223 |
| LX807DE     | 400 V   | 5 mA                       | 7 mA | TO-92   |
| LX807ME     | 600 V   | 5 mA                       | 7 mA | TO-92   |
| LX807DT     | 400 V   | 5 mA                       | 7 mA | SOT-223 |
| LX807MT     | 600 V   | 5 mA                       | 7 mA | SOT-223 |
| LX807MB     | 600 V   | 5 mA                       | 7 mA | SOT-89  |

### Packing Options


| Part Number | Marking | Weight  | Packing Mode | Base Quantity |
|-------------|---------|---------|--------------|---------------|
| LX8xxyE     | LX8xxyE | 0.217 g | Bulk         | 2500          |
| LX8xxyEAP   | LX8xxyE | 0.217 g | Ammo Pack    | 2000          |
| LX8xxyERP   | LX8xxyE | 0.217 g | Tape & Reel  | 2000          |
| LX8xxyTRP   | LX8xxyT | 0.120 g | Tape & Reel  | 1000          |
| LX8xxyBRP   | 8xx     | 0.053 g | Tape & Reel  | 1000          |

Note: xx = gate sensitivity, y = voltage

### Part Numbering System

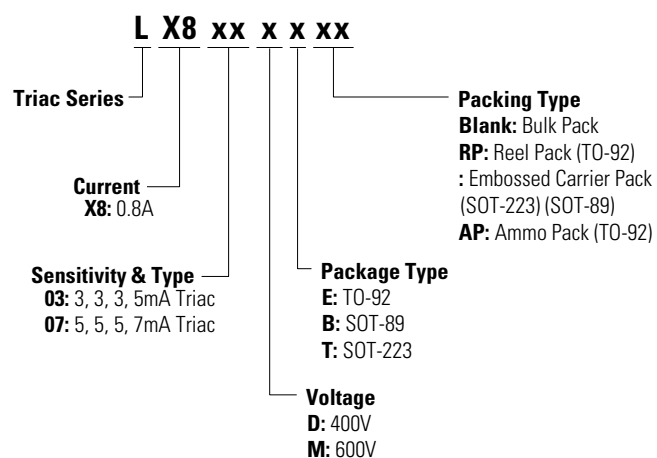

### Part Marking System

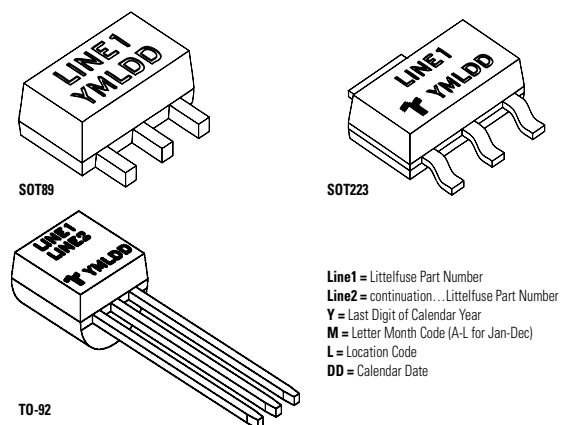


# LX8 Series

## EV Series 0.8 Amp Sensitive Triacs


### TO-92 (3-lead) Reel Pack (RP) Radial Leaded Specifications

Meets all EIA-468-C Standards

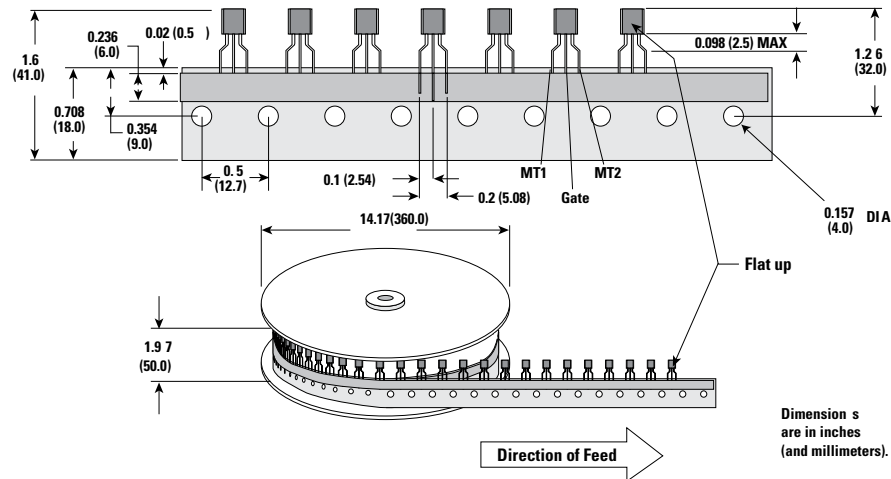

### TO-92 (3-lead) Ammo Pack (AP) Radial Leaded Specifications

Meets all EIA-468-C Standards

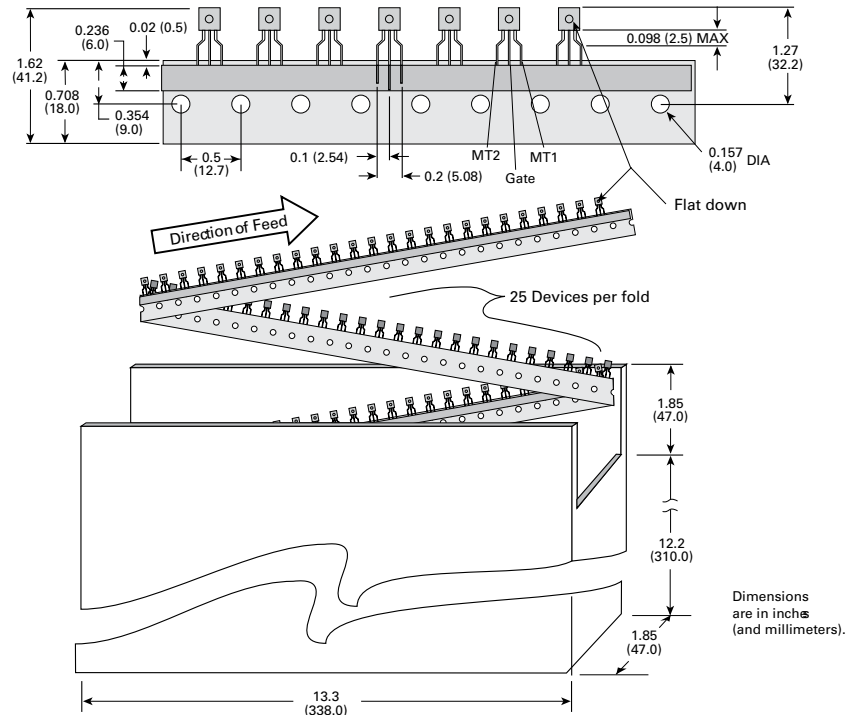





# LX8 Series

## EV Series 0.8 Amp Sensitive Triacs

### SOT-89 Reel Pack (RP) Specifications

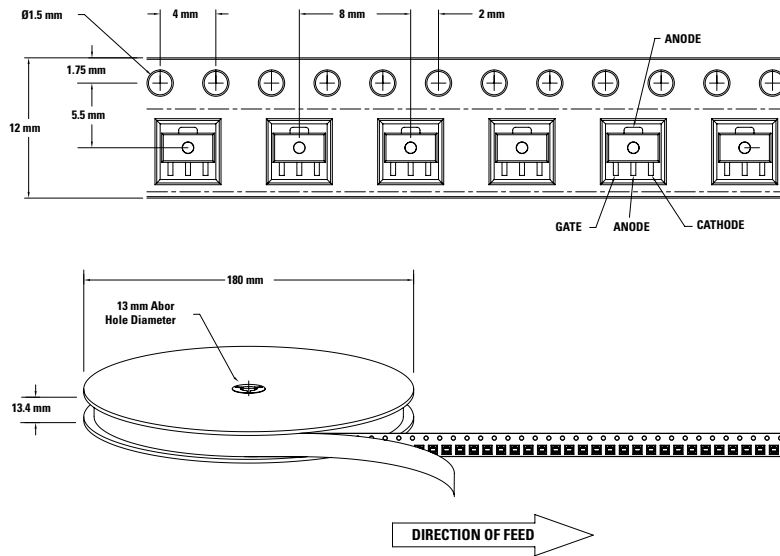


### SOT-89 Reel Pack (RP1) Specifications

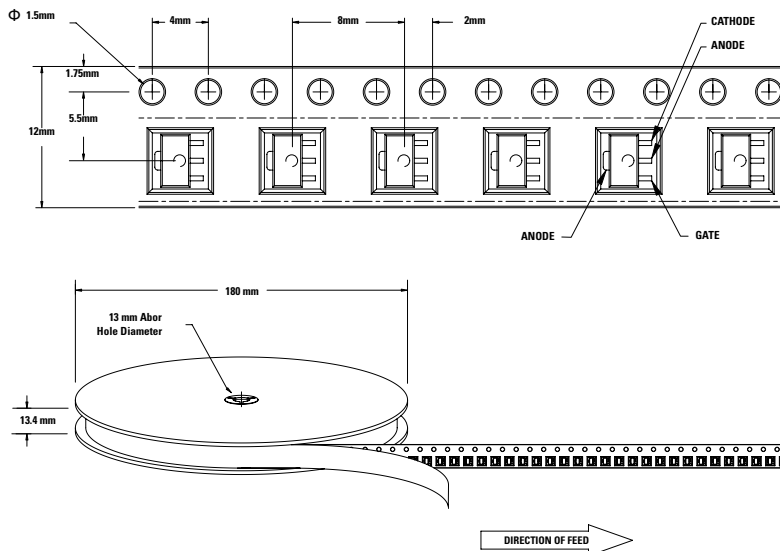

# LX8 Series

## EV Series 0.8 Amp Sensitive Triacs

### SOT-223 Reel Pack (RP) Specifications

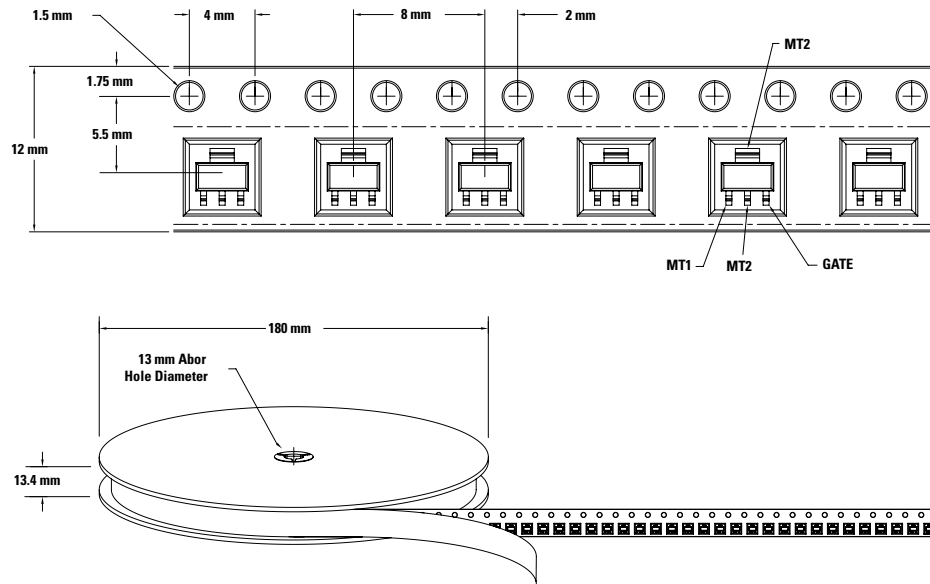

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.