



Mechanical Details

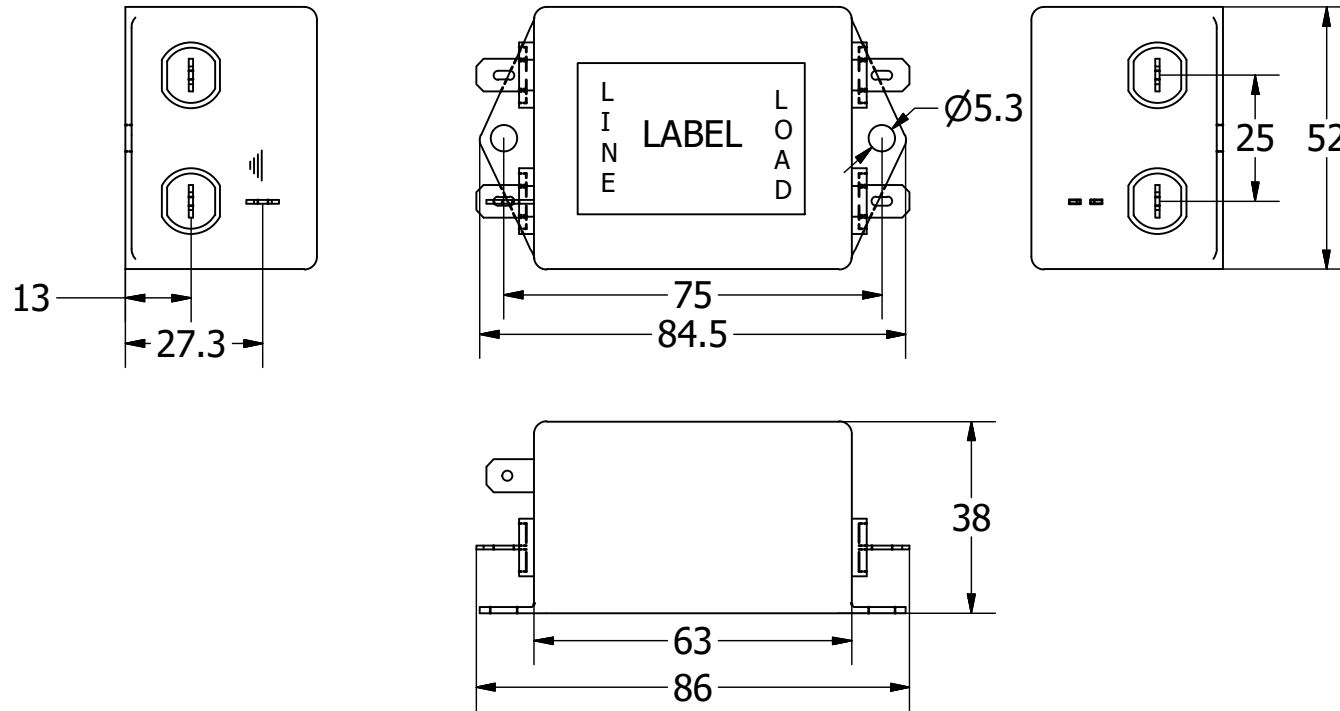


NOTES: UNLESS OTHERWISE SPECIFIED


1	TOLERANCE TO BE $\pm 1.0\text{mm}$.
2	ALL DIMENSIONS ARE IN MM
3	

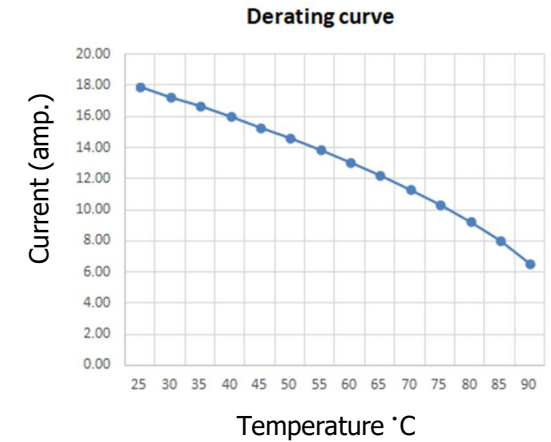

PRODUCT LABEL

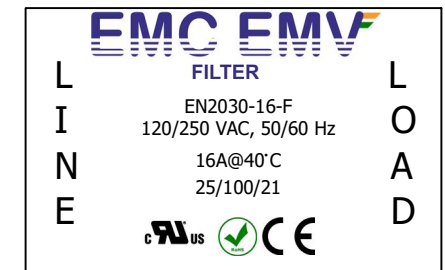

Electrical Schematic

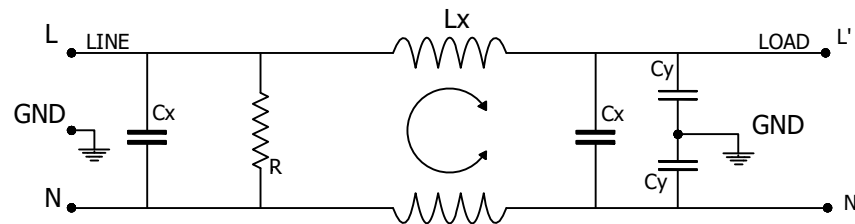


SPECIFICATION

- 1) RATED VOLTAGE (MAX):
16 AMP, 120/250 VAC 50-60HZ;
- 2) Hi-pot RATING (ONE MINUTE):
LINE TO GROUND: 3000 VDC
LINE TO LINE : 1100 VDC
- 3) MAXIMUM LEAKAGE LINE TO GROUND:
0.90mA @120 VAC 60 Hz;
1.57mA @250 VAC 50 Hz;
- 4) CLIMATE CLASS: 25/100/21

TEMPERATURE RANGE: -25°C to +100°C
OVERLOAD CURRENT: 1.5x Rated ct. for 1 min.

50 ohm - 50 ohm Typical Insertion Loss

FREQUENCY MHZ	0.01	0.1	0.5	1.0	2.0	5.0	10
COMMON DB	16	37	63	65	66	78	60
DIFFERENTIAL DB	20	48	101	86	78	76	53



A	ISSUE		SUIT	AJAY	AUG. 2019
REV.	DESCRIPTION	ECN	DWN	APVD.	APVD. DATE
 ARROW POWER COMPONENTS PVT. LTD. A-40,Wazirpur Industrial Area New Delhi ,110052 Email:- aj@emcmv.com					
DRAWN BY SUJIT		VERIFIED BY RISHABH		APPROVED BY AJAY	
				CHECKED DATE 09-AUG-2019	
DESC. SINGLE PHASE SINGLE STAGE FILTER					PAGE 1 Of 1
SERIES EN2030		PART NO. EN2030-16-F			