


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/09/2020	PHOSPODAR

PART NUMBER	FIBER MODE	CONNECTOR POLISH	BOOT COLOR	METERS [FEET]
FPT06-SCUSM-BL-3	9/125 SINGLE MODE OS2	U (ULTRA)	BLUE	3.0 [9.84]

WIRING MAP	
FIBER #	SC COLOR
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	GRAY
6	WHITE

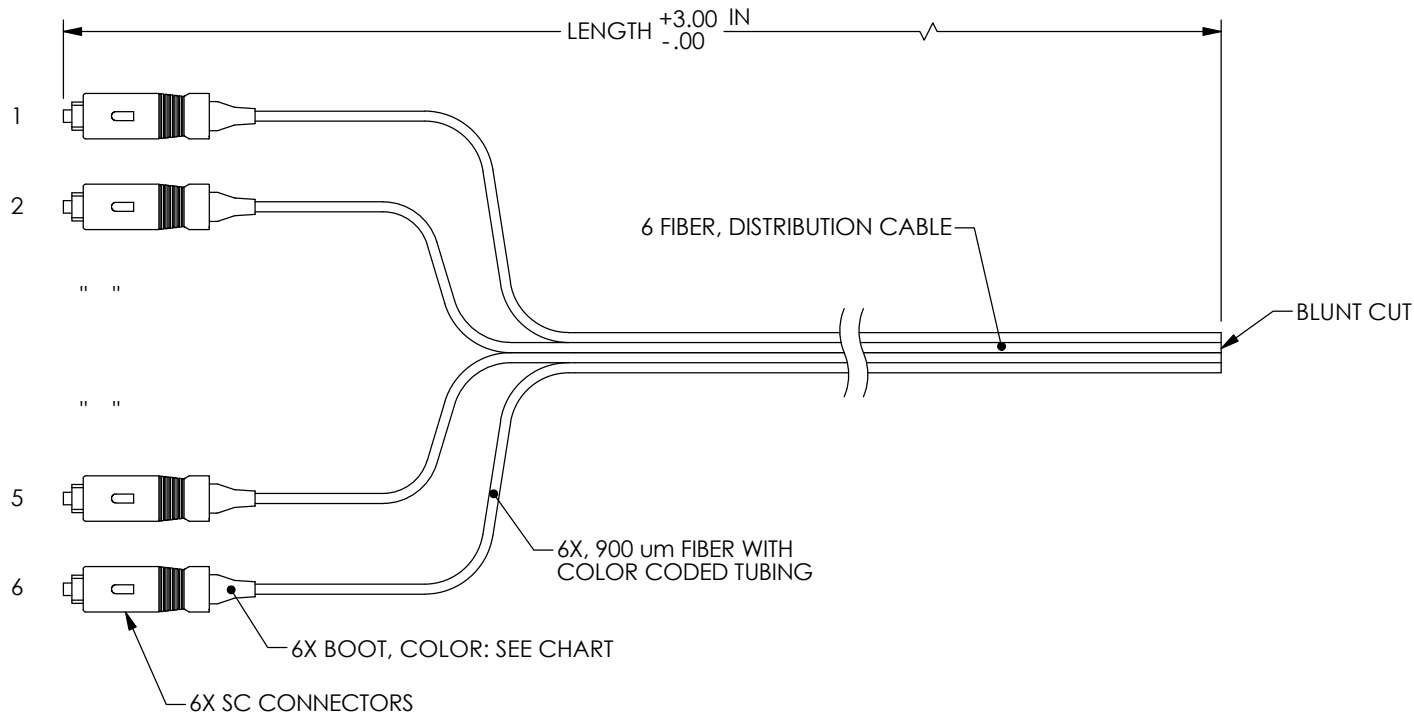

NOTES:

- SEE CHART FOR PART NUMBERS, FIBER MODES, COLORS, AND LENGTHS.
- SC CONNECTOR ASSEMBLY POLISH TYPE: SEE CHART
- ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		L-com™ an INFINITI® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DFRISIELLO		07/09/2020			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [15] ± 1/32 .XXX = ± .005 [13] ANGLES ± 1°		CHECKED BY PHOSPODAR		07/09/2020			
THIRD-ANGLE PROJECTION		APPROVED BY PHOSPODAR		07/09/2020			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY		FIBER OPTICS			
PRODUCT DESCRIPTION		6 Fiber SC/UPC Distribution Style Pigtail, SM, Blue Boots 900um					
COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 43321	ITEM NO. FPT06-SCUSM-BL	REV. A		
SCALE: NONE		CAD FILE: FPT06-SCUSM-BL.SLDDRW			SHEET 1 OF 1		