


## Panel Mounted for 5mm x 20mm Fuses

### HTC-30M


**Ratings:** 250V, 6.3A, 2.5W  
Screwdriver slot

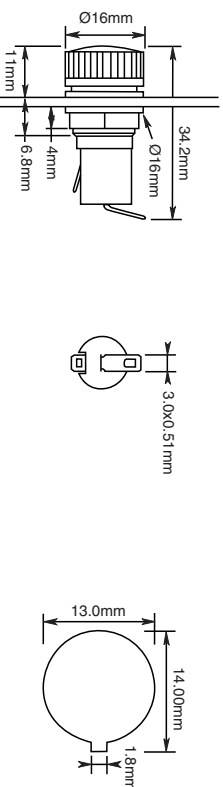

*Data Sheet: 2110*

### HTC-35M


**Ratings:** 250V, 6.3A, 2.5W  
Threaded cap

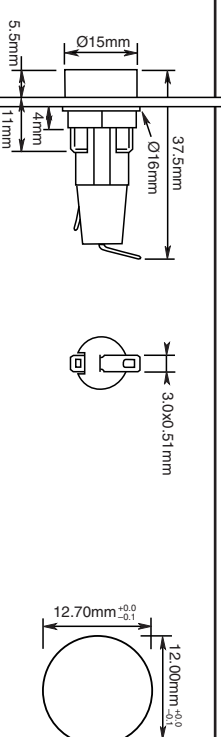

*Data Sheet: 2110*

### HTC-40M


**Ratings:** 250V, 6.3A, 2.5W  
Screwdriver slot

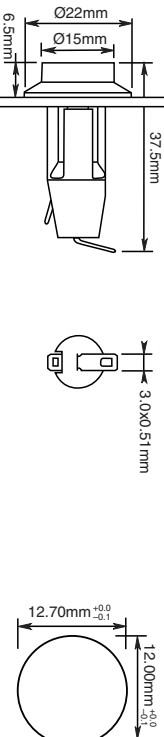

*Data Sheet: 2110*

### HTC-55M


**Ratings:** 250V, 6.3A, 2.5W  
Fuse carrier: bayonet type

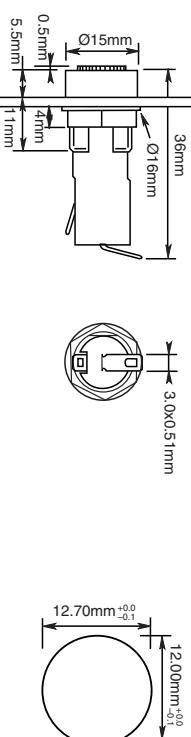

*Data Sheet: 2110*

### HTC-70M

**Ratings:** 250V, 10A, 2.5W  
Fuse carrier: bayonet type

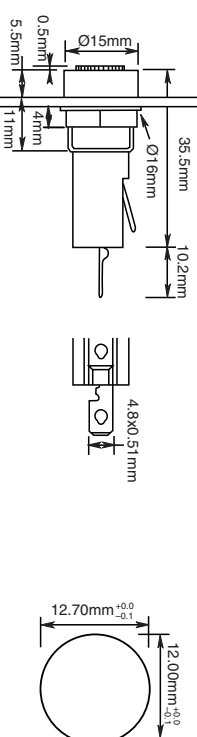

*Data Sheet: 2110*

### Specifications

**Terminals:** Brass, tin-plated.

**Molded Materials:** High temperature thermoplastic that meets the flammability ratings of UL 94V0; Glow Wire Test: 960°C per IEC 695-2-1.

**Solderability:** In accordance with IEC 68-2-20.

**Agency Information:** UL Recognized — Guide IZLT2, File E14853;

CSA Certified — Class 6225-01, File 47235;

SEMKO — 9226031 (HTC-30M, HTC-35M); 9226032 (HTC-40M); 9226033 (HTC-55M); 9226034 (HTC-70M)

**Electrical:** Contact Resistance: ≤ 10mΩ; Insulation Resistance: ≥ 10mΩ; Dielectric Strength ≥ 2000 Vac.

**Shock Safety:** PC2 (fuseholders).

**Packaging:** Standard Qty 10 (No Prefix), Bulk Qty 100 (Prefix Catalog Number with BK/).

CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.



For complete specification data, call Bussmann Information Fax ~ 636. 527. 1450