


| 8 | 7 | 6 | 5 |
|--------------------------|------------------------|--------------------|-----------------------------|
| BASE PART NUMBER | THICKNESS | MATERIAL | STANDARD LENGTH PART NUMBER |
| 0097-0645 (STANDARD) | 0.076 ± 0.005 [0.0030] | BeCu ALLOY 25 TH01 | 0097064502 |
| 0098-0645 (ULTRASOFT) | 0.051 ± 0.005 [0.0020] | BeCu ALLOY 25 TH01 | 0098064502 |

| PLATING CODE TABLE | |
|---|---------------|
| NUMBER CODE | PLATING TYPE |
| 02 | BRIGHT FINISH |
| 17 | BRIGHT TIN |
| 19 | BRIGHT NICKEL |
| MORE PLATING OPTIONS AVAILABLE CONTACT LAIRD SALES FOR DETAILS | |

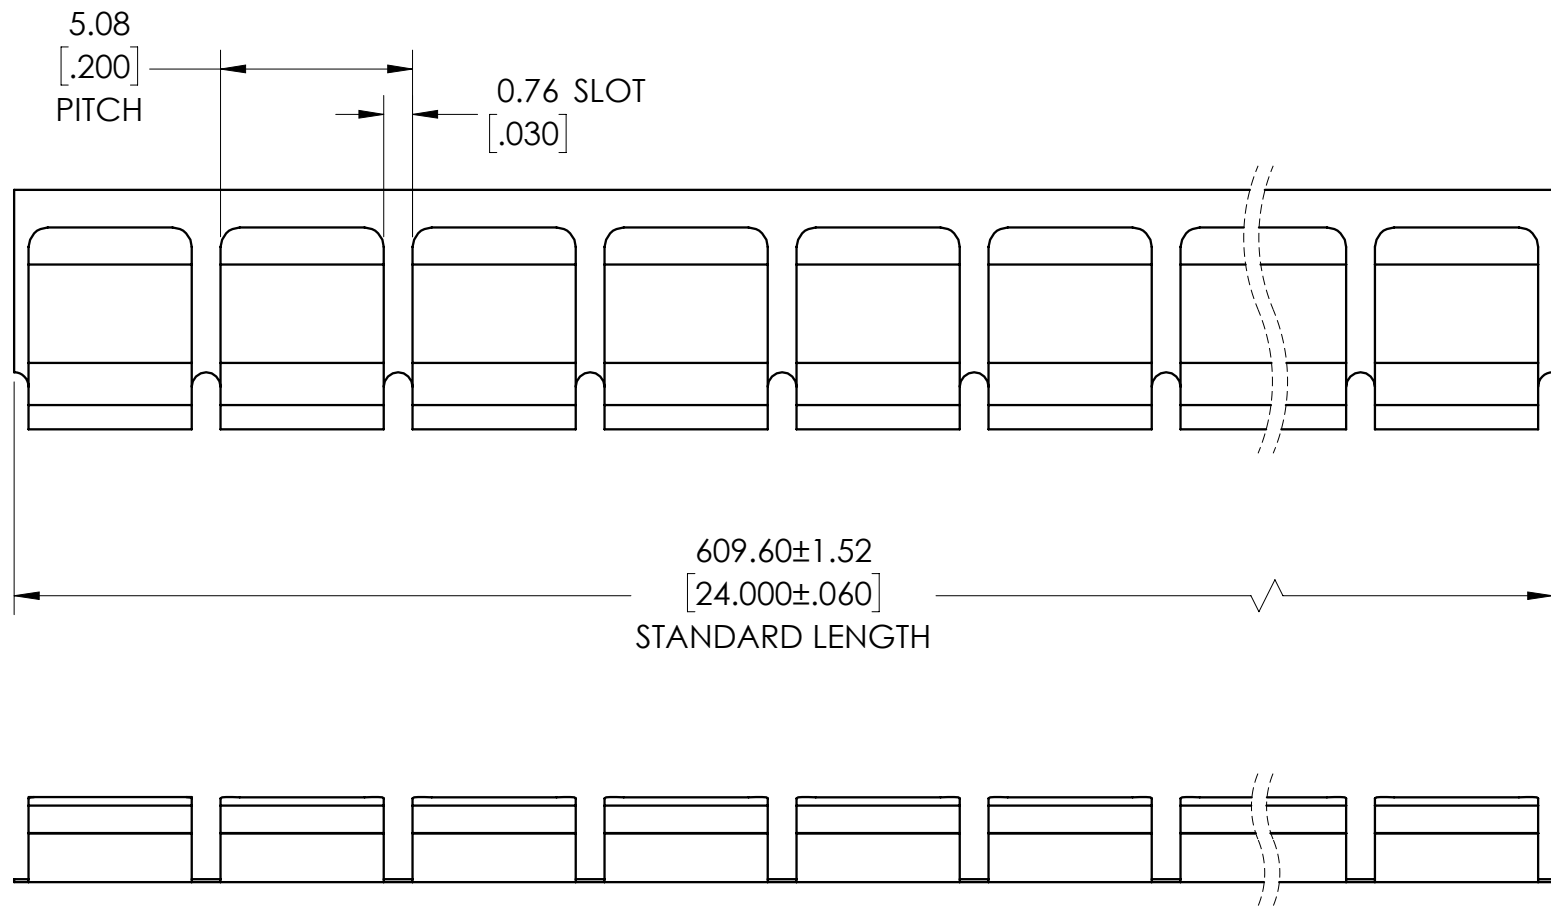

CUSTOM LENGTHS AVAILABLE IN MULTIPLES OF PITCHES OR "FINGERS"
 LENGTH = PITCH X N
 WHERE 'PITCH' IS 5.08 AND 'N' IS NUMBER OF PITCHES
 EXAMPLE: 42 x 5.08 = 213.36MM LONG
 SEE BOTTOM LEFT FOR CUSTOM LENGTH PART NUMBERING


CUSTOM LENGTH PART NUMBER CONFIGURATION:
 009X 0645 XX N OXXXX

7 FOR STANDARD
 8 FOR ULTRASOFT

PLATING CODE
 (SEE TABLE)

LENGTH IN MM TO
 ONE DECIMAL PLACE

EXAMPLE: 0098064517N02134
 ULTRASOFT, BRIGHT TIN PLATING, 213.36MM LONG (42 FINGERS)

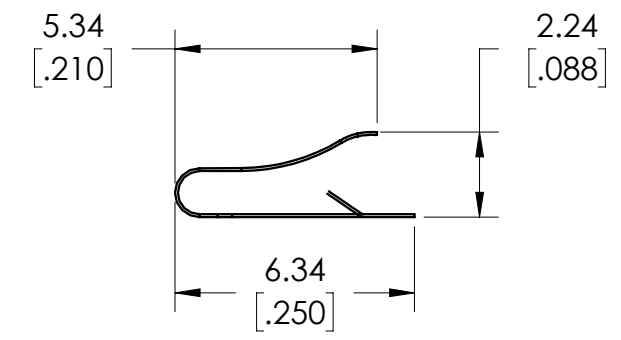

| | | |
|---|--|--|
| UNITS: MM [INCH] | Laird | LAIRD DRAWING NUMBER: 0097-0645-SALES |
| TOLERANCES: X.X = ± 0.4 X.XX = ± 0.2 X.XXX = ± 0.1 | | THIS IS AN UNCONTROLLED SALES DRAWING. THE DIMENSIONAL CHARACTERISTICS AND TOLERANCES OF THIS PART SHOWN ON THIS DRAWING AS A REFERENCE TO THE DIMENSIONAL SPECIFICATIONS OF THE LAIRD STANDARD PRODUCTION DRAWING FOR THIS PART. ANY SUBSEQUENT CHANGES TO THE STANDARD PART SPECIFICATION WILL SUPERSEDE THIS SALES DRAWING. |
| ANGULAR: X° = ± 3° X.X° = ± 1.0° | 3RD ANGLE PROJECTION DESIGNED IN SOLIDWORKS SCALE: 5:1 | SIZE B SHEET 1 OF 1 |