

Fast-Acting Subminiature Cartridge Fuse
Axial Leaded

multicomp^{PRO}

RoHS
Compliant



Description

This fast-acting fuse with low breaking capacity provides protection for printed circuit boards and is used in a large variety of applications. This Ø3.6 × 10mm device is constructed as a glass tube with electro-plated brass end caps. This fuse offers excellent quality and is 100% tested for cold resistance and precise length.

Features

- Subminiature fuse with fast-acting, low breaking capacity
- Ø3.6mm×10mm physical dimensions
- Glass tube, encapsulated design with nickel - plated brass end caps
- Protection against harmful over-currents in primary and secondary applications.
- Lead-free and Halogen-free
- Designed compliant to IEC60127-3/III

Specifications

Operating Temperature : -55°C to +125°C
Storage Conditions : +10°C to +60°C
Relative Humidity : ≤75% yearly average without dew, maximum 30 days at 95%
Vibration Resistance : 24 cycles at 15 min. each
10-60Hz at 0.75mm amplitude
60-2000Hz at 10g acceleration


Electrical Specifications

Time vs Current Characteristics Table
(measured with constant current power supply)

Time vs Current Characteristics: UL248-14			
Rated current	150%	210%	275%
2.5A and 3A	>1h	<30min	10ms~3s

Time vs Current Characteristics: UL248-14		
Rated current	400%	1000%
2.5A and 3A	3ms~400ms	≤20ms

Average Time Current (I-T) Curves

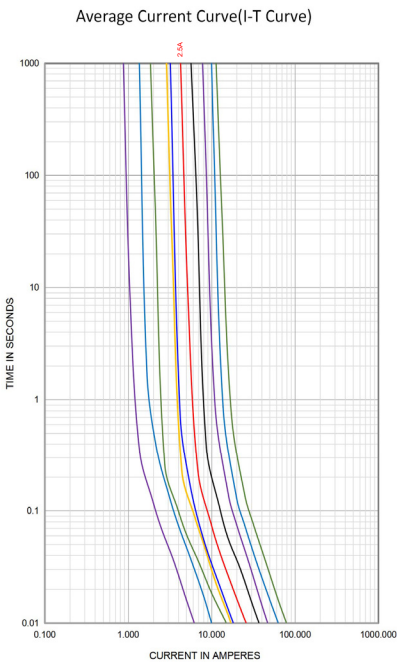

multicomp^{PRO}

Fast-Acting Subminiature Cartridge Fuse Axial Leaded

multicompPRO


Electrical Characteristics at 25°C

Part Number	Amp Code	Rated Current	Max Voltage Drop (mV)	Max. Power Dissipation (mW)	Typical Cold Resistance (mΩ)	Nominal Melting I²T (A²s)	Breaking Capacity
MP007129	1250	2.5A	200	1313	19.9	6.75	50A/125V AC 35A or 10In/250V AC
MP007128	1300	3A	180	1488	16.4	7.88	

Note:


- (1) Permissible continuous operating current is 100% at ambient temperature of 23°C (73.4°F)
- (2) The current values used for calculating I²T should be within the standard range of 8ms~10ms.

Temperature Derating Curve

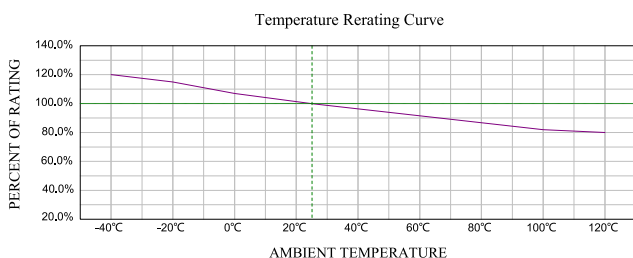


$$\text{Calculation for ideal fuse selection} = \frac{\text{Operating Current (A)}}{\text{Rating (\%} \times 0.75)}$$

Soldering Parameters

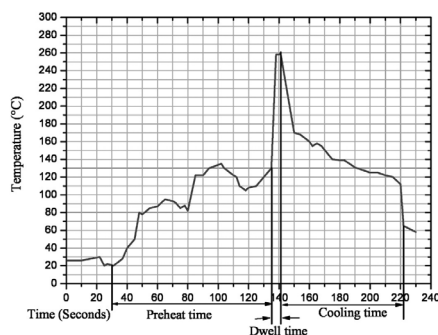

260°C ≤ 5 sec (Wave Soldering)
350°C ≤ 3 sec (Hand Soldering)
Soldering Peak:
260°C - 10 sec (IEC 60068-20)


Mechanical Specifications

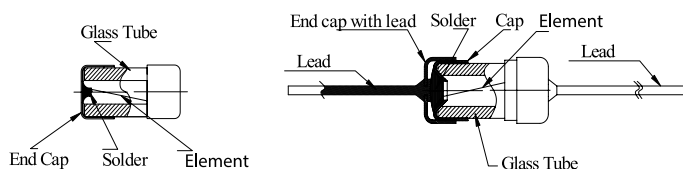

Fast-Acting Subminiature Cartridge Fuse Axial Leaded

multicompPRO

Diagram

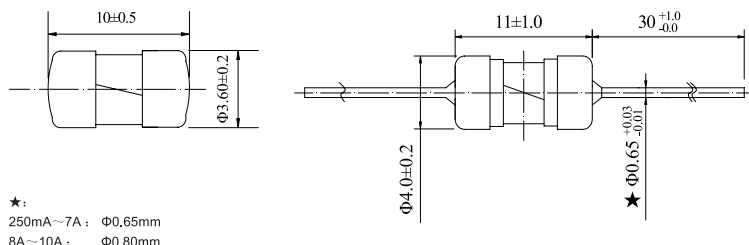

Dimensions : Millimetres

Part Number Table

Description	Part Number
Fast-Acting Subminiature Cartridge Fuse, Axial Leaded, 3A, 250V AC, 3.6mm × 10mm	MP007128
Fast-Acting Subminiature Cartridge Fuse, Axial Leaded, 2.5A, 250V AC, 3.6mm × 10mm	MP007129

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO