

AirMatrix[®] Surface Mount Fuses

QA2410F Series (Automotive Grade, 2410 Size)



Features:

- Automotive grade with AEC-Q200 Rev.E qualification
- Excellent inrush current withstanding capability
- Fiberglass enforced epoxy fuse body
- Copper or copper alloy composite fuse link
- Copper termination with nickel and tin plating

Clearing Time Characteristics:

% of current rating	Clearing time at 25°C	
	Min.	Max.
100%	4 hours	-
200% (1.0 - 10.0A)	0.01 seconds	5 seconds
200%	0.01 seconds	20 seconds

Shape and Dimensions:


Unit	Inch	mm
L	0.240 ± 0.006	6.10 ± 0.15
W	0.098 ± 0.006	2.49 ± 0.15
T	0.085 ± 0.008	2.16 ± 0.20
BW	0.053 ± 0.015	1.35 ± 0.38

Applications:

- Communications & Networks
- Infotainment systems
- BMS
- Under-the-hood applications

Agency Approval:

- Recognized Under the Components Program of Underwriters Laboratories. Certification #: UL-E232989.




Ordering Information:

Part Number	Current Rating (A)	Voltage Rating (V DC)	Interrupting Ratings	Nominal DCR (Ω) ¹	Nominal I^2t (A^2s) ²	Marking ³
QA2410F1A00T	1.00	250	100A @250V DC 300A @ 32V DC	0.093	0.59	E
QA2410F1A25T	1.25			0.070	0.96	F
QA2410F1A50T	1.50			0.060	1.19	G
QA2410F2A00T	2.00			0.042	2.75	I
QA2410F2A50T	2.50	125	50A @125 V DC 300A @ 32 V DC	0.031	1.21	J
QA2410F3A00T	3.00			0.0249	1.73	K
QA2410F3A15T	3.15			0.0230	2.20	V
QA2410F3A50T	3.50			0.0210	2.50	L
QA2410F4A00T	4.00			0.0175	3.30	M
QA2410F5A00T	5.00			0.0146	5.90	N
QA2410F6A30T	6.30			0.0100	12.50	O
QA2410F7A00T	7.00			0.0097	14.20	P
QA2410F8A00T	8.00			0.0085	16.50	R
QA2410F10A0T	10.0			0.0068	29.20	Q
QA2410F12A0T	12.0	65	50A @65V DC 300A @32V DC	0.0053	39.30	X
QA2410F15A0T	15.0			0.0037	102.5	Y
QA2410F20A0T	20.0			0.0029	126.2	Z

1. Measured at $\leq 10\%$ rated current and 25°C ambient. 2. Melting I^2t at 0.001 second pre-arcing time. 3. Blue Marking Character Code.


AirMatrix[®] Surface Mount Fuses
QA2410F Series (Automotive Grade, 2410 Size)

Average Pre-arcing Time Curves:

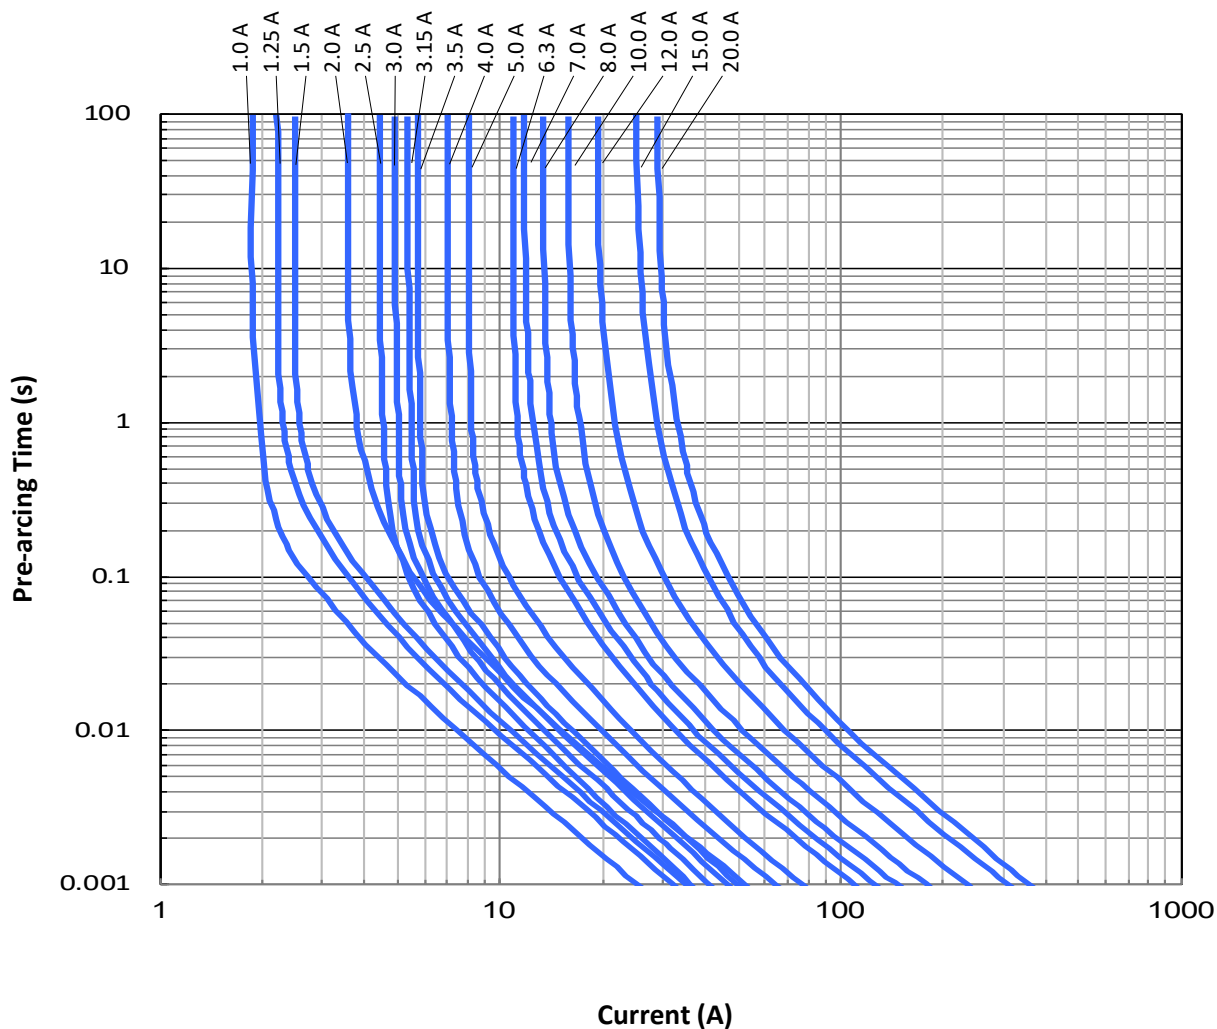


AirMatrix[®] Surface Mount Fuses
QA2410F Series (Automotive Grade, 2410 Size)

Average I²t vs. t Curves:

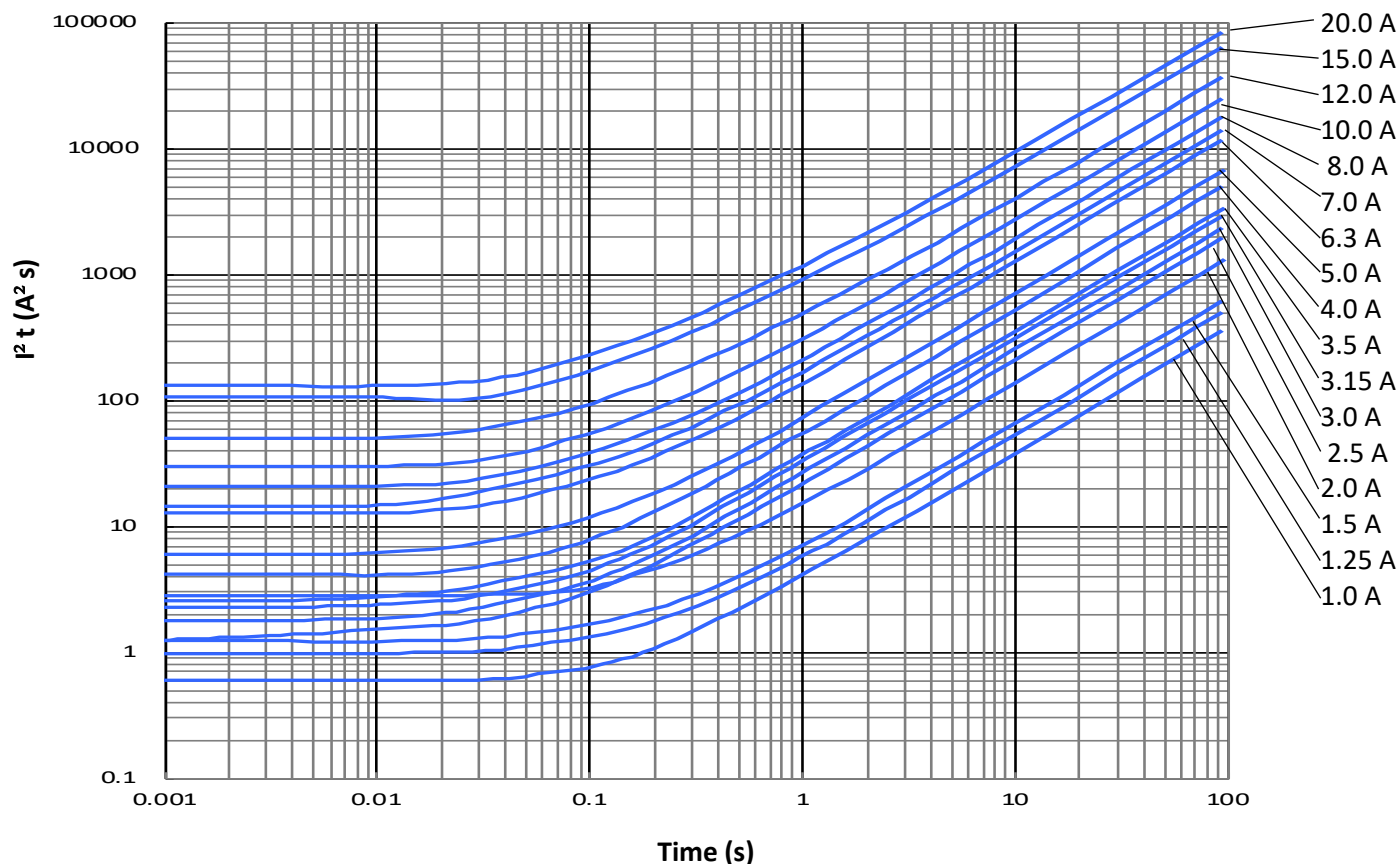

Temperature De-rating:

The ambient temperature affects the current carrying capacity of fuses. When a fuse is operating at a temperature higher than 25°C, the fuse shall be “de-rated” according to the de-rating curve.

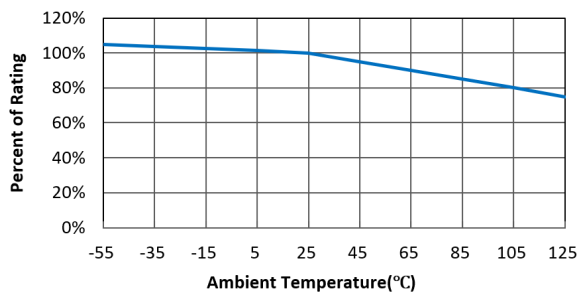

Operating Temperature Range:

-55°C ~+125°C (with de-rating)

Product Identification:

QA 2410 F 2A00 T

(1) (2) (3) (4) (5)

- (1) **Series Code:** QA - Automotive Grade AirMatrix Chip Fuse
- (2) **Size Code:** L x W (inch), the first two digits - L (length), the last two digits - W (width)
- (3) **Characteristic Code:** F – fast acting
- (4) **Current Rating Code:** 2A00 - 2.0A
- (5) **Package Code:** T: 2K Tape & Reel, T-7: 7K Tape & Reel, B - Bulk

AirMatrix[®] Surface Mount Fuses

QA2410F Series (Automotive Grade, 2410 Size)

Reliability Tests:


No.	Item	Test Condition	Criteria
1	High temperature storage	Subject fuses to +125°C for 1000 hours	DCR change within ±10%, no damage
2	Low temperature storage	Subject fuses to -65°C for 1000 hours	DCR change within ±10%, no damage, Post Electrical Test not required
3	Temperature Cycling	Subject fuses to 1000 temperature cycles 30min at -65°C lowest temp and 30min at +125°C highest temp	DCR change within ±10%, no damage
4	Biased Humidity	Subject fuses to +85°C/85%RH with 10% rated current for 1000 hours	DCR change within ±10%, no excessive corrosion
5	High Temperature Operating Life	+125°C for 1000 hours. Load setting : 75%(current de-rating) *75%(temp. de-rating per series) * Rated current	DCR change within ±10%, no damage
6	Mechanical Vibration	0.4" D.A. or 30G between 5 and 3000 Hz, along 3 mutually perpendicular axes for a total of 12 hours	DCR change within ±10%, no mechanical damage
7	Mechanical Shock	1500G, 0.5 ms, half sine shocks in 6 major directions along 3 mutually perpendicular axes	DCR change within ±10%, no mechanical damage
8	Resistance to Soldering Heat	One dip at 260°C, 10 seconds.	DCR change within ±20% of > 1A or ±10% of ≤ 1A, no damage,
9	Salt spray	5% salt solution, 48 hours exposure	DCR change within ±10%, no excessive corrosion, Post Electrical Test not required
10	Solderability	245°C , 5 seconds	New solder coverage ≥ 95%, Post Electrical Test not required
11	Terminal Strength	Apply 17.7N (1.8kg) force gradually to the side of the fuse, this force shall be applied for 60 seconds	DCR change within ±10%, no mechanical damage
12	Board Flex	Apply a force that will bend the board distance of x = 6 mm, and the duration of the applied forces shall be 60 seconds	DCR change within ±20% of > 1A or ±10% of ≤ 1A, no mechanical damage
13	Resistance to Solvents	Completely immersed in solvent solutions for 3 minutes, brushed the marking surface for ten strokes; repeated total 3 times	Marking shall remain legible and no discoloration, DCR change within ±10%
14	Electrical Characterization	Conducted Electrical Characterization test at minimum, ambient and maximum operating temperatures; Current Carrying Capacity test with temperature de-rating; overload test 200% current rating	Current Carrying Capacity: 4 hours Min; 200% Overload :0.01~ 5 seconds for 1.0~10A, 0.01~20seconds for >10A; Max; Interrupting Test: meet Interrupting Ratings capability
15	Post -stress Electrical Test	Current Carrying Capacity: Half of samples, test at room Ambient. Overload Test :Half of samples, test at room Ambient and 200% current rating	Current Carrying Capacity: 4 hours Min; 200% Overload :0.01~ 5 seconds for 1.0~10A, 0.01~20seconds for >10A

AirMatrix[®] Surface Mount Fuses

QA2410F Series (Automotive Grade, 2410 Size)

Recommended Land Pattern:


Chip Size	2410 (6125)	Unit
L	0.338 (8.60)	Inch (mm)
G	0.118 (3.00)	Inch (mm)
H	0.124 (3.15)	Inch (mm)

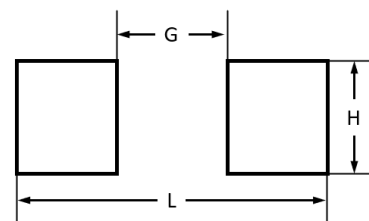

Recommended Temperature Profile:

Profile Feature	Pb-Free Assembly
Preheat/Soak	
Temperature Min (T_{smin})	150°C
Temperature Max (T_{smax})	200°C
Time (t_s) from (T_{smin} to T_{smax})	60~120 seconds
Ramp-up rate (T_L to T_p)	3°C/second max.
Liquidous temperature (T_L)	217°C
Time (t_L) maintained above T_L	60~150 seconds
Peak package body temperature (T_p)	260°C
Time (t_p)* within 5°C of the specified classification temperature (T_c)	30 seconds *
Ramp-down rate (T_p to T_L)	6°C/second max.
Time 25°C to peak temperature	8 minutes max.
* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum	

* Recommended Temperature Profile for Reflow Soldering

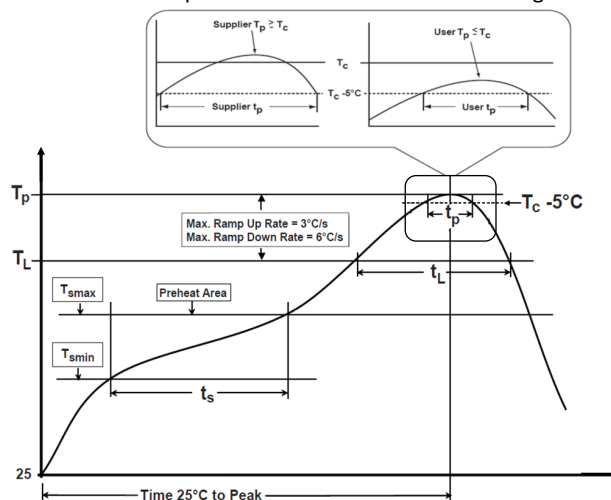

Recommended conditions for hand soldering:

- Appropriate temperature (max.) of soldering iron tip/soldering time (max.): 280°C / 10 s or 350°C / 3 s
- Using hot air rework station with tip that can melt the solder on both terminations at the same time is strongly recommended. Do not directly contact the chip termination with the tip of soldering iron.

Storage:

- The maximum ambient temperature shall not exceed 35°C . Storage temperatures higher than 35°C could result in the deformation of packaging materials.
- The maximum relative humidity recommended for storage is 75%. High humidity with high temperature can accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components.
- The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.
- MSL=1

Packaging:

Chip Size	Parts on 7 inch (178 mm) Reel	Parts on 13 inch (330 mm) Reel
2410 (6125)	2,000	7,000

Disclaimer

Specifications are subject to change without notice. AEM products are designed for specific applications and should not be used for any purpose (including, without limitation, automotive, aerospace, medical, life-saving applications, or any other application which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property) not expressly set forth in applicable AEM product documentation. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Warranties granted by AEM shall be deemed void for products used for any purpose not expressly set forth in applicable AEM product documentation. AEM shall not be liable for any claims or damages arising out of products used in applications not expressly intended by AEM as set forth in applicable AEM product documentation. The sale and use of AEM products is subject to AEM terms and conditions of sale. Please refer to AEM's website for updated catalog and terms and conditions of sale.



AEM Components (Suzhou) Co., Ltd

**461 Zhongnan Street,
China-Singapore Suzhou Industrial Park
Jiangsu, P. R. China, 215026**

Tel: 86-512-6258-0028

Fax: 86-512-6258-0018

Email: marketing@aemchina.com

AEM Components (USA), Inc.

6670 Cobra Way, San Diego, CA 92121, USA

Tel: 1-858-750-6100

Fax: 1-858-481-1123

Email: sales@aemcomponents.com