


LFL2-CK-U-PVC3
LFL2-CK-U-PVC5
LFL2-CK-U-CSM3
LFL2-CK-U-CSM5

LFL2-BK-U-PVC3
LFL2-BK-U-PVC5
LFL2-BK-U-CSM3
LFL2-BK-U-CSM5


The micro switch (change over) is build into a PP-float and switches when out of the horizontal line. The switching ball is running on-axis and changes the state of the micro switch.

The float is mounted either from side-wards through a cable gland $\geq$ G1A into the vessel or by means of an additional mass, or rods (e.g. float switch combination) from the top.


The pivot of the cable should always be horizontal. The minimum length of the cable between mounting and float is depending of the cable material (see technical data).

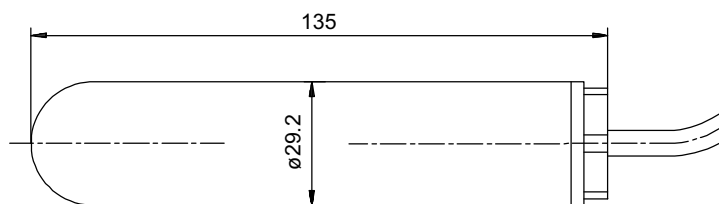

Cylinder type LFL2-CK

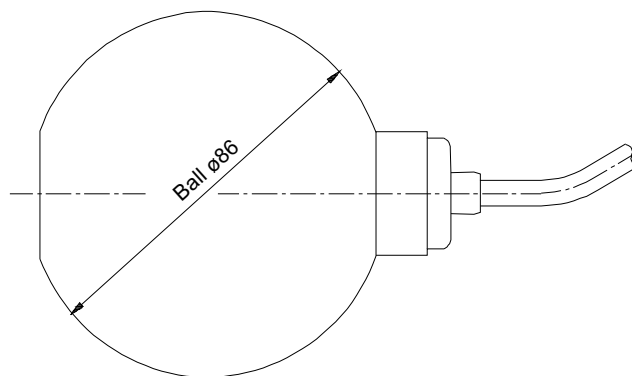

Ball type LFL2-BK

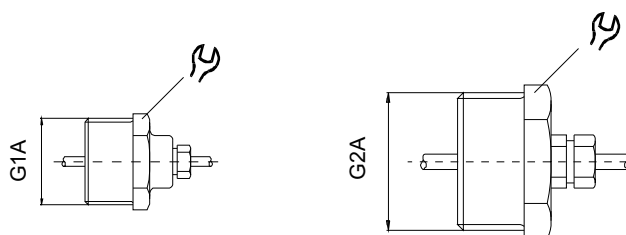

Accessories: cable gland

LFL 2 - ☐ **K - U -** ☐☐☐☐
 cable length
 cable material
 float type

cable colors		rising level
black-brown	=	contact opened
black-blue	=	contact closed



Technical data Switching element Switching function max. switching voltage max. switching current Switching angle	Micro switch with switching ball Changeover AC 250 V, DC 250 V 3 (1) A upper switching point +18°(± 6°), lower switching point +5°(±3°), against the horizontal
Process conditions Temperature LFL2-□K-U-PVC□ LFL2-□K-U-CSM□ Pressure (20 °C) Cylinder type Ball type Density ρ Cylinder type Ball type	-20 °C ... +70 °C (253 K ... 343 K) -20 °C ... +100 °C (253 K ... 373 K) ≤ 3 bar ≤ 2 bar ≥ 0.8 g/cm ³ ≥ 0.6 g/cm ³
Material of the float	PP (Polypropylene)
Cable Material and length LFL2-□K-U-PVC3 LFL2-□K-U-PVC5 LFL2-□K-U-CSM3 LFL2-□K-U-CSM5 Application range PVC CSM Minimum length of the cable between mounting and float PVC CSM	PVC-cable, highly flexible (3 x 0.75 mm ²), 3 m PVC-cable, highly flexible (3 x 0.75 mm ²), 5 m CSM-cable (Hypalon), highly flexible (3 x 0.75 mm ²), 3 m CSM-cable (Hypalon), highly flexible (3 x 0.75 mm ²), 5 m preferably for water, waste water, and aggressive liquids preferably for most acids and lies ≥ 50 mm ≥ 100 mm
Mounting from outside, sideways from top	with cable gland (cylinder type) with additional mass or float switch combination
Accessories LFL-Z131 LFL-Z132 LFL-Z161 LFL-Z231 LFL-Z31 LFL-Z431 LFL-Z432 LFL-Z461	Ordering number Cable gland G1A, PVC Cable gland G1A, brass Cable gland G2A, PVC Lock nut, G1A, PVC Counter weight 2" Cable gland 1"NPT, PVC Cable gland 1"NPT, brass Cable gland 2"NPT, PVC

This device may be used with any circuit, if this circuit complies with the connection values of the switching element.