
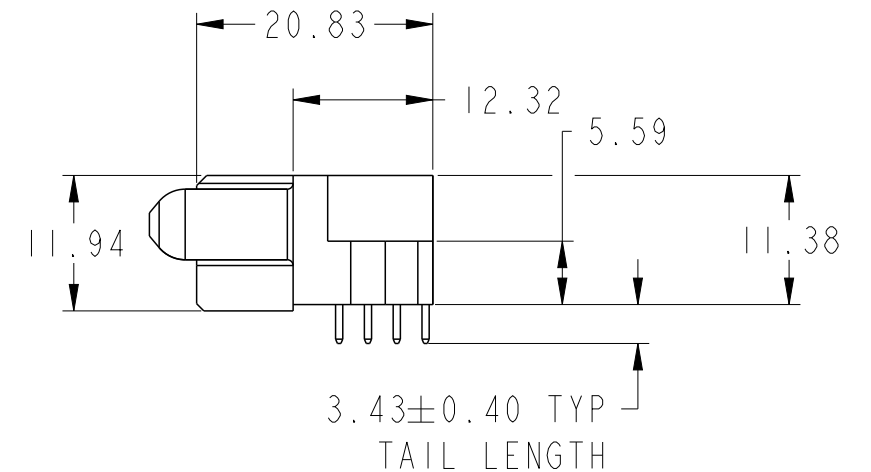
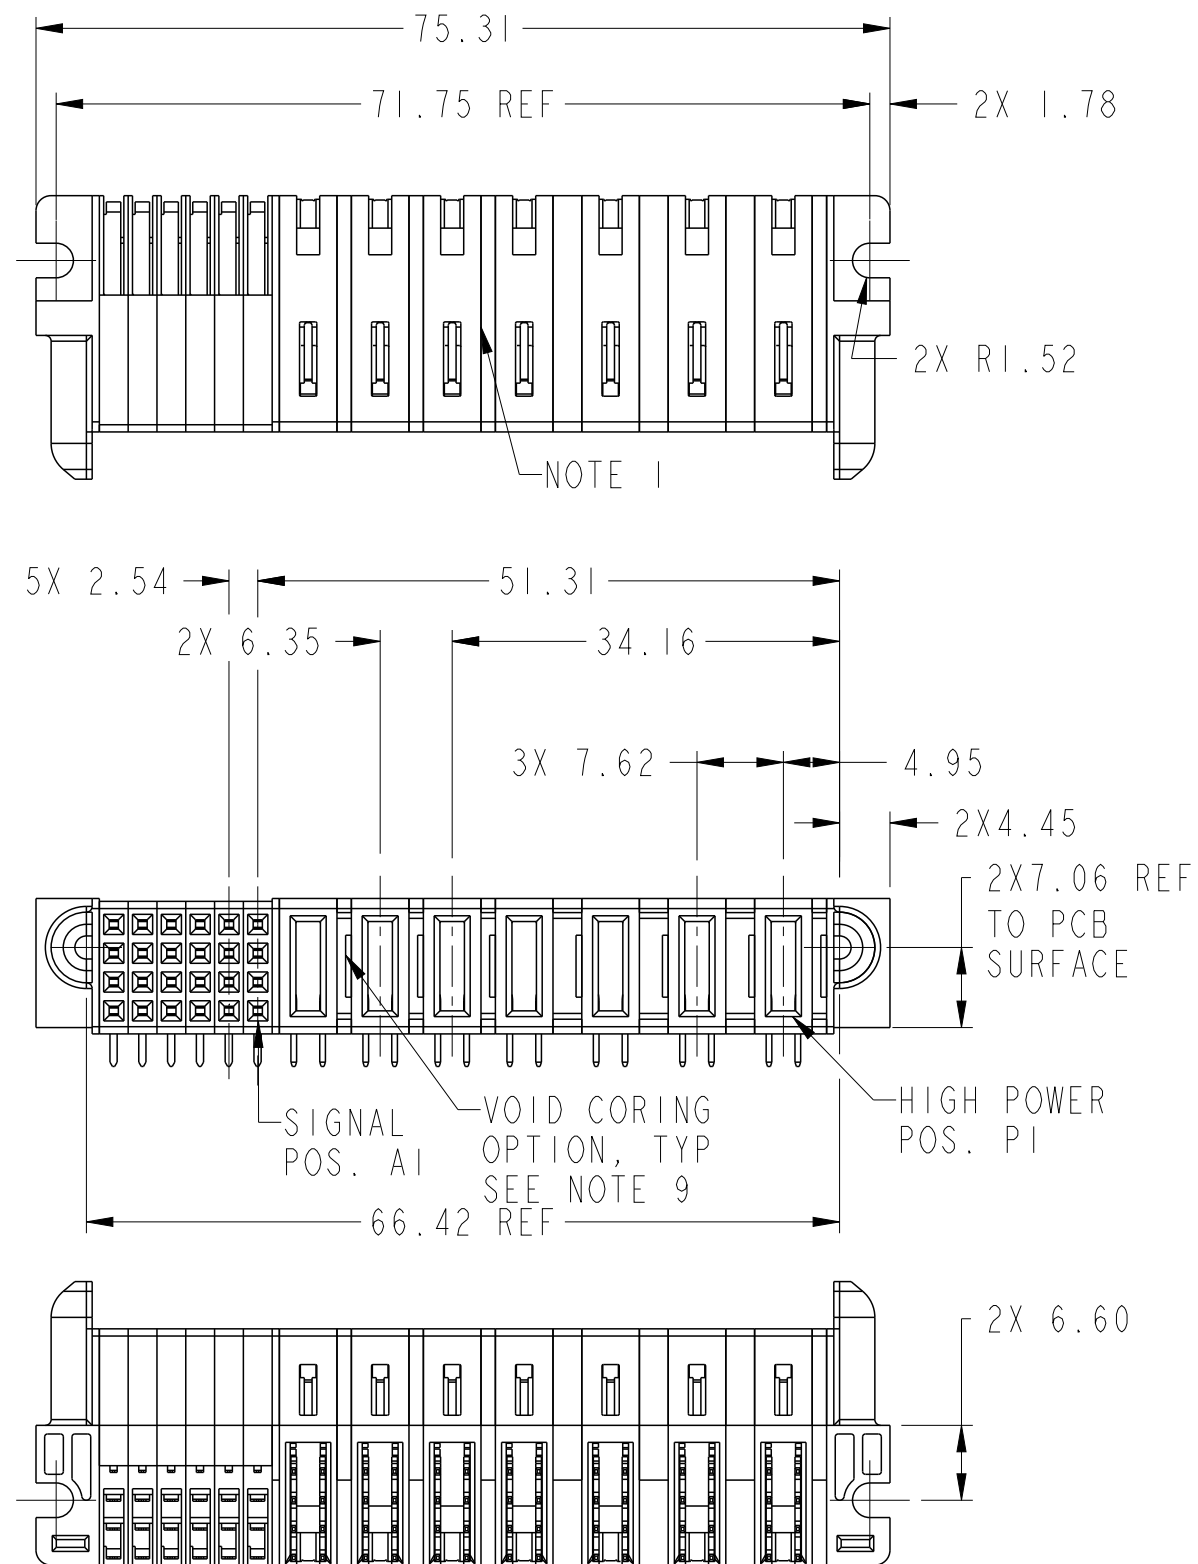



PRODUCT NUMBER SEE SHEET 2




spec ref		*		dr		Peng-Bing Fu		2013/03/26		projection				size		A3		scale		3:2	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Peng-Bing Fu		2013/04/23						ecn no		-					
ASME Y14.5				chr		-		-													
appr				Pei-Ming Zheng		2013/04/23		product family						PwrBlade+		rel level		Released			
surface		linear		0.X		±0.5				title		3ACP + 4HP+24S		dwg no		10106264-7006001		rev		A	
ASME Y14.5		0.XX		±0.25		RA STB RECEPTACLE															
angular		0°		±2°		www.fci.com															

PRODUCT NO.	ROW S	SIGNAL							HP			HIGH POWER					CODE	DESCRIPTION
		E1	6	5	4	3	2	1	P7	P6	P5	P4	P3	P2	P1	E2		
10106264-7006001LF	D C B A		H	H	H	H	H	H										
			G	G	G	G	G	G										
			F	F	F	F	F	F										
			E	E	E	E	E	E										
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																		

E	STD SIGNAL CONTACT, ROW A
F	STD SIGNAL CONTACT, ROW B
G	STD SIGNAL CONTACT, ROW C
H	STD SIGNAL CONTACT, ROW D
H1	MFBL HIGH POWER CONTACT(3.43)
H3	STD HIGH POWER CONTACT(3.43)

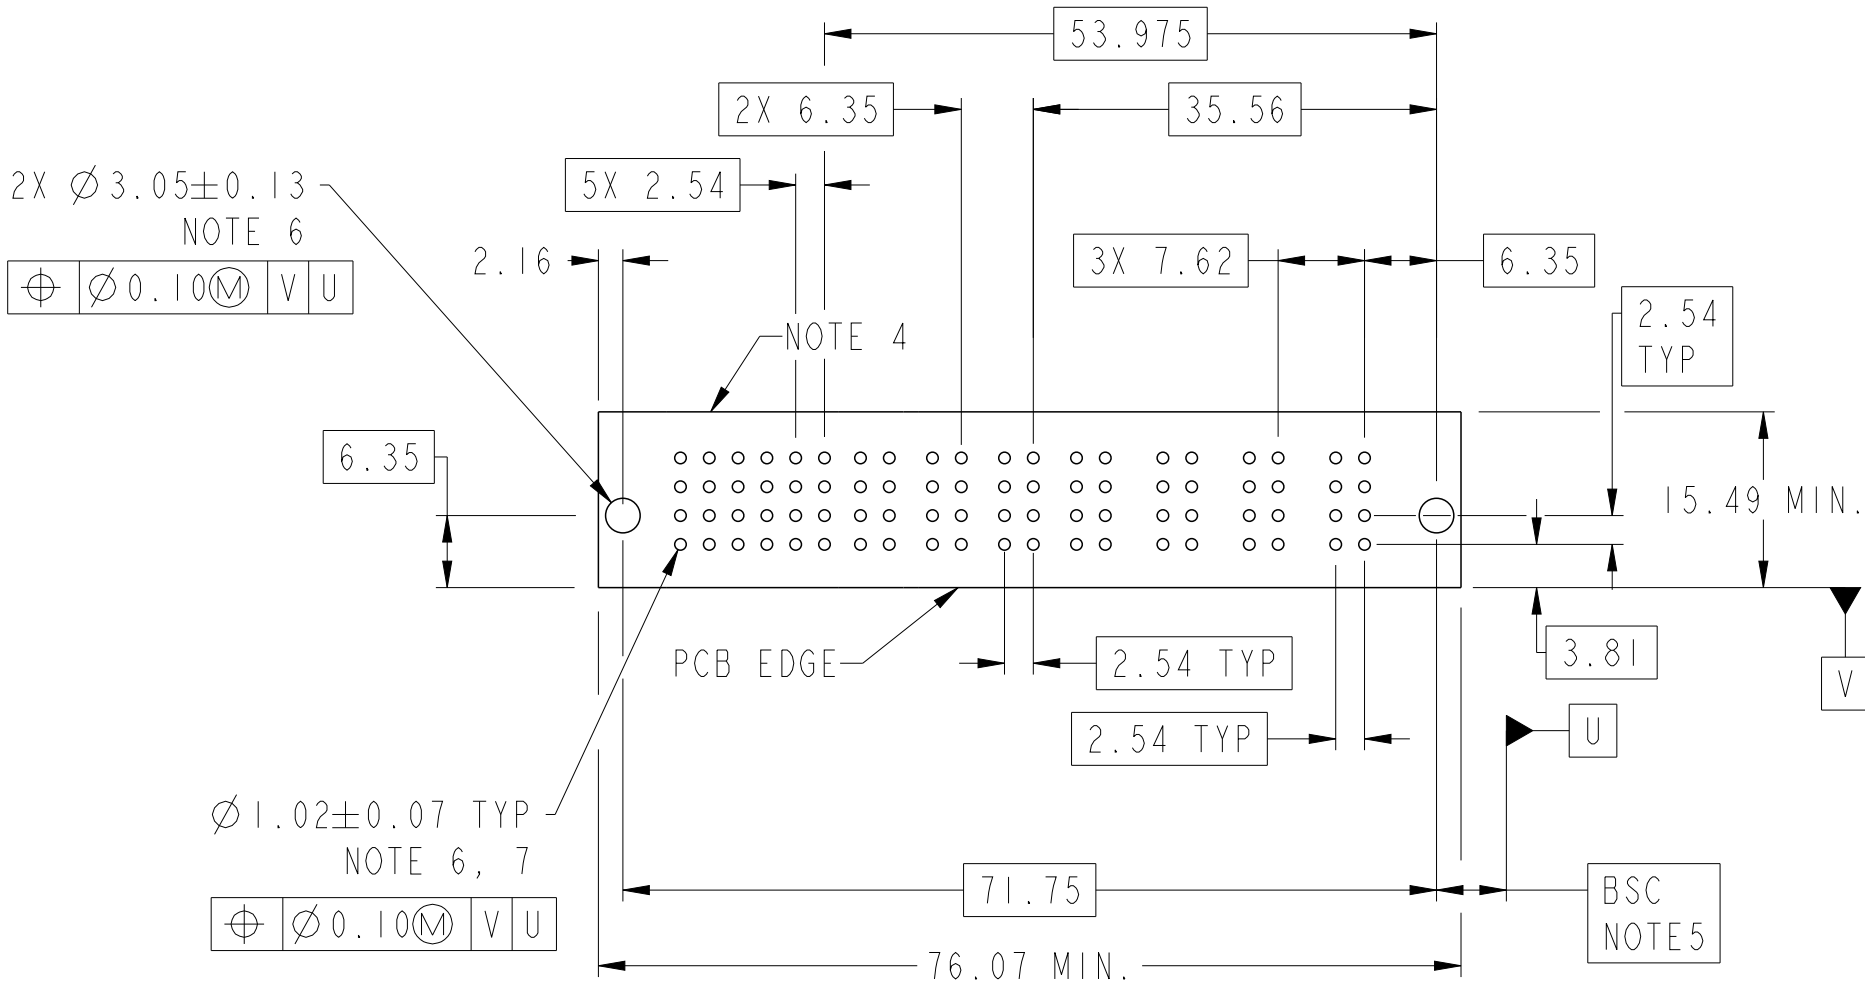

dr	Peng-Bing Fu	2013/03/26	projection 	MM 	size	A3	scale	3:2		
eng	Peng-Bing Fu	2013/04/23			ecn no	-				
chr	-	-			rel level	Released				
appr	Pei-Ming Zheng	2013/04/23	product family		PwrBlade+					
	title	3ACP + 4HP+24S RA STB RECEPTACLE			dwg no	10106264-7006001		rev	A	
www.fci.com	cat. no.		Product - Customer Drw				sheet 2 of 3			

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - SIGNAL CONTACT - COPPER ALLOY.
 - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Peng-Bing Fu	2013/03/26	projection	MM	size	A3	scale	3:2
eng	Peng-Bing Fu	2013/04/23			ecn no	-		
chr	-	-						
appr	Pei-Ming Zheng	2013/04/23	product family	PwrBlade+	rel level	Released		
FCi		title 3ACP + 4HP+24S RA STB RECEPTACLE			dwg no 10106264-7006001		rev	
							A	
www.fci.com		cat. no.		Product - Customer Drw			sheet 3 of 3	



Copyright FCI.