
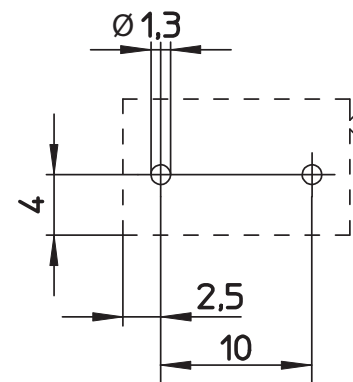
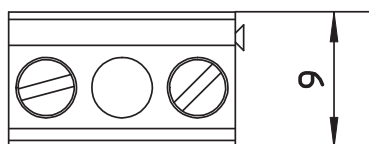
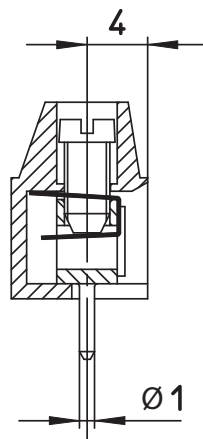


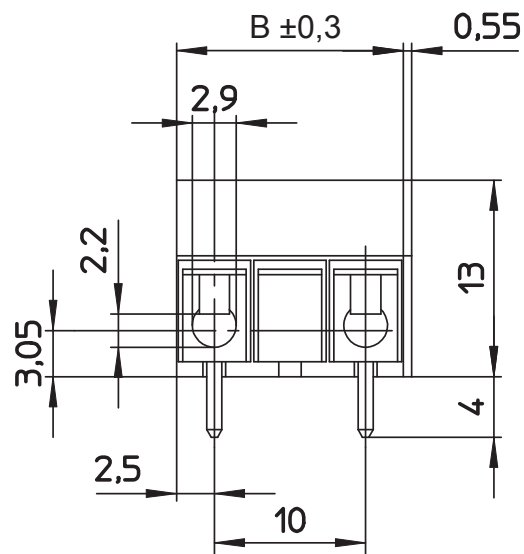

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PC
FLAMMABILITY RATING: UL94V0
COLOR: GREY
METAL HOUSING: COPPER ALLOY / Ni+Sn
TERMINAL SCREW: STEEL / Zn
WIRE GUARD: COPPER ALLOY / Sn

ENVIRONMENTAL
OPERATING TEMPERATURE: -30°C UP TO +120°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	UL	VDE
CURRENT RATING:	16A	24A
WORKING VOLTAGE:	300VAC	750VAC
WITHSTANDING VOLTAGE:	1,6KV	3KV
CONTACT RESISTANCE:	20 mΩ	MAX

STANDARD

RA **US** CERTIFIED: E150931

 CERTIFIED: 40021375

CAT. N°: CMM (1)

TYPE: CMM

MECHANICAL

SOLID WIRE: 30-14 AWG / 0,05-2,08 mm²

STRANDED WIRE: 30-14 AWG / 0,05-2,08 mm²

TORQUE: 4Lb.In / 0.5 Nm

WIRE STRIPE LENGTH: 7 mm

SCREW: M3



PITCH: 10 mm

SOLDERING

JEDEC LEAD FREE WAVE SOLDERING

PACKAGING

BOX

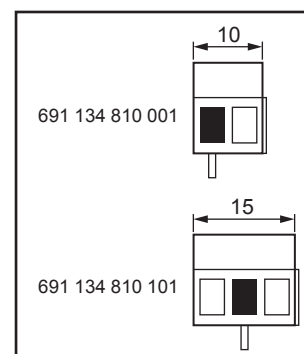

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE ±0,1	 WÜRTH ELEKTRONIK	
G							
F							
E							
D							
C				APPROVAL: QL	UNIT: MM	DESCRIPTION: SERIE 1348 - 10.00 MM - HORIZONTAL CABLE ENTRY WITH PRESSURE CLAMP - GLOW WIRE PLASTIC - WR-TBL WERI PART NO: 691 134 810 0xx	SIZE A4
B	01-SEP-15	ADD VIEW	AK		SCALE:		
A	19-AUG-14	PDF	AK		SHEET: 1/2		
REV	DATE	FILE	BY		DRAW: AK		

